

TEST REPORT

Applicant: Innovative Eyewear Inc.
Address: 11900 Biscayne Blvd Suite 630 North Miami, Florida 33181
Equipment Type: Reebok Nautica Eddie Bauer Lucyd Smart Eyewear
Model Name: LCD011 (refer to section 2.3)
Brand Name: Lucyd
FCC ID: 2BBYK-LCD011
ISED Number: 30961-LCD011
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen Issue 5
RSS-247 Issue 4
(refer to section 3.1)
Sample Arrival Date: Dec. 08, 2025
Test Date: Dec. 16, 2025 - Jan. 25, 2026
Date of Issue: Apr. 10, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Yang Wenxuan

Checked by: Ye Hongji

Approved by: Tolan Tu
(Testing Director)



Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Apr. 10, 2026</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION	4
1.1 Test Laboratory	4
1.2 Test Location	4
2 PRODUCT INFORMATION	5
2.1 Applicant Information	5
2.2 Manufacturer Information	5
2.3 General Description for Equipment under Test (EUT)	5
2.4 Technical Information	6
3 SUMMARY OF TEST RESULTS	8
3.1 Test Standards	8
3.2 Test Verdict	9
4 GENERAL TEST CONFIGURATIONS	10
4.1 Test Environments	10
4.2 Test Equipment List	10
4.3 Test Software List	10
4.4 Measurement Uncertainty	11
4.5 Description of Test Setup	11
4.6 Measurement Results Explanation Example	14
5 TEST ITEMS	15
5.1 Antenna Requirements	15
5.2 Output Power	16
5.3 Occupied Bandwidth	18
5.4 Conducted Spurious Emission	19
5.5 Band Edge (Authorized-band band-edge)	21

5.6 Conducted Emission	23
5.7 Radiated Spurious Emission	24
5.8 Band Edge (Restricted-band band-edge)	29
5.9 Power Spectral density (PSD)	30
ANNEX A TEST RESULT	31
A.1 Output Power, E.I.R.P	31
A.2 Occupied Bandwidth	36
A.3 Conducted Spurious Emissions	43
A.4 Band Edge (Authorized-band band-edge)	52
A.5 Conducted Emissions	56
A.6 Radiated Spurious Emission	58
A.7 Band Edge (Restricted-band band-edge)	67
A.8 Power Spectral Density (PSD)	69
ANNEX B TEST SETUP PHOTOS	73
ANNEX C EUT EXTERNAL PHOTOS	73
ANNEX D EUT INTERNAL PHOTOS	73

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☐ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☒ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ Building 2, Intelligent Connected Vehicle Industrial Park, No. 55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong Province, China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The CAB identifier number is CN0030.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Innovative Eyewear Inc.
Address	11900 Biscayne Blvd Suite 630North Miami, Florida 33181

2.2 Manufacturer Information

Manufacturer	Innovative Eyewear Inc.
Address	11900 Biscayne Blvd Suite 630North Miami, Florida 33181

2.3 General Description for Equipment under Test (EUT)

EUT Name	Reebok Nautica Eddie Bauer Lucyd Smart Eyewear
Model Name Under Test	LCD011
Series Model Name	LCD011-10, LCD011-11, LCD011-20, LCD011-21, LCD011-30, LCD011-40, LCD011-XX
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in color and size of frame. (this information provided by the applicant)
Serial Number	ZH2026LCD011
Hardware Version	v3.0
Software Version	v2.2
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE)
-----------------------------------	------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	DTS			
Modulation Type	GFSK			
Product Type	☐ Mobile ☒ Portable ☐ Fix Location			
Transfer Rate	1 Mbps, 2 Mbps			
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.			
Number of Channel	40 (at intervals of 2 MHz) ^{Note 1}			
Tested Channel	1 Mbps: 0 (2402 MHz), 19 (2440 MHz), 39 (2480 MHz) 2 Mbps: 1 (2404 MHz), 19 (2440 MHz), 38 (2478 MHz)			
Antenna Type	<table border="1"> <tr> <td>Left Ear</td> <td rowspan="2">Ceramic Antenna</td> </tr> <tr> <td>Right Ear</td> </tr> </table>	Left Ear	Ceramic Antenna	Right Ear
Left Ear	Ceramic Antenna			
Right Ear				
Antenna Gain	<table border="1"> <tr> <td>Left Ear</td> <td rowspan="2">2.7 dBi</td> </tr> <tr> <td>Right Ear</td> </tr> </table>	Left Ear	2.7 dBi	Right Ear
Left Ear	2.7 dBi			
Right Ear				
Antenna Impedance	50Ω			
Antenna System (MIMO Smart Antenna)	N/A			
Note 1: 2 Mbps does not support Channel 0, Channel 12, and Channel 39.				

All channel was listed on the following table:

BLE 1M:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

BLE 2M:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
\	\	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	\	\	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	\	\

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
3	RSS-247 Issue 4	Digital Transmission Systems, Frequency Hopping Systems and LicenceExempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands
4	ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024	American National Standard for Procedures for Compliance Testing of Unlicensed Wireless Devices
5	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Test Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-247, 6.5 (c)	N/A	--	Pass ^{Note1}
2	Output Power	15.247(b)	RSS-247, 6.3.2	Low/Middle/High	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247(a)	RSS-GEN, 6.7; RSS-247, 6.3.1(a)	Low/Middle/High	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	RSS-247, 6.6	Low/Middle/High	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247(d)	RSS-247, 6.6	Low/High	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 6.6	Low/Middle/High	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 6.6	Low/High	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	RSS-247, 6.3.1(b)	Low/Middle/High	ANNEX A.8	Pass
10	Receiver Spurious Emissions	--	RSS-Gen, 7.3	--	N/A	N/A ^{Note2}

Note¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	42% to 69%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+20.2℃ to +25.8℃
Working Voltage of the EUT	NV (Normal Voltage)	3.8 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY54420186	2025.05.21	2026.05.20
Power meter	R&S	NRP8S	101498	2025.07.07	2026.07.06
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Test Antenna-Bi-Log	Schwarzbeck	VULB 9163	01414	2023.11.03	2026.11.02
Test Antenna-Horn	Schwarzbeck	BBHA 9120D	02459	2023.10.26	2026.10.25
Test Antenna-Loop	Schwarzbeck	FMZB 1513-60	00015	2024.05.07	2026.05.06
Anechoic Chamber	YIHENG	C8-966	107	2024.05.12	2027.05.11
EMI Receiver	Keysight	N9038A	MY55330121	2025.04.16	2026.04.15
Filtering unit	balun	SU319F	LW-SZ19D0001 F01	N/A	N/A
Switching unit	BALUN	SU319	LW-SZ19D0001 S01	N/A	N/A
EMI Receiver	keysight	N9038B	MY61380132	2025.04.01	2026.03.31
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK8127	01009	2025.07.15	2026.07.14
Shielded Enclosure	YiHeng Electronic Co., Ltd	4.3m*2.9m*2. 4m	235	2024.11.05	2027.11.04
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2025.06.16	2026.06.15
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2025.11.26	2026.11.25
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7. 35m	130	2024.07.13	2027.07.12

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

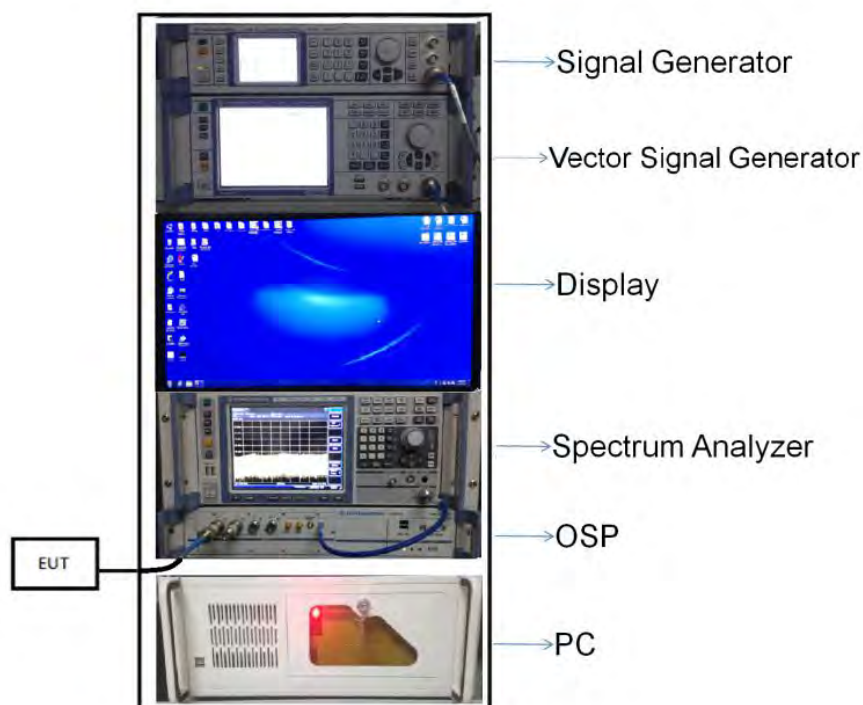


(Diagram 1)

4.5.2 For AC Power Supply Port Test

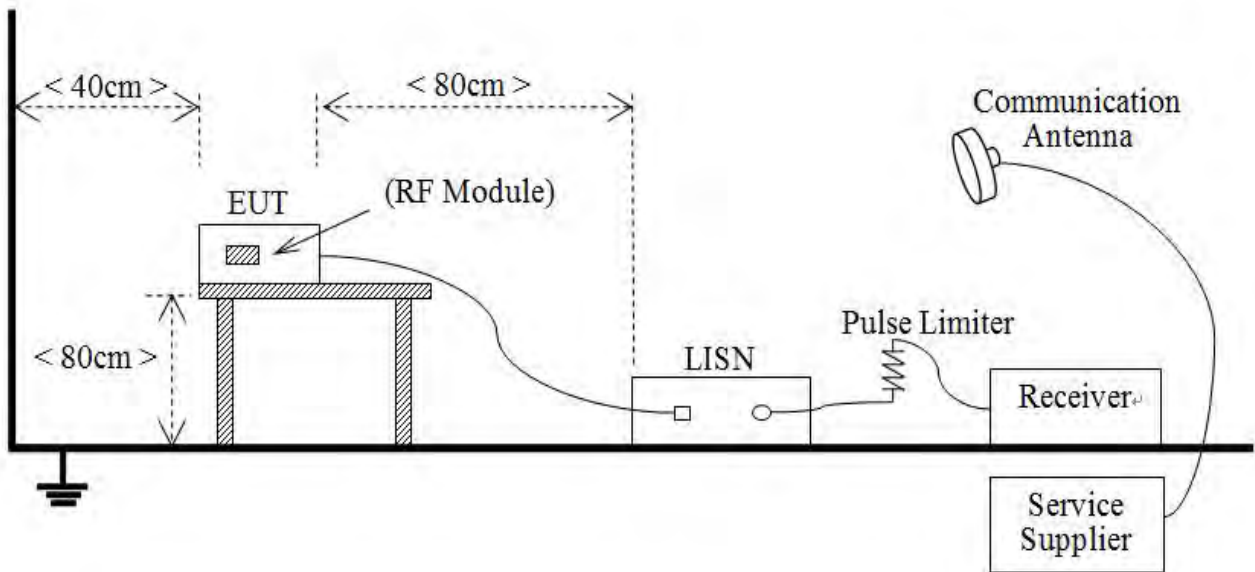


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

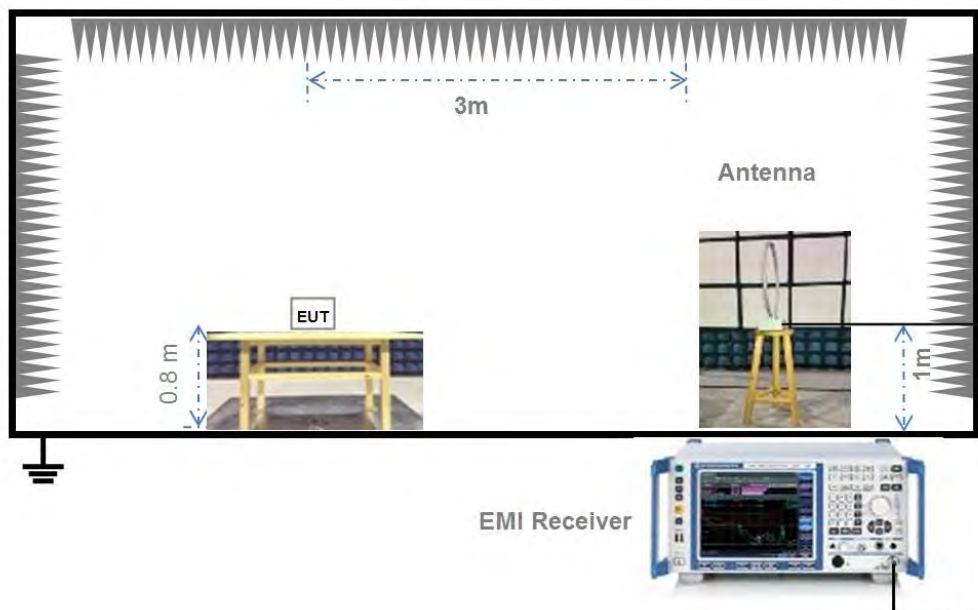


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

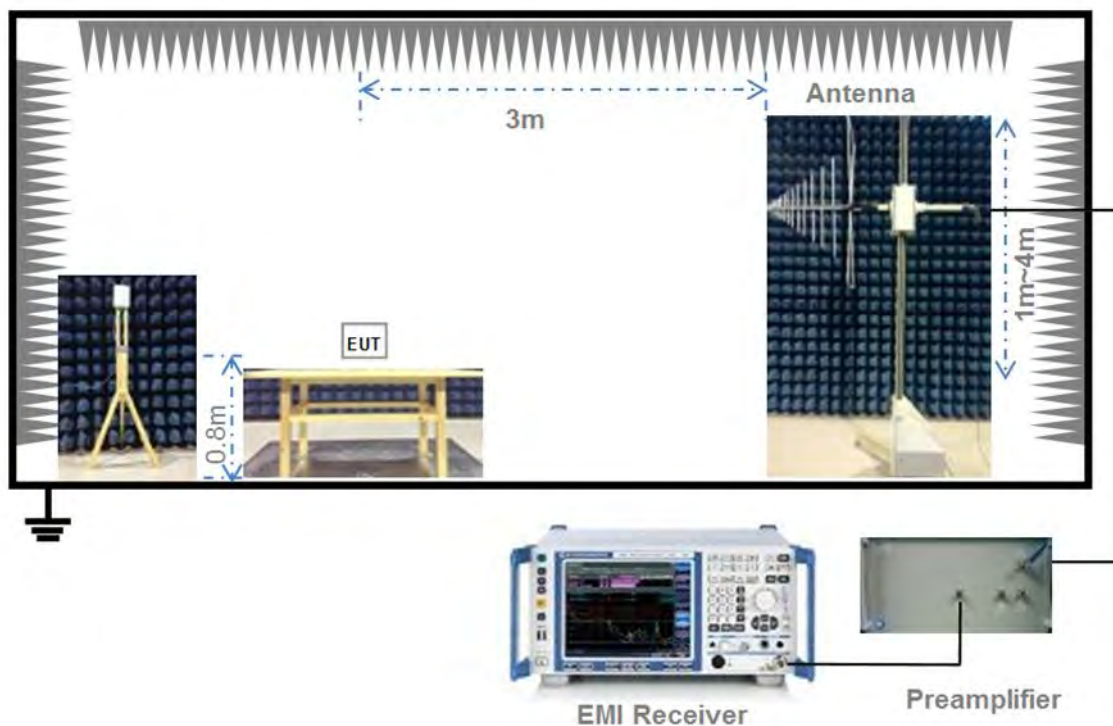

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

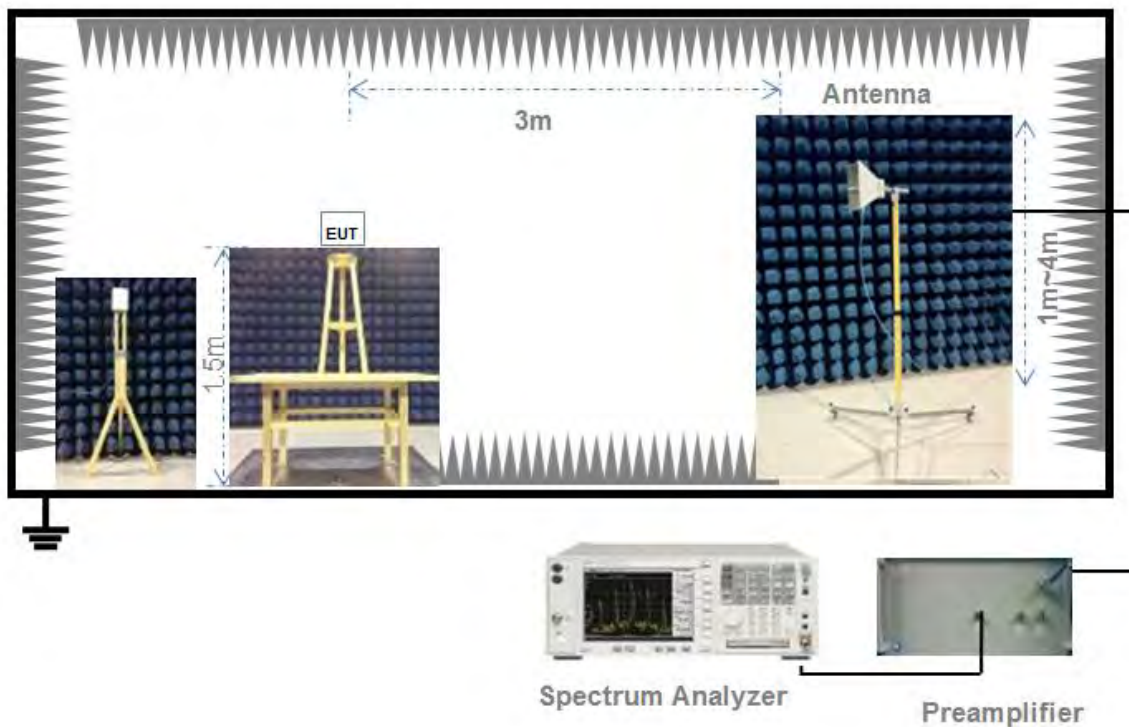

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 6.5 (c)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

RSS-247, 6.3.2

For DTS operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W, and the e.i.r.p. shall not exceed 4 W, except as provided in section 6.5 a) and b).

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

a) Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the RBW $\geq$ DTS bandwidth.

Set VBW $\geq 3 \times$ RBW.

Set span $\geq 3 \times$ RBW

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

b) Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value.

Set VBW $\geq$ RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a); RSS-247, 6.3.1(a); RSS-GEN, 6.7

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d); RSS-247, 6.6

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d); RSS-247, 6.6

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 6.6

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \times \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for

demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands:

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.

- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure:

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.

- b) VBW $\geq 3 \times$ RBW.

- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction:

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:

- 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
- 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
- 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain:

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test:

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the

Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.10; RSS-247, 6.6

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e); RSS-247, 6.3.1 (b)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

5.9.2 Test Setup

See section 4.5.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power, E.I.R.P

Left Ear

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK (BLE 1Mbps)		dBm	mW	
	dBm	mW			
Low Channel	7.25	5.31	30	1000	Pass
Middle Channel	7.03	5.04			Pass
High Channel	7.29	5.36			Pass

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK (BLE 2Mbps)		dBm	mW	
	dBm	mW			
Low Channel	7.66	5.83	30	1000	Pass
Middle Channel	7.40	5.49			Pass
High Channel	7.62	5.78			Pass

E.I.R.P Test Data (For ISSED)

Channel	E.I.R.P		Limit		Verdict
	GFSK (BLE 1Mbps)		dBm	mW	
	dBm	mW			
Low Channel	9.95	9.89	36	4000	Pass
Middle Channel	9.73	9.39			Pass
High Channel	9.99	9.98			Pass

Channel	E.I.R.P		Limit		Verdict
	GFSK (BLE 2Mbps)		dBm	mW	
	dBm	mW			
Low Channel	10.36	10.86	36	4000	Pass
Middle Channel	10.10	10.23			Pass
High Channel	10.32	10.75			Pass

Right EarPeak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK (BLE 1Mbps)		dBm	mW	
	dBm	mW			
Low Channel	8.72	7.44	30	1000	Pass
Middle Channel	8.78	7.56			Pass
High Channel	9.31	8.52			Pass

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK (BLE 2Mbps)		dBm	mW	
	dBm	mW			
Low Channel	8.77	7.53	30	1000	Pass
Middle Channel	8.89	7.74			Pass
High Channel	9.38	8.66			Pass

E.I.R.P Test Data (For ISSED)

Channel	E.I.R.P		Limit		Verdict
	GFSK (BLE 1Mbps)		dBm	mW	
	dBm	mW			
Low Channel	11.42	13.85	36	4000	Pass
Middle Channel	11.48	14.07			Pass
High Channel	12.01	15.87			Pass

Channel	E.I.R.P		Limit		Verdict
	GFSK (BLE 2Mbps)		dBm	mW	
	dBm	mW			
Low Channel	11.47	14.03	36	4000	Pass
Middle Channel	11.59	14.42			Pass
High Channel	12.08	16.13			Pass

Test Plots

Left Ear

GFSK (BLE 1Mbps) LOW CHANNEL




GFSK (BLE 1Mbps) MIDDLE CHANNEL



GFSK (BLE 1Mbps) HIGH CHANNEL



GFSK (BLE 2Mbps) LOW CHANNEL

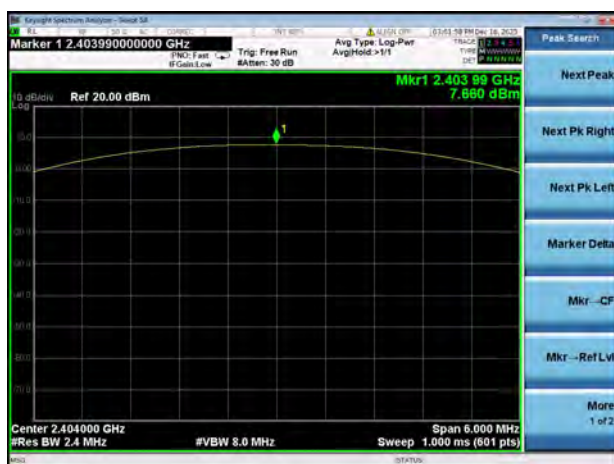

GFSK (BLE 2Mbps) MIDDLE CHANNEL



[illegible]

Marker 1 2.401900000000 GHz

Ref 20.00 dBm

Center 2.402000 GHz

Span 3.000 MHz

#VBW 3.0 MHz

Sweep 1.000 ms (601 pts)

10 dBm

Log

8.715 dBm

Mkr1 2.401 900 GHz

Keysight Spectra Analyzer - Setup - 2024

Marker 1 2.440110000000 GHz

Comp: 1 20.00 dBm

Trig: Free Run

Avg Type: Log-Pwr

Avg Hold: 1/1

11.6799 GHz Jan 16, 2023

Trace 1 2.440110 GHz

Trace 2 2.440110 GHz

Trace 3 2.440110 GHz

Trace 4 2.440110 GHz

Trace 5 2.440110 GHz

Trace 6 2.440110 GHz

Trace 7 2.440110 GHz

Trace 8 2.440110 GHz

Trace 9 2.440110 GHz

Trace 10 2.440110 GHz

Trace 11 2.440110 GHz

Trace 12 2.440110 GHz

Trace 13 2.440110 GHz

Trace 14 2.440110 GHz

Trace 15 2.440110 GHz

Trace 16 2.440110 GHz

Trace 17 2.440110 GHz

Trace 18 2.440110 GHz

Trace 19 2.440110 GHz

Trace 20 2.440110 GHz

Trace 21 2.440110 GHz

Trace 22 2.440110 GHz

Trace 23 2.440110 GHz

Trace 24 2.440110 GHz

Trace 25 2.440110 GHz

Trace 26 2.440110 GHz

Trace 27 2.440110 GHz

Trace 28 2.440110 GHz

Trace 29 2.440110 GHz

Trace 30 2.440110 GHz

Trace 31 2.440110 GHz

Trace 32 2.440110 GHz

Trace 33 2.440110 GHz

Trace 34 2.440110 GHz

Trace 35 2.440110 GHz

Trace 36 2.440110 GHz

Trace 37 2.440110 GHz

Trace 38 2.440110 GHz

Trace 39 2.440110 GHz

Trace 40 2.440110 GHz

Trace 41 2.440110 GHz

Trace 42 2.440110 GHz

Trace 43 2.440110 GHz

Trace 44 2.440110 GHz

Trace 45 2.440110 GHz

Trace 46 2.440110 GHz

Trace 47 2.440110 GHz

Trace 48 2.440110 GHz

Trace 49 2.440110 GHz

Trace 50 2.440110 GHz

Trace 51 2.440110 GHz

Trace 52 2.440110 GHz

Trace 53 2.440110 GHz

Trace 54 2.440110 GHz

Trace 55 2.440110 GHz

Trace 56 2.440110 GHz

Trace 57 2.440110 GHz

Trace 58 2.440110 GHz

Trace 59 2.440110 GHz

Trace 60 2.440110 GHz

Trace 61 2.440110 GHz

Trace 62 2.440110 GHz

Trace 63 2.440110 GHz

Trace 64 2.440110 GHz

Trace 65 2.440110 GHz

Trace 66 2.440110 GHz

Trace 67 2.440110 GHz

Trace 68 2.440110 GHz

Trace 69 2.440110 GHz

Trace 70 2.440110 GHz

Trace 71 2.440110 GHz

Trace 72 2.440110 GHz

Trace 73 2.440110 GHz

Trace 74 2.440110 GHz

Trace 75 2.440110 GHz

Trace 76 2.440110 GHz

Trace 77 2.440110 GHz

Trace 78 2.440110 GHz

Trace 79 2.440110 GHz

Trace 80 2.440110 GHz

Trace 81 2.440110 GHz

Trace 82 2.440110 GHz

Trace 83 2.440110 GHz

Trace 84 2.440110 GHz

Trace 85 2.440110 GHz

Trace 86 2.440110 GHz

Trace 87 2.440110 GHz

Trace 88 2.440110 GHz

Trace 89 2.440110 GHz

Trace 90 2.440110 GHz

Trace 91 2.440110 GHz

Trace 92 2.440110 GHz

Trace 93 2.440110 GHz

Trace 94 2.440110 GHz

Trace 95 2.440110 GHz

Trace 96 2.440110 GHz

Trace 97 2.440110 GHz

Trace 98 2.440110 GHz

Trace 99 2.440110 GHz

Trace 100 2.440110 GHz

Trace 101 2.440110 GHz

Trace 102 2.440110 GHz

Trace 103 2.440110 GHz

Trace 104 2.440110 GHz

Trace 105 2.440110 GHz

Trace 106 2.440110 GHz

Trace 107 2.440110 GHz

Trace 108 2.440110 GHz

Trace 109 2.440110 GHz

Trace 110 2.440110 GHz

Trace 111 2.440110 GHz

Trace 112 2.440110 GHz

Trace 113 2.440110 GHz

Trace 114 2.440110 GHz

Trace 115 2.440110 GHz

Trace 116 2.440110 GHz

Trace 117 2.440110 GHz

Trace 118 2.440110 GHz

Trace 119 2.440110 GHz

Trace 120 2.440110 GHz

Trace 121 2.440110 GHz

Trace 122 2.440110 GHz

Trace 123 2.440110 GHz

Trace 124 2.440110 GHz

Trace 125 2.440110 GHz

Trace 126 2.440110 GHz

Trace 127 2.440110 GHz

Trace 128 2.440110 GHz

Trace 129 2.440110 GHz

Trace 130 2.440110 GHz

Trace 131 2.440110 GHz

Trace 132 2.440110 GHz

Trace 133 2.440110 GHz

Trace 134 2.440110 GHz

Trace 135 2.440110 GHz

Trace 136 2.440110 GHz

Trace 137 2.440110 GHz

Trace 138 2.440110 GHz

Trace 139 2.440110 GHz

Trace 140 2.440110 GHz

Trace 141 2.440110 GHz

Trace 142 2.440110 GHz

Trace 143 2.440110 GHz

Trace 144 2.440110 GHz

Trace 145 2.440110 GHz

Trace 146 2.440110 GHz

Trace 147 2.440110 GHz

Trace 148 2.440110 GHz

Trace 149 2.440110 GHz

Trace 150 2.440110 GHz

Trace 151 2.440110 GHz

Trace 152 2.440110 GHz

Trace 153 2.440110 GHz

Trace 154 2.440110 GHz

Trace 155 2.440110 GHz

Trace 156 2.440110 GHz

Trace 157 2.440110 GHz

Trace 158 2.440110 GHz

Trace 159 2.440110 GHz

Trace 160 2.440110 GHz

Trace 161 2.440110 GHz

Trace 162 2.440110 GHz

Trace 163 2.440110 GHz

Trace 164 2.440110 GHz

Trace 165 2.440110 GHz

Trace 166 2.440110 GHz

Trace 167 2.440110 GHz

Trace 168 2.440110 GHz

Trace 169 2.440110 GHz

Trace 170 2.440110 GHz

Trace 171 2.440110 GHz

Trace 172 2.440110 GHz

Trace 173 2.440110 GHz

Trace 174 2.440110 GHz

Trace 175 2.440110 GHz

Trace 176 2.440110 GHz

Trace 177 2.440110 GHz

Trace 178 2.440110 GHz

Trace 179 2.440110 GHz

Trace 180 2.440110 GHz

Trace 181 2.440110 GHz

Trace 182 2.440110 GHz

Trace 183 2.440110 GHz

Trace 184 2.440110 GHz

Trace 185 2.440110 GHz

Trace 186 2.440110 GHz

Trace 187 2.440110 GHz

Trace 188 2.440110 GHz

Trace 189 2.440110 GHz

Trace

Marker 1 2.479865000000 GHz

Ref 20.00 dBm

Mkr1 2.479 865 GHz
9.305 dBm

Center 2.480000 GHz
#Res BW 1.0 MHz
#VBW 3.0 MHz

Sweep 1.000 ms (601 pts)

Span 3.000 MHz

1 of 2

GFSK (BLE 2Mbps) LOW CHANNEL



GFSK (BLE 2Mbps) MIDDLE CHANNEL



GFSK (BLE 2Mbps) HIGH CHANNEL



A.2 Occupied Bandwidth

Test Data

Left Ear

Test Mode	GFSK (BLE 1Mbps)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	675.000	1076.400	≥500
Middle Channel	675.000	1067.400	≥500
High Channel	675.000	1070.600	≥500

Test Mode	GFSK (BLE 2Mbps)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	800.000	2017.700	≥500
Middle Channel	800.000	2041.300	≥500
High Channel	800.000	2053.400	≥500

Right Ear

Test Mode	GFSK (BLE 1Mbps)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	650.000	1056.100	≥500
Middle Channel	660.000	1056.400	≥500
High Channel	660.000	1053.700	≥500

Test Mode	GFSK (BLE 2Mbps)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	810.000	2020.300	≥500
Middle Channel	810.000	2058.700	≥500
High Channel	810.000	2018.900	≥500

Test Plots

Left Ear

6 dB Bandwidth

GFSK (BLE 1Mbps) LOW CHANNEL



GFSK (BLE 1Mbps) MIDDLE CHANNEL



GFSK (BLE 1Mbps) HIGH CHANNEL



GFSK (BLE 2Mbps) LOW CHANNEL



GFSK (BLE 2Mbps) MIDDLE CHANNEL



GFSK (BLE 2Mbps) HIGH CHANNEL



99% Bandwidth

GFSK (BLE 1Mbps) LOW CHANNEL



GFSK (BLE 1Mbps) MIDDLE CHANNEL



GFSK (BLE 1Mbps) HIGH CHANNEL



GFSK (BLE 2Mbps) LOW CHANNEL



GFSK (BLE 2Mbps) MIDDLE CHANNEL



GFSK (BLE 2Mbps) HIGH CHANNEL



Right Ear

6 dB Bandwidth

GFSK (BLE 1Mbps) LOW CHANNEL



GFSK (BLE 1Mbps) MIDDLE CHANNEL



GFSK (BLE 1Mbps) HIGH CHANNEL



GFSK (BLE 2Mbps) LOW CHANNEL



GFSK (BLE 2Mbps) MIDDLE CHANNEL



GFSK (BLE 2Mbps) HIGH CHANNEL



99% Bandwidth

GFSK (BLE 1Mbps) LOW CHANNEL



GFSK (BLE 1Mbps) MIDDLE CHANNEL



GFSK (BLE 1Mbps) HIGH CHANNEL



GFSK (BLE 2Mbps) LOW CHANNEL



GFSK (BLE 2Mbps) MIDDLE CHANNEL



GFSK (BLE 2Mbps) HIGH CHANNEL



A.3 Conducted Spurious Emissions

Test Data

Left Ear

GFSK (BLE 1Mbps)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-36.05	6.94	-13.07	Pass
Middle Channel	-35.59	6.66	-13.34	Pass
High Channel	-38.39	6.96	-13.04	Pass

GFSK (BLE 2Mbps)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-37.94	6.96	-13.04	Pass
Middle Channel	-36.69	6.69	-13.31	Pass
High Channel	-39.64	6.76	-13.24	Pass

Right Ear


GFSK (BLE 1Mbps)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-35.34	8.43	-11.57	Pass
Middle Channel	-34.18	8.52	-11.48	Pass
High Channel	-33.12	9.07	-10.93	Pass

GFSK (BLE 2Mbps)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-37.92	8.13	-11.87	Pass
Middle Channel	-35.70	8.21	-11.80	Pass
High Channel	-33.69	8.76	-11.25	Pass


Test Plots

Left Ear


GFSK (BLE 1Mbps) LOW CHANNEL,
CARRIER LEVEL

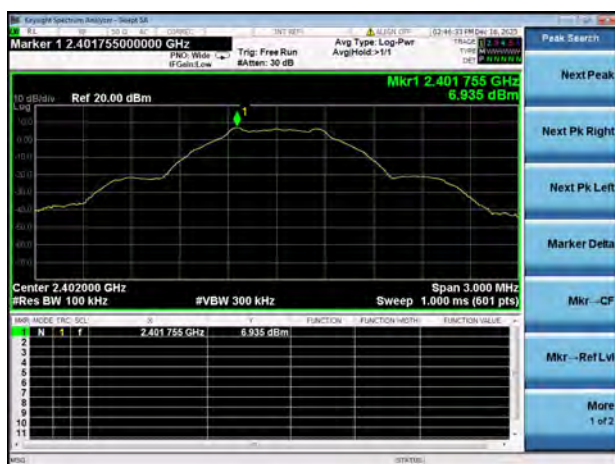

GFSK (BLE 1Mbps) LOW CHANNEL,
SPURIOUS 30 MHz ~ 3 GHz


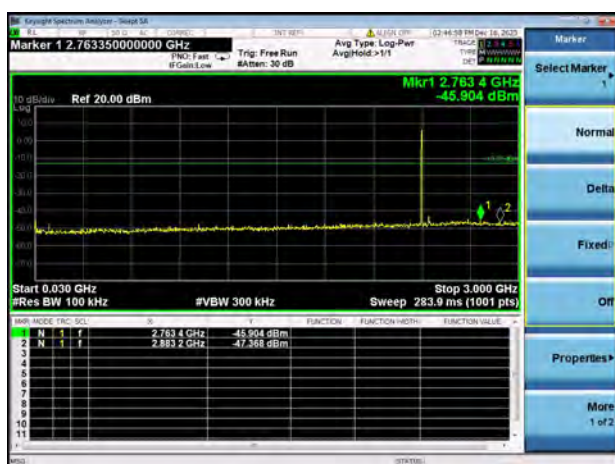


GFSK (BLE 1Mbps) LOW CHANNEL,
SPURIOUS 2 GHz ~ 25 GHz

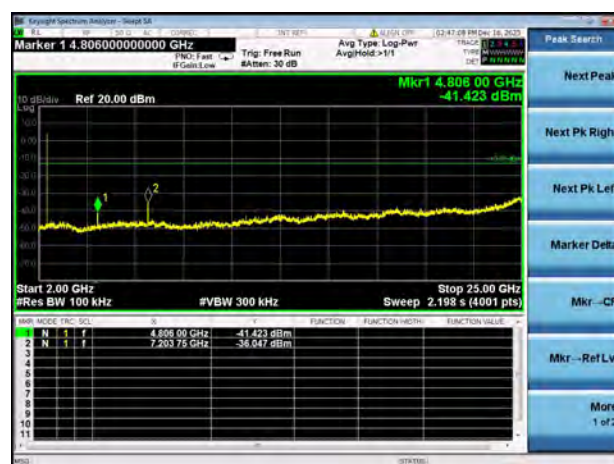

GFSK (BLE 1Mbps) MIDDLE CHANNEL, CARRIER LEVEL

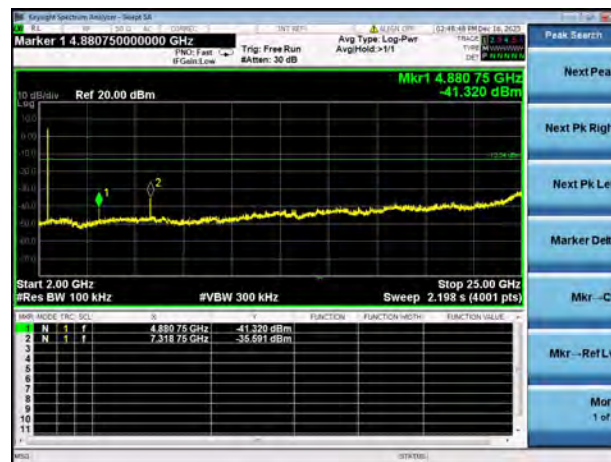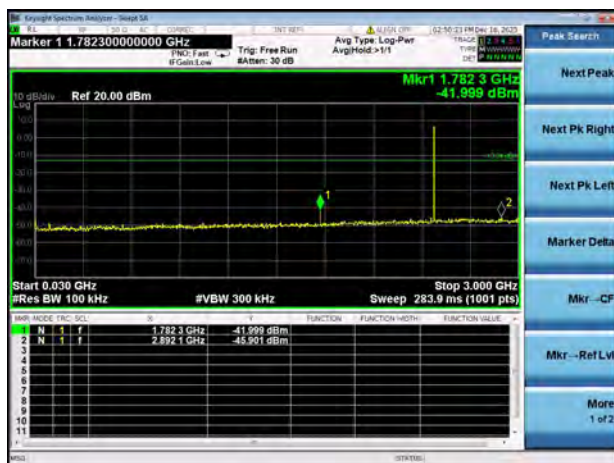

GFSK (BLE 1Mbps) MIDDLE CHANNEL,
SPURIOUS 30 MHz ~ 3 GHzGFSK (BLE 1Mbps) MIDDLE CHANNEL,
SPURIOUS 2 GHz ~ 25 GHzGFSK (BLE 1Mbps) HIGH CHANNEL,
CARRIER LEVELGFSK (BLE 1Mbps) HIGH CHANNEL,
SPURIOUS 30 MHz ~ 3 GHzGFSK (BLE 1Mbps) HIGH CHANNEL,
SPURIOUS 2 GHz ~ 25 GHz


GFSK (BLE 2Mbps) LOW CHANNEL, CARRIER LEVEL



GFSK (BLE 2Mbps) LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz







GFSK (BLE 2Mbps) LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

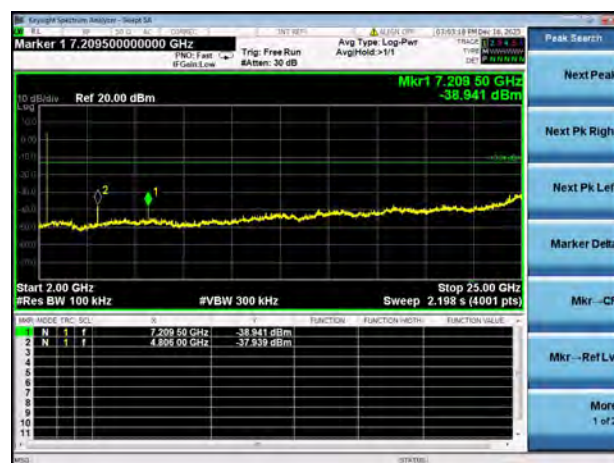


GFSK (BLE 2Mbps) MIDDLE CHANNEL, CARRIER LEVEL

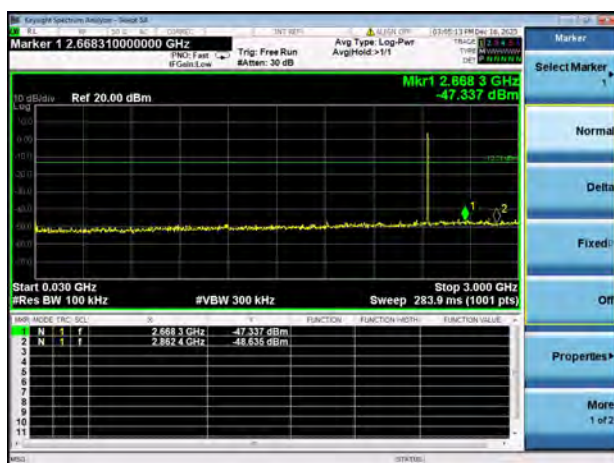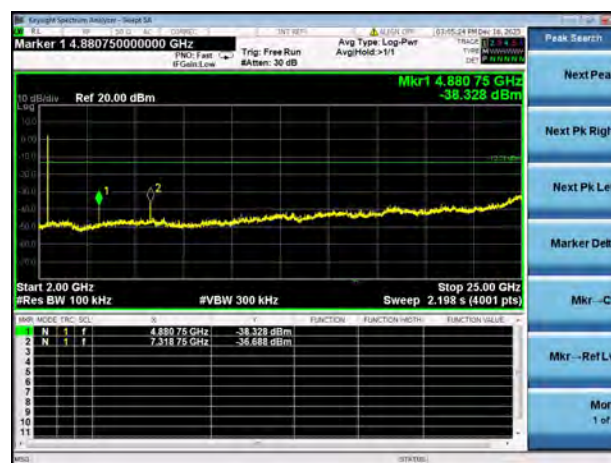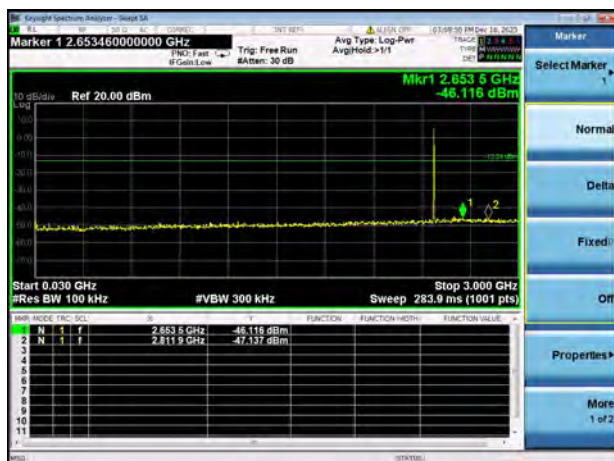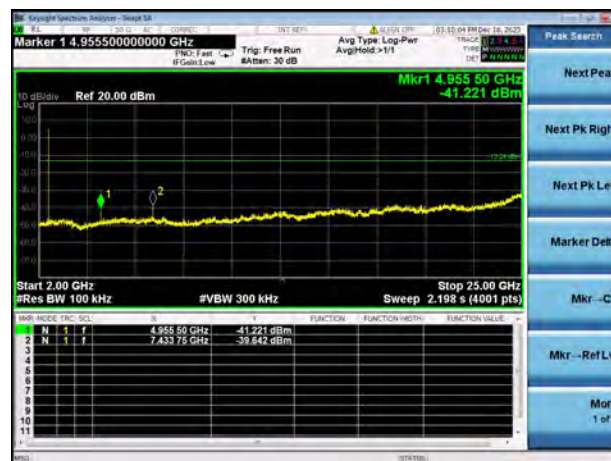


GFSK (BLE 2Mbps) MIDDLE CHANNEL,
SPURIOUS 30 MHz ~ 3 GHzGFSK (BLE 2Mbps) MIDDLE CHANNEL,
SPURIOUS 2 GHz ~ 25 GHzGFSK (BLE 2Mbps) HIGH CHANNEL,
CARRIER LEVELGFSK (BLE 2Mbps) HIGH CHANNEL,
SPURIOUS 30 MHz ~ 3 GHzGFSK (BLE 2Mbps) HIGH CHANNEL,
SPURIOUS 2 GHz ~ 25 GHz

Right Ear


GFSK (BLE 1Mbps) LOW CHANNEL,
CARRIER LEVEL

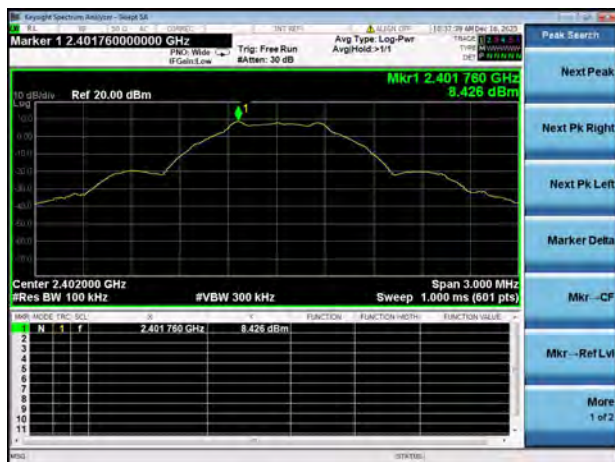


GFSK (BLE 1Mbps) LOW CHANNEL,
SPURIOUS 30 MHz ~ 3 GHz





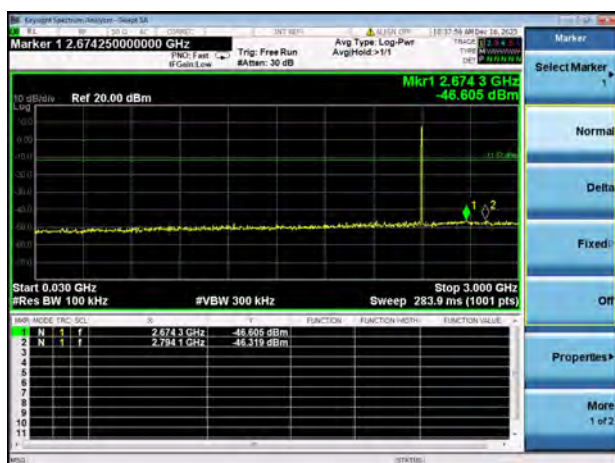


GFSK (BLE 1Mbps) LOW CHANNEL,
SPURIOUS 2 GHz ~ 25 GHz

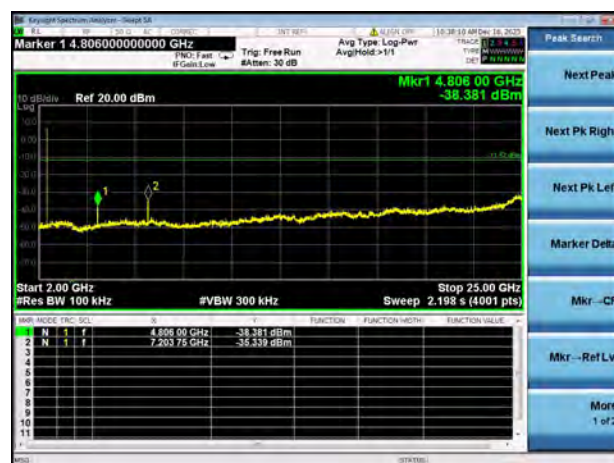

GFSK (BLE 1Mbps) MIDDLE CHANNEL, CARRIER LEVEL

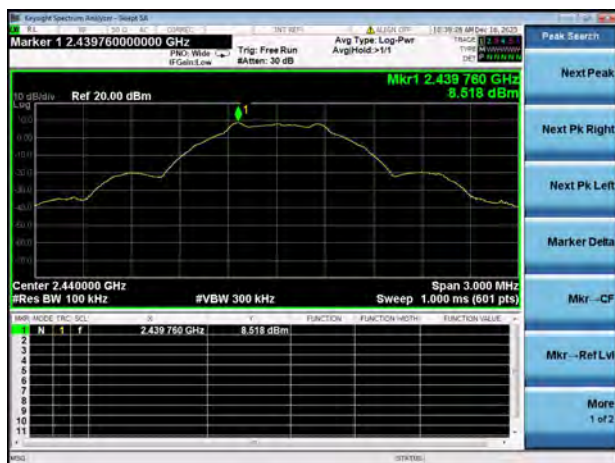


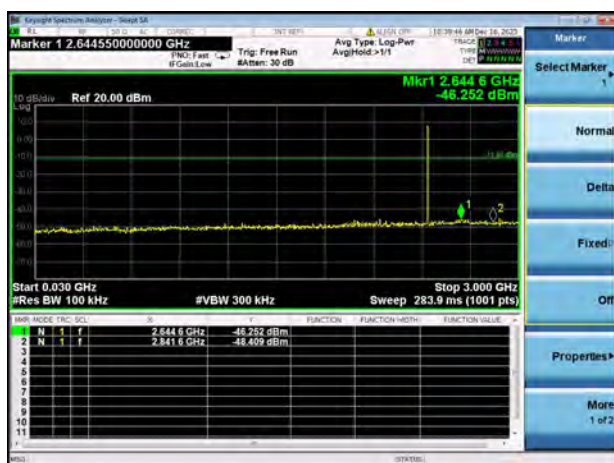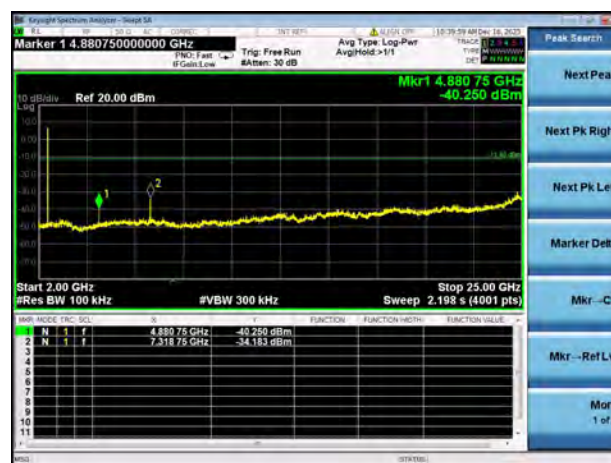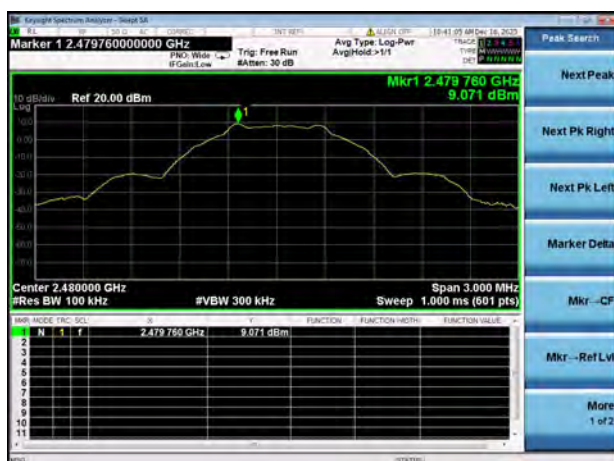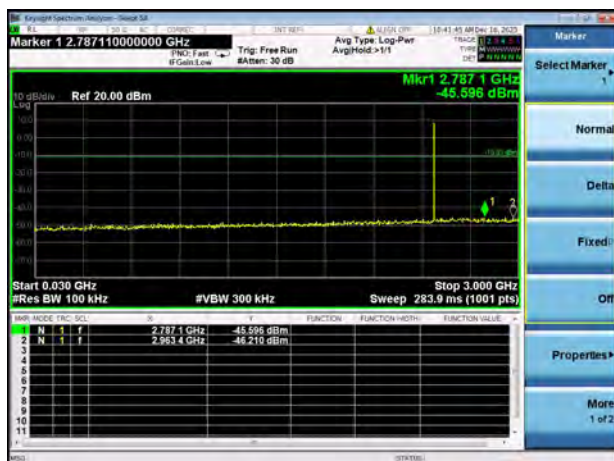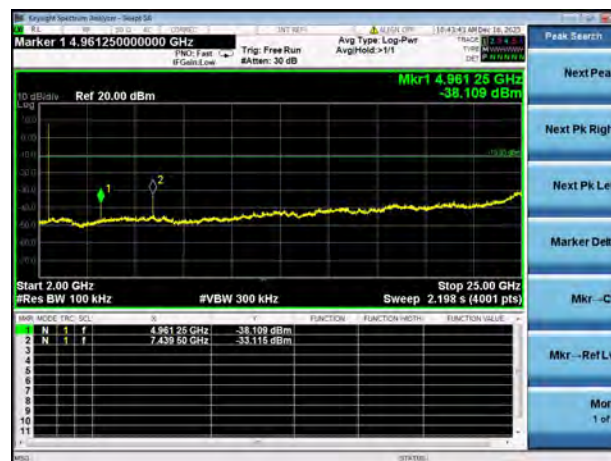GFSK (BLE 1Mbps) MIDDLE CHANNEL,
SPURIOUS 30 MHz ~ 3 GHzGFSK (BLE 1Mbps) MIDDLE CHANNEL,
SPURIOUS 2 GHz ~ 25 GHzGFSK (BLE 1Mbps) HIGH CHANNEL,
CARRIER LEVELGFSK (BLE 1Mbps) HIGH CHANNEL,
SPURIOUS 30 MHz ~ 3 GHzGFSK (BLE 1Mbps) HIGH CHANNEL,
SPURIOUS 2 GHz ~ 25 GHz


GFSK (BLE 2Mbps) LOW CHANNEL, CARRIER LEVEL



GFSK (BLE 2Mbps) LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz




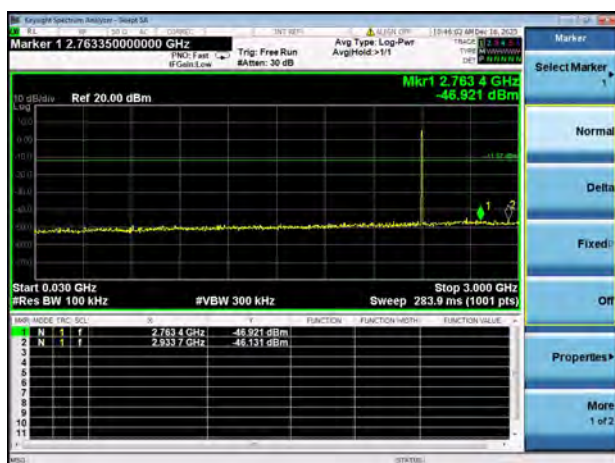


GFSK (BLE 2Mbps) LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

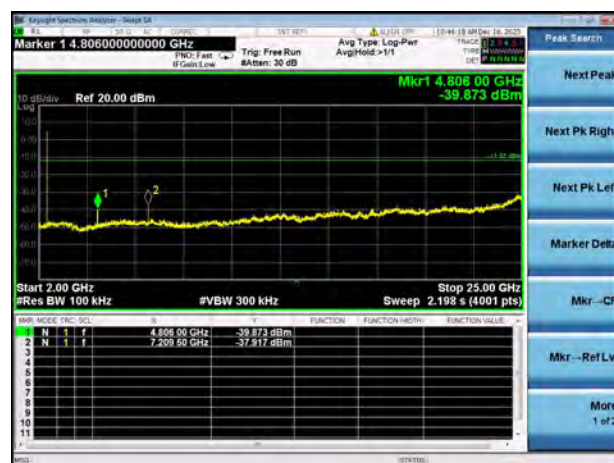

GFSK (BLE 2Mbps) MIDDLE CHANNEL, CARRIER LEVEL

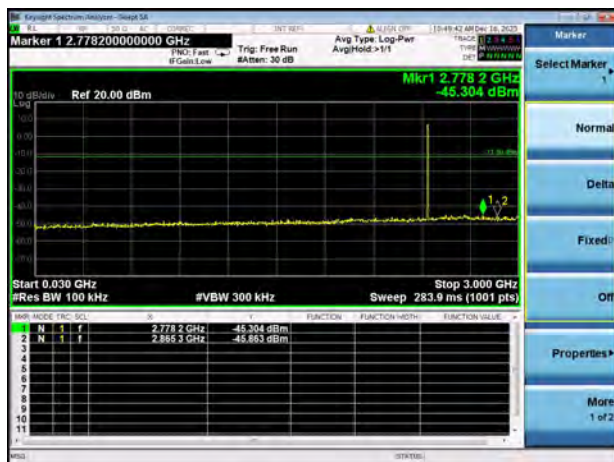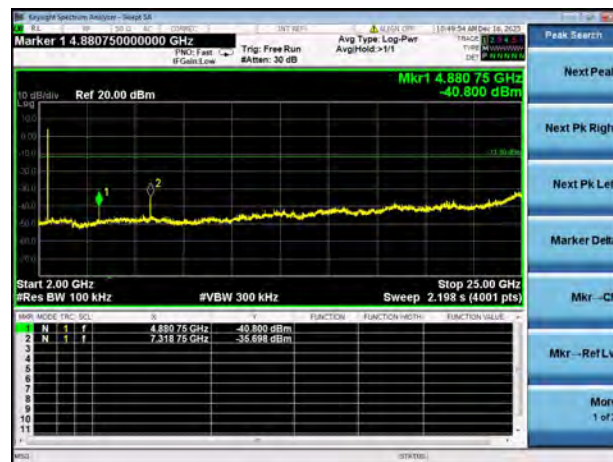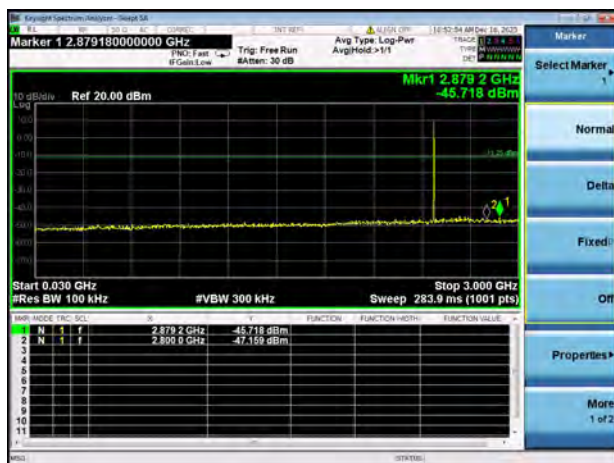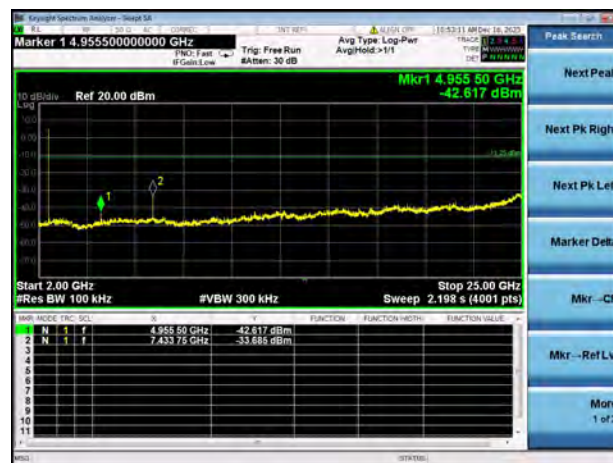

GFSK (BLE 2Mbps) MIDDLE CHANNEL,
SPURIOUS 30 MHz ~ 3 GHzGFSK (BLE 2Mbps) MIDDLE CHANNEL,
SPURIOUS 2 GHz ~ 25 GHzGFSK (BLE 2Mbps) HIGH CHANNEL,
CARRIER LEVELGFSK (BLE 2Mbps) HIGH CHANNEL,
SPURIOUS 30 MHz ~ 3 GHzGFSK (BLE 2Mbps) HIGH CHANNEL,
SPURIOUS 2 GHz ~ 25 GHz

A.4 Band Edge (Authorized-band band-edge)

Note: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Test Data

Left Ear

GFSK (BLE 1Mbps)				
Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-46.55	6.94	-13.07	Pass
High Channel	-46.79	6.96	-13.04	Pass

GFSK (BLE 2Mbps)				
Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-45.52	6.96	-13.04	Pass
High Channel	-46.59	6.76	-13.24	Pass

Right Ear


GFSK (BLE 1Mbps)				
Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-45.04	8.43	-11.57	Pass
High Channel	-46.73	9.07	-10.93	Pass

GFSK (BLE 2Mbps)				
Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-45.50	8.13	-11.87	Pass
High Channel	-47.52	8.76	-11.25	Pass


Test Plots

Left Ear


GFSK (BLE 1Mbps) LOW CHANNEL, CARRIER LEVEL

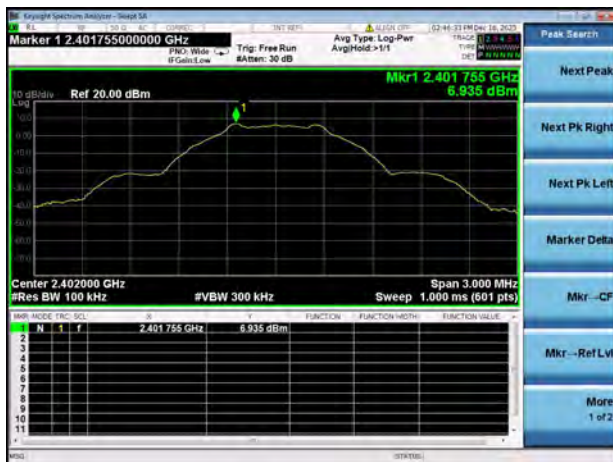


GFSK (BLE 1Mbps) LOW CHANNEL, BAND EDGE

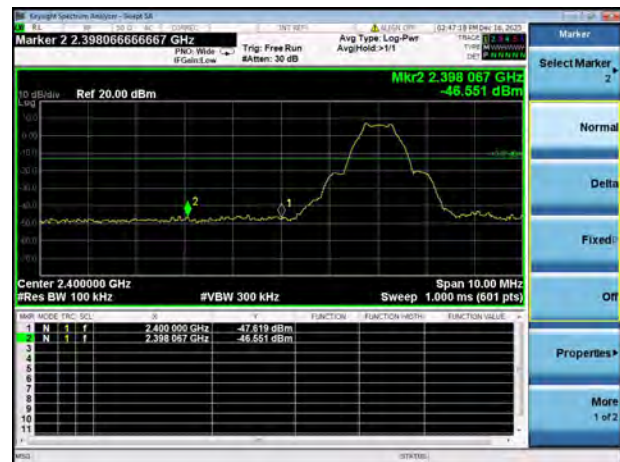

GFSK (BLE 1Mbps) HIGH CHANNEL, CARRIER LEVEL

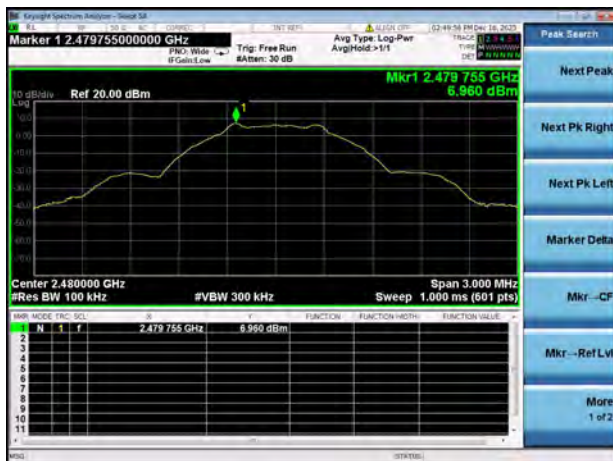


GFSK (BLE 1Mbps) HIGH CHANNEL, BAND EDGE

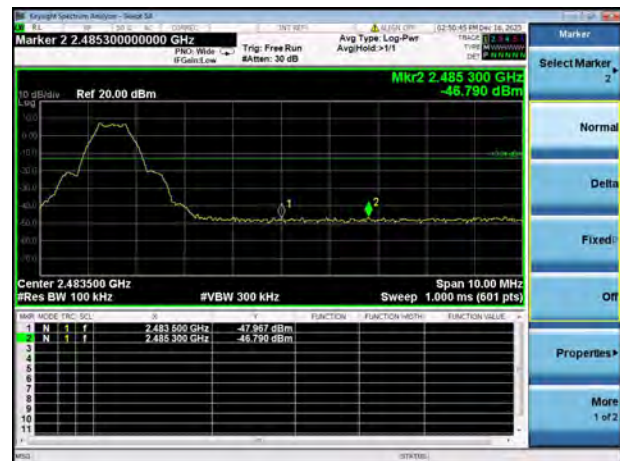


GFSK (BLE 2Mbps) LOW CHANNEL, CARRIER LEVEL




GFSK (BLE 2Mbps) LOW CHANNEL, BAND EDGE

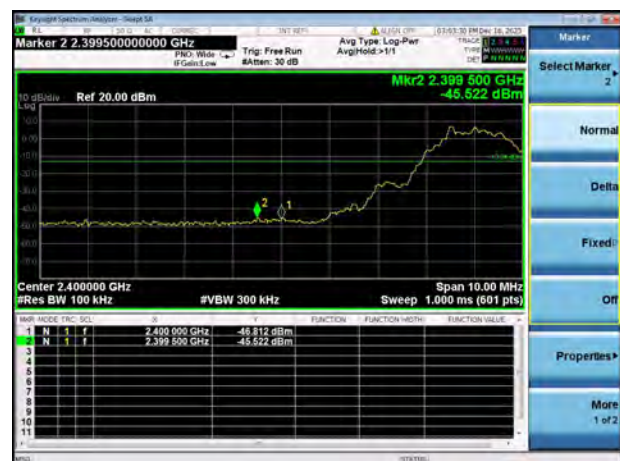

GFSK (BLE 2Mbps) HIGH CHANNEL, CARRIER LEVEL

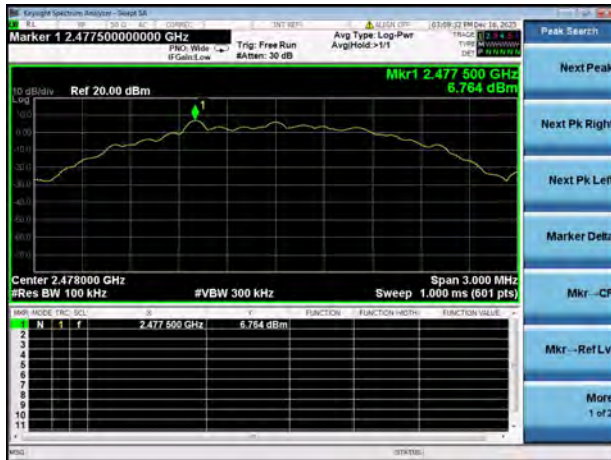


GFSK (BLE 2Mbps) HIGH CHANNEL, BAND EDGE

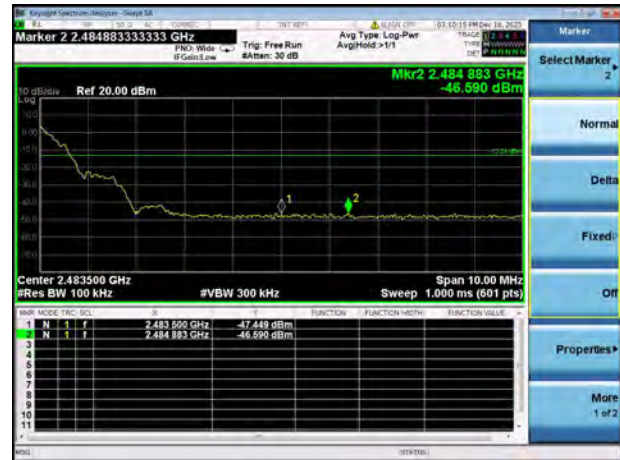


Right Ear


GFSK (BLE 1Mbps) LOW CHANNEL, CARRIER LEVEL

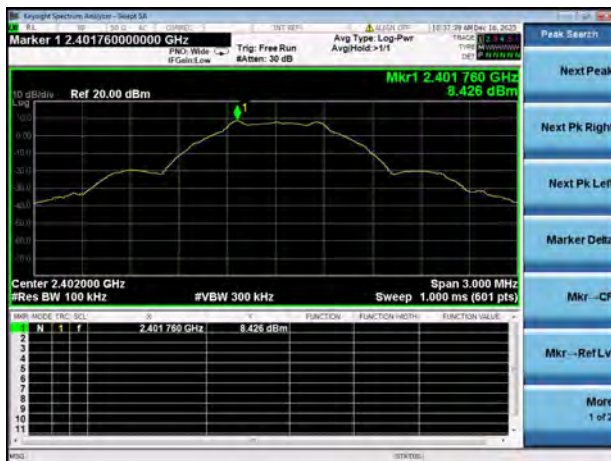


GFSK (BLE 1Mbps) LOW CHANNEL, BAND EDGE

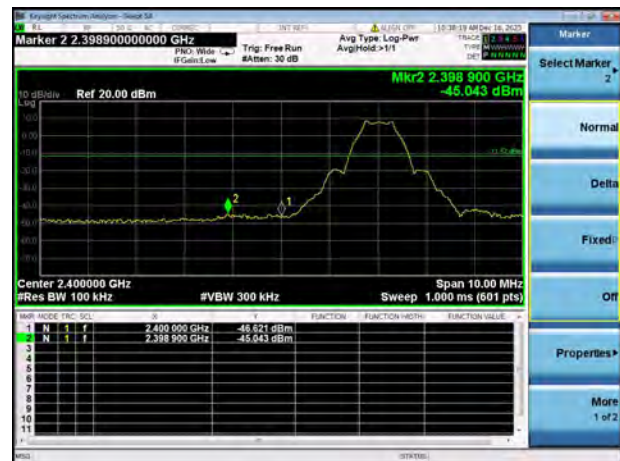

GFSK (BLE 1Mbps) HIGH CHANNEL, CARRIER LEVEL

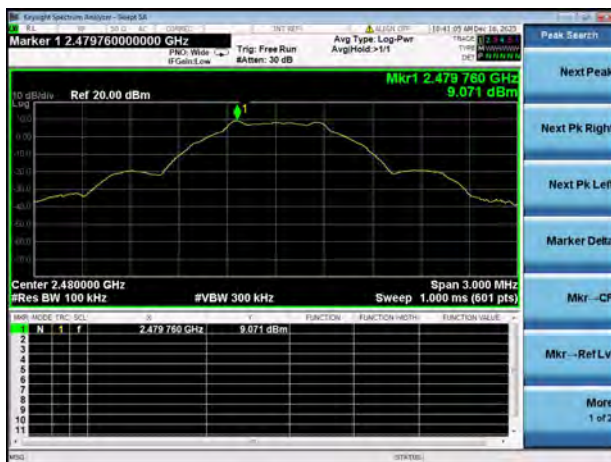

GFSK (BLE 1Mbps) HIGH CHANNEL, BAND EDGE

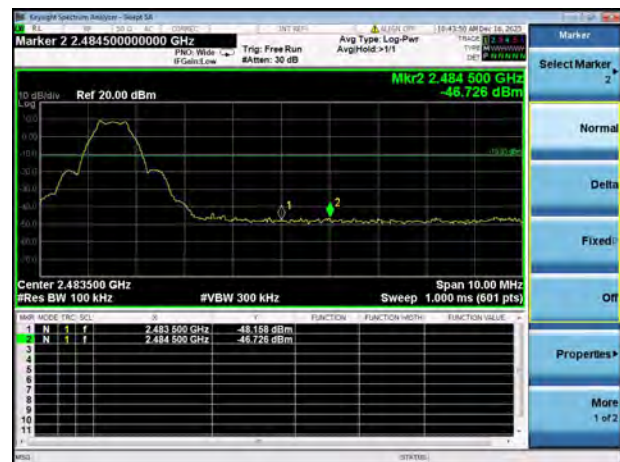

GFSK (BLE 2Mbps) LOW CHANNEL, CARRIER LEVEL



GFSK (BLE 2Mbps) LOW CHANNEL, BAND EDGE



GFSK (BLE 2Mbps) HIGH CHANNEL, CARRIER LEVEL



GFSK (BLE 2Mbps) HIGH CHANNEL, BAND EDGE



A.5 Conducted Emissions

Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

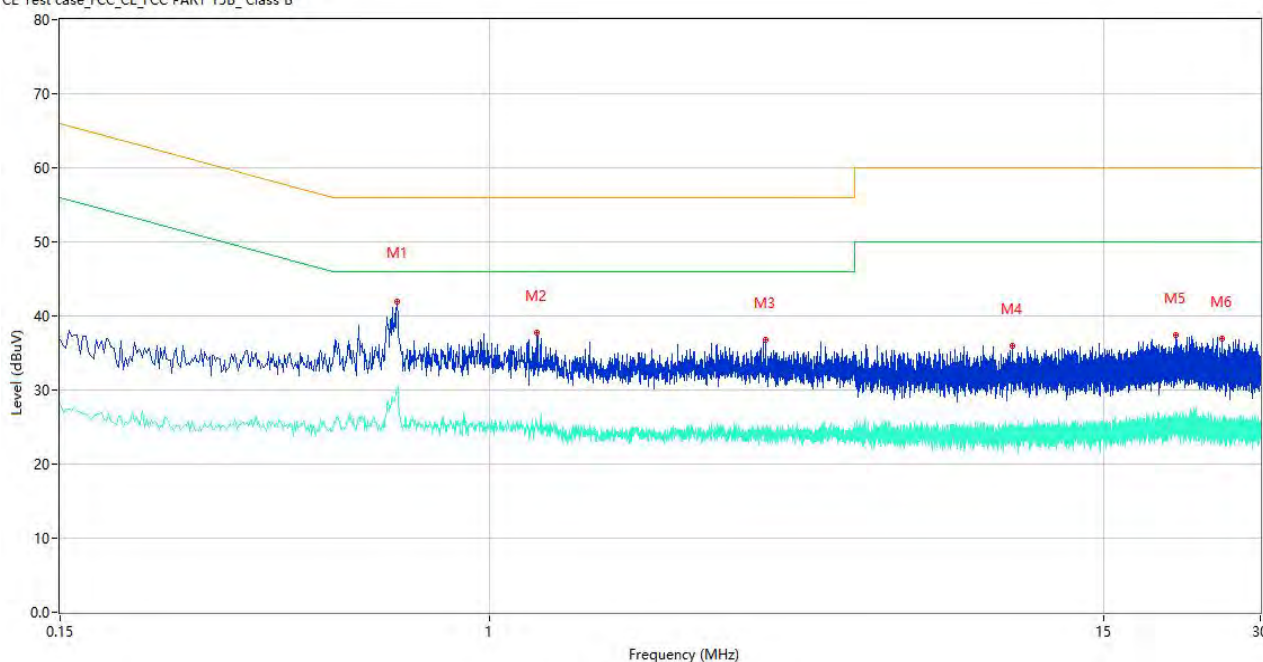

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.664	41.98	10.39	56.00	14.02	Peak	L	Pass
1**	0.664	30.35	10.39	46.00	15.65	AV	L	Pass
2	1.228	37.73	10.27	56.00	18.27	Peak	L	Pass
2**	1.228	24.81	10.27	46.00	21.19	AV	L	Pass
3	3.380	36.83	10.33	56.00	19.17	Peak	L	Pass
3**	3.380	24.28	10.33	46.00	21.72	AV	L	Pass
4	10.052	35.97	10.62	60.00	24.03	Peak	L	Pass
4**	10.052	24.71	10.62	50.00	25.29	AV	L	Pass
5	20.682	37.34	11.07	60.00	22.66	Peak	L	Pass
5**	20.682	26.74	11.07	50.00	23.26	AV	L	Pass
6	25.392	36.86	11.06	60.00	23.14	Peak	L	Pass
6**	25.392	25.09	11.06	50.00	24.91	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

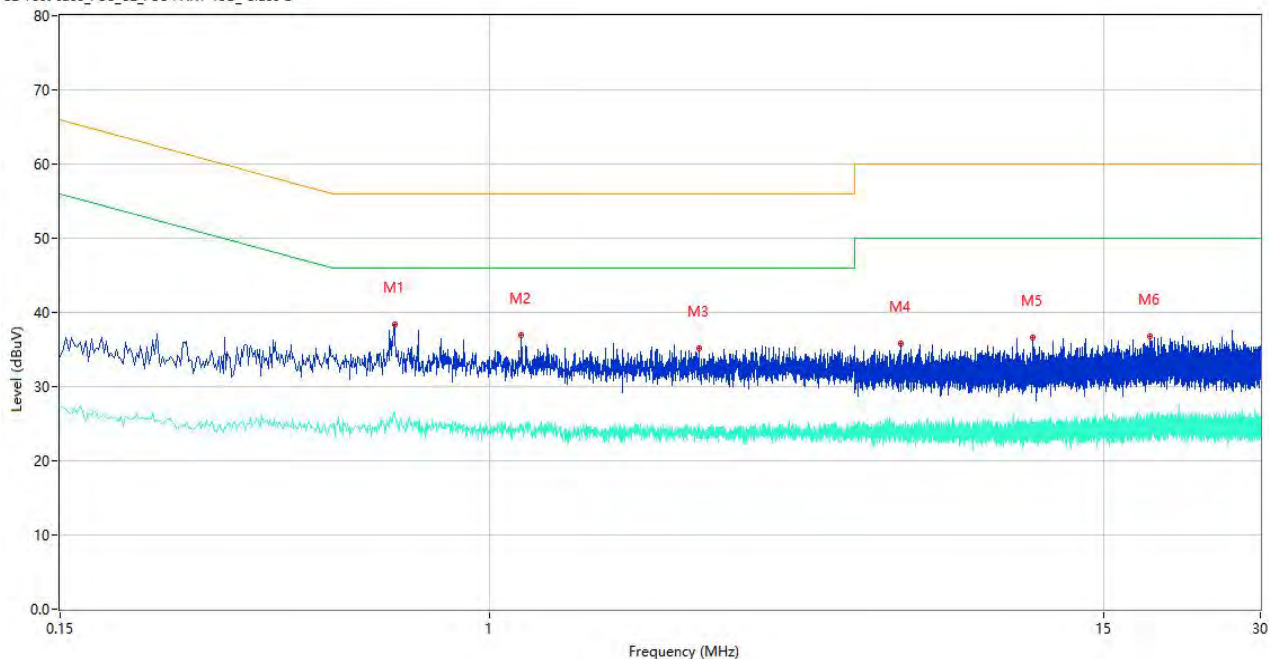

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.656	38.33	10.32	56.00	17.67	Peak	N	Pass
1**	0.656	26.49	10.32	46.00	19.51	AV	N	Pass
2	1.150	36.86	10.45	56.00	19.14	Peak	N	Pass
2**	1.150	24.77	10.45	46.00	21.23	AV	N	Pass
3	2.518	35.09	10.19	56.00	20.91	Peak	N	Pass
3**	2.518	24.77	10.19	46.00	21.23	AV	N	Pass
4	6.126	35.82	10.36	60.00	24.18	Peak	N	Pass
4**	6.126	23.98	10.36	50.00	26.02	AV	N	Pass
5	10.976	36.54	10.75	60.00	23.46	Peak	N	Pass
5**	10.976	24.74	10.75	50.00	25.26	AV	N	Pass
6	18.398	36.71	11.13	60.00	23.29	Peak	N	Pass
6**	18.398	25.48	11.13	50.00	24.52	AV	N	Pass

A.6 Radiated Spurious Emission

Note¹: The symbol of "--" in the table which means not application.

Note²: For the test data above 1 GHz, according the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and BLE 2-Low mode is the worst.

Note⁵: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

Test Data and Plots


30 MHz to 1 GHz, ANT H

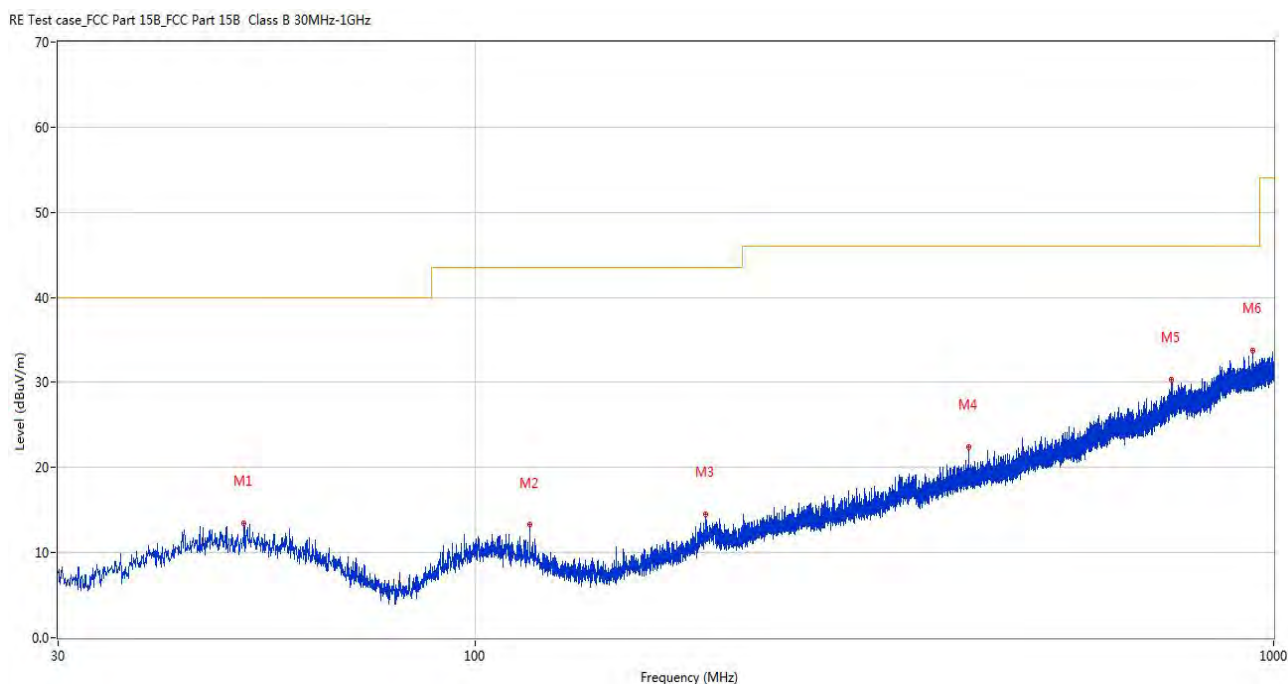

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	51.291	13.43	-24.08	40.0	26.57	Peak	125.10	100	Horizontal	Pass
2	117.009	13.26	-26.51	43.5	30.24	Peak	283.40	100	Horizontal	Pass
3	194.221	14.47	-24.47	43.5	29.03	Peak	107.70	100	Horizontal	Pass
4	414.896	22.45	-17.97	46.0	23.55	Peak	130.90	100	Horizontal	Pass
5	744.162	30.28	-9.04	46.0	15.72	Peak	233.20	100	Horizontal	Pass
6	942.334	33.68	-5.38	46.0	12.32	Peak	183.70	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

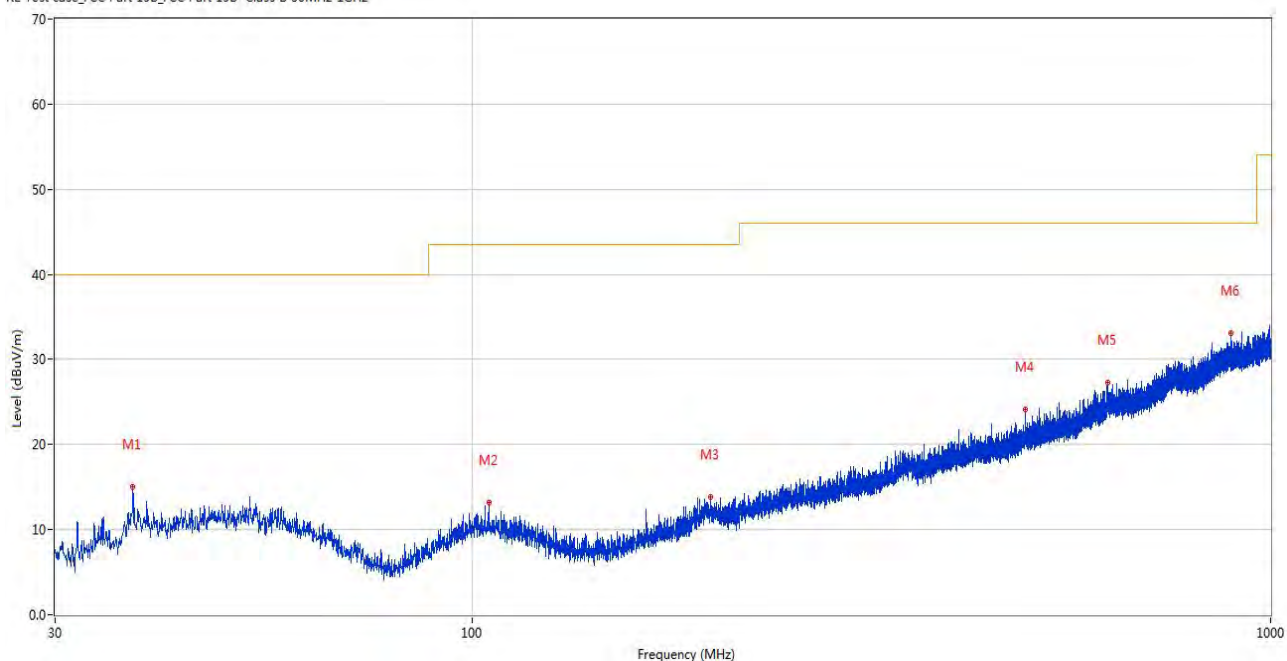


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	37.517	15.08	-26.66	40.0	24.92	Peak	39.20	100	Vertical	Pass
2	104.884	13.17	-25.55	43.5	30.33	Peak	66.20	100	Vertical	Pass
3	198.538	13.79	-24.23	43.5	29.71	Peak	62.30	100	Vertical	Pass
4	493.030	24.10	-15.97	46.0	21.90	Peak	21.20	100	Vertical	Pass
5	625.434	27.32	-11.78	46.0	18.68	Peak	236.20	100	Vertical	Pass
6	892.233	33.06	-6.17	46.0	12.94	Peak	21.20	100	Vertical	Pass

Note ¹: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note ²: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT H

RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

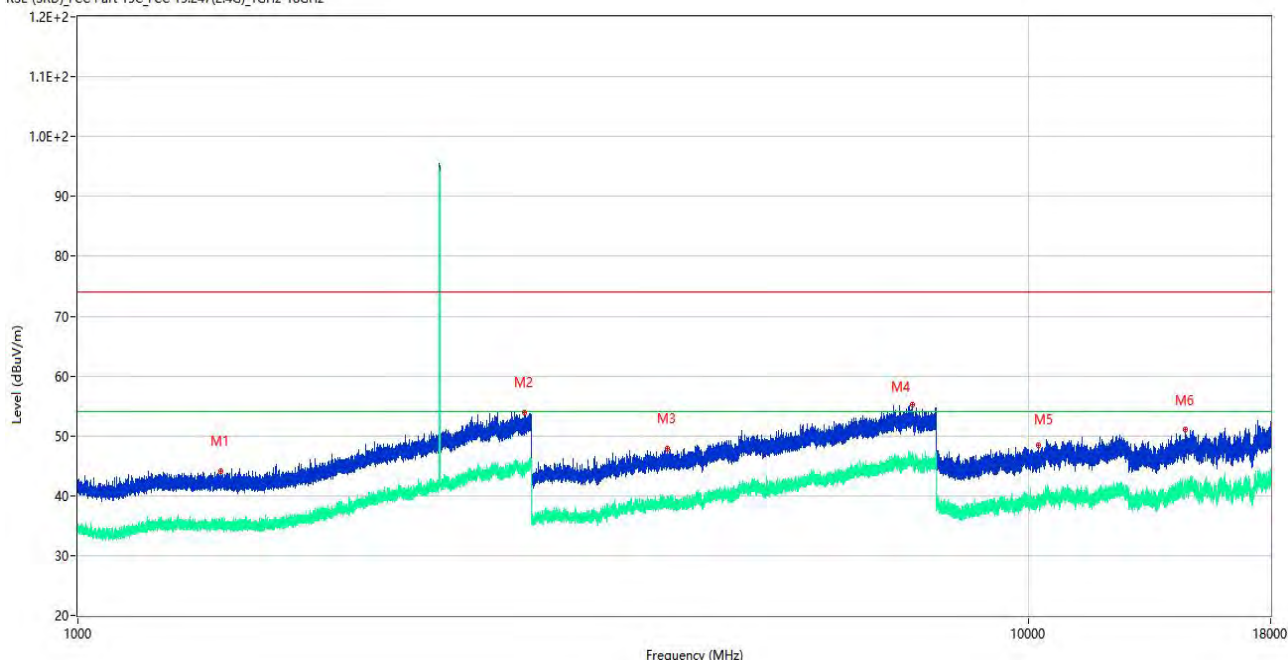

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1413.892	44.30	74.0	29.70	Peak	82.00	200	Horizontal	Pass
1**	1413.892	35.11	54.0	18.89	AV	82.00	200	Horizontal	Pass
2	2957.840	53.98	74.0	20.02	Peak	65.00	400	Horizontal	Pass
2**	2957.840	44.22	54.0	9.78	AV	65.00	400	Horizontal	Pass
3	4172.306	47.92	74.0	26.08	Peak	153.00	200	Horizontal	Pass
3**	4172.306	38.50	54.0	15.51	AV	153.00	200	Horizontal	Pass
4	7557.968	55.21	74.0	18.79	Peak	199.00	400	Horizontal	Pass
4**	7557.968	45.83	54.0	8.17	AV	199.00	400	Horizontal	Pass
5	10252.624	48.43	74.0	25.57	Peak	156.00	200	Horizontal	Pass
5**	10252.624	38.54	54.0	15.46	AV	156.00	200	Horizontal	Pass
6	14638.677	51.06	74.0	22.94	Peak	258.00	200	Horizontal	Pass
6**	14638.677	42.60	54.0	11.40	AV	258.00	200	Horizontal	Pass

GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1162.069	44.49	74.0	29.51	Peak	269.00	200	Vertical	Pass
1**	1162.069	32.63	54.0	21.37	AV	269.00	200	Vertical	Pass
2	2987.411	50.92	74.0	23.08	Peak	34.00	400	Vertical	Pass
2**	2987.411	39.85	54.0	14.15	AV	34.00	400	Vertical	Pass
3	6802.818	52.60	74.0	21.40	Peak	283.00	200	Vertical	Pass
3**	6802.818	43.39	54.0	10.61	AV	283.00	200	Vertical	Pass
4	7969.845	56.52	74.0	17.48	Peak	109.00	400	Vertical	Pass
4**	7969.845	43.74	54.0	10.26	AV	109.00	400	Vertical	Pass
5	12497.006	49.30	74.0	24.70	Peak	49.00	100	Vertical	Pass
5**	12497.006	40.28	54.0	13.72	AV	49.00	100	Vertical	Pass
6	17096.128	52.57	74.0	21.43	Peak	8.00	100	Vertical	Pass
6**	17096.128	43.67	54.0	10.33	AV	8.00	100	Vertical	Pass

GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1412.389	43.42	74.0	30.58	Peak	168.00	400	Horizontal	Pass
1**	1412.389	34.12	54.0	19.88	AV	168.00	400	Horizontal	Pass
2	2954.715	53.29	74.0	20.71	Peak	155.00	300	Horizontal	Pass
2**	2954.715	43.64	54.0	10.36	AV	155.00	300	Horizontal	Pass
3	4174.334	47.49	74.0	26.51	Peak	81.00	200	Horizontal	Pass
3**	4174.334	37.98	54.0	16.03	AV	81.00	200	Horizontal	Pass
4	7559.848	54.26	74.0	19.74	Peak	163.00	400	Horizontal	Pass
4**	7559.848	44.91	54.0	9.09	AV	163.00	400	Horizontal	Pass
5	10258.548	47.63	74.0	26.37	Peak	309.00	300	Horizontal	Pass
5**	10258.548	38.44	54.0	15.56	AV	309.00	300	Horizontal	Pass
6	14642.476	50.59	74.0	23.41	Peak	260.00	400	Horizontal	Pass
6**	14642.476	41.62	54.0	12.38	AV	260.00	400	Horizontal	Pass

GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1165.964	44.35	74.0	29.65	Peak	255.00	300	Vertical	Pass
1**	1165.964	32.15	54.0	21.85	AV	255.00	300	Vertical	Pass
2	2990.618	50.83	74.0	23.17	Peak	142.00	400	Vertical	Pass
2**	2990.618	39.37	54.0	14.63	AV	142.00	400	Vertical	Pass
3	6806.495	52.04	74.0	21.96	Peak	186.00	200	Vertical	Pass
3**	6806.495	42.83	54.0	11.17	AV	186.00	200	Vertical	Pass
4	7969.193	56.23	74.0	17.77	Peak	152.00	200	Vertical	Pass
4**	7969.193	42.81	54.0	11.19	AV	152.00	200	Vertical	Pass
5	12492.391	49.17	74.0	24.83	Peak	284.00	300	Vertical	Pass
5**	12492.391	40.03	54.0	13.97	AV	284.00	300	Vertical	Pass
6	17099.952	52.30	74.0	21.70	Peak	37.00	300	Vertical	Pass
6**	17099.952	43.61	54.0	10.39	AV	37.00	300	Vertical	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1416.106	44.27	74.0	29.73	Peak	340.00	400	Horizontal	Pass
1**	1416.106	34.11	54.0	19.89	AV	340.00	400	Horizontal	Pass
2	2954.405	53.06	74.0	20.94	Peak	175.00	300	Horizontal	Pass
2**	2954.405	44.06	54.0	9.94	AV	175.00	300	Horizontal	Pass
3	4175.456	47.54	74.0	26.46	Peak	39.00	200	Horizontal	Pass
3**	4175.456	37.58	54.0	16.43	AV	39.00	200	Horizontal	Pass
4	7562.826	54.29	74.0	19.71	Peak	159.00	300	Horizontal	Pass
4**	7562.826	45.04	54.0	8.96	AV	159.00	300	Horizontal	Pass
5	10253.529	47.74	74.0	26.26	Peak	51.00	400	Horizontal	Pass
5**	10253.529	38.31	54.0	15.69	AV	51.00	400	Horizontal	Pass
6	14643.947	50.71	74.0	23.29	Peak	102.00	300	Horizontal	Pass
6**	14643.947	41.78	54.0	12.22	AV	102.00	300	Horizontal	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1164.765	44.46	74.0	29.54	Peak	214.00	100	Vertical	Pass
1**	1164.765	32.60	54.0	21.40	AV	214.00	100	Vertical	Pass
2	2988.018	50.86	74.0	23.14	Peak	87.00	300	Vertical	Pass
2**	2988.018	39.81	54.0	14.19	AV	87.00	300	Vertical	Pass
3	6805.781	52.52	74.0	21.48	Peak	116.00	200	Vertical	Pass
3**	6805.781	43.36	54.0	10.64	AV	116.00	200	Vertical	Pass
4	7970.361	56.45	74.0	17.56	Peak	300.00	100	Vertical	Pass
4**	7970.361	43.72	54.0	10.28	AV	300.00	100	Vertical	Pass
5	12489.781	49.30	74.0	24.70	Peak	261.00	200	Vertical	Pass
5**	12489.781	40.25	54.0	13.75	AV	261.00	200	Vertical	Pass
6	17101.833	52.52	74.0	21.48	Peak	357.00	300	Vertical	Pass
6**	17101.833	43.62	54.0	10.38	AV	357.00	300	Vertical	Pass

GFSK (BLE 2Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1288.752	43.67	74.0	30.33	Peak	231.00	200	Horizontal	Pass
1**	1288.752	34.55	54.0	19.45	AV	231.00	200	Horizontal	Pass
2	2768.126	53.10	74.0	20.90	Peak	110.00	300	Horizontal	Pass
2**	2768.126	43.94	54.0	10.06	AV	110.00	300	Horizontal	Pass
3	5166.691	47.53	74.0	26.47	Peak	294.00	200	Horizontal	Pass
3**	5166.691	37.55	54.0	16.46	AV	294.00	200	Horizontal	Pass
4	6810.034	54.36	74.0	19.64	Peak	179.00	300	Horizontal	Pass
4**	6810.034	45.32	54.0	8.68	AV	179.00	300	Horizontal	Pass
5	13468.728	48.20	74.0	25.80	Peak	219.00	100	Horizontal	Pass
5**	13468.728	37.97	54.0	16.03	AV	219.00	100	Horizontal	Pass
6	17468.005	50.22	74.0	23.78	Peak	272.00	100	Horizontal	Pass
6**	17468.005	42.48	54.0	11.52	AV	272.00	100	Horizontal	Pass

GFSK (BLE 2Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1289.578	44.44	74.0	29.56	Peak	251.00	400	Vertical	Pass
1**	1289.578	32.60	54.0	21.40	AV	251.00	400	Vertical	Pass
2	2772.752	50.89	74.0	23.11	Peak	206.00	300	Vertical	Pass
2**	2772.752	39.84	54.0	14.16	AV	206.00	300	Vertical	Pass
3	5169.938	52.56	74.0	21.44	Peak	19.00	200	Vertical	Pass
3**	5169.938	43.34	54.0	10.66	AV	19.00	200	Vertical	Pass
4	6803.404	56.51	74.0	17.49	Peak	163.00	200	Vertical	Pass
4**	6803.404	43.67	54.0	10.33	AV	163.00	200	Vertical	Pass
5	13467.292	49.21	74.0	24.79	Peak	56.00	300	Vertical	Pass
5**	13467.292	40.26	54.0	13.74	AV	56.00	300	Vertical	Pass
6	17468.278	52.53	74.0	21.48	Peak	220.00	200	Vertical	Pass
6**	17468.278	43.58	54.0	10.42	AV	220.00	200	Vertical	Pass

GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1284.949	43.37	74.0	30.63	Peak	167.00	300	Horizontal	Pass
1**	1284.949	34.39	54.0	19.61	AV	167.00	300	Horizontal	Pass
2	2771.917	53.45	74.0	20.55	Peak	26.00	100	Horizontal	Pass
2**	2771.917	44.08	54.0	9.92	AV	26.00	100	Horizontal	Pass
3	5168.264	47.72	74.0	26.28	Peak	16.00	200	Horizontal	Pass
3**	5168.264	37.50	54.0	16.51	AV	16.00	200	Horizontal	Pass
4	6808.441	54.38	74.0	19.62	Peak	336.00	200	Horizontal	Pass
4**	6808.441	44.93	54.0	9.07	AV	336.00	200	Horizontal	Pass
5	13470.707	47.79	74.0	26.21	Peak	300.00	100	Horizontal	Pass
5**	13470.707	38.20	54.0	15.80	AV	300.00	100	Horizontal	Pass
6	17470.174	50.86	74.0	23.14	Peak	262.00	300	Horizontal	Pass
6**	17470.174	42.07	54.0	11.93	AV	262.00	300	Horizontal	Pass

GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1288.690	44.49	74.0	29.51	Peak	50.00	200	Vertical	Pass
1**	1288.690	32.62	54.0	21.38	AV	50.00	200	Vertical	Pass
2	2774.511	50.82	74.0	23.18	Peak	278.00	200	Vertical	Pass
2**	2774.511	39.75	54.0	14.25	AV	278.00	200	Vertical	Pass
3	5168.941	52.56	74.0	21.44	Peak	182.00	200	Vertical	Pass
3**	5168.941	43.30	54.0	10.70	AV	182.00	200	Vertical	Pass
4	6806.365	56.49	74.0	17.51	Peak	91.00	300	Vertical	Pass
4**	6806.365	43.69	54.0	10.31	AV	91.00	300	Vertical	Pass
5	13466.630	49.29	74.0	24.72	Peak	354.00	200	Vertical	Pass
5**	13466.630	40.23	54.0	13.77	AV	354.00	200	Vertical	Pass
6	17463.818	52.52	74.0	21.48	Peak	86.00	200	Vertical	Pass
6**	17463.818	43.65	54.0	10.35	AV	86.00	200	Vertical	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1288.286	43.86	74.0	30.14	Peak	309.00	400	Horizontal	Pass
1**	1288.286	34.13	54.0	19.87	AV	309.00	400	Horizontal	Pass
2	2773.090	53.47	74.0	20.53	Peak	241.00	400	Horizontal	Pass
2**	2773.090	43.24	54.0	10.76	AV	241.00	400	Horizontal	Pass
3	5392.605	47.45	74.0	26.55	Peak	162.00	200	Horizontal	Pass
3**	5392.605	38.43	54.0	15.58	AV	162.00	200	Horizontal	Pass
4	6516.024	54.80	74.0	19.20	Peak	55.00	200	Horizontal	Pass
4**	6516.024	45.63	54.0	8.37	AV	55.00	200	Horizontal	Pass
5	13354.374	48.20	74.0	25.80	Peak	31.00	300	Horizontal	Pass
5**	13354.374	38.22	54.0	15.78	AV	31.00	300	Horizontal	Pass
6	17444.509	50.16	74.0	23.84	Peak	21.00	400	Horizontal	Pass
6**	17444.509	42.45	54.0	11.55	AV	21.00	400	Horizontal	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1283.420	44.40	74.0	29.60	Peak	305.00	200	Vertical	Pass
1**	1283.420	32.54	54.0	21.46	AV	305.00	200	Vertical	Pass
2	2767.510	50.83	74.0	23.17	Peak	112.00	300	Vertical	Pass
2**	2767.510	39.76	54.0	14.24	AV	112.00	300	Vertical	Pass
3	5286.303	52.50	74.0	21.50	Peak	276.00	200	Vertical	Pass
3**	5286.303	43.36	54.0	10.64	AV	276.00	200	Vertical	Pass
4	6654.605	56.45	74.0	17.55	Peak	170.00	300	Vertical	Pass
4**	6654.605	43.69	54.0	10.31	AV	170.00	300	Vertical	Pass
5	13306.219	49.29	74.0	24.71	Peak	33.00	200	Vertical	Pass
5**	13306.219	40.27	54.0	13.73	AV	33.00	200	Vertical	Pass
6	17420.054	52.54	74.0	21.46	Peak	72.00	200	Vertical	Pass
6**	17420.054	43.61	54.0	10.39	AV	72.00	200	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.


Note³: According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note⁴: The Level (dBuV/m) has been corrected by factor.

Note⁵: Both horizontal and vertical directions were pre tested, only the worst configuration has been reported in this report.

Test Data and Plots

GFSK (BLE 1Mbps) LOW CHANNEL

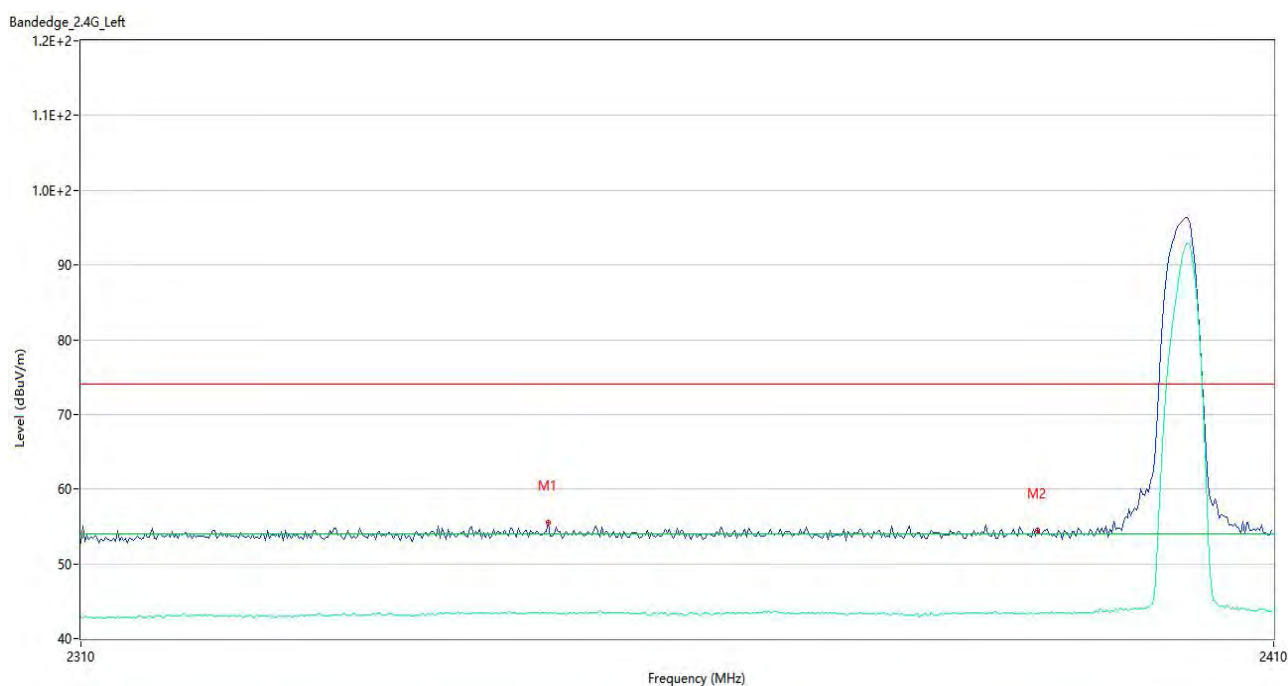

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2347.839	53.37	74.0	20.63	Peak	148.00	100	Horizontal	Pass
1**	2347.839	40.48	54.0	13.52	AV	148.00	100	Horizontal	Pass
2	2390.000	51.55	74.0	22.45	Peak	268.00	300	Horizontal	Pass
2**	2390.000	42.61	54.0	11.39	AV	268.00	300	Horizontal	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.56	74.0	22.44	Peak	284.00	100	Horizontal	Pass
1**	2483.500	42.44	54.0	11.56	AV	284.00	100	Horizontal	Pass
2	2498.084	54.03	74.0	19.97	Peak	19.00	100	Horizontal	Pass
2**	2498.084	40.96	54.0	13.04	AV	19.00	100	Horizontal	Pass

GFSK (BLE 2Mbps) LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2347.687	53.3	74.0	20.70	Peak	342.00	200	Horizontal	Pass
1**	2347.687	42.38	54.0	11.62	AV	342.00	200	Horizontal	Pass
2	2390.000	52.68	74.0	21.32	Peak	172.00	100	Horizontal	Pass
2**	2390.000	41.3	54.0	12.70	AV	172.00	100	Horizontal	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.87	74.0	19.13	Peak	358.00	100	Horizontal	Pass
1**	2483.500	41.61	54.0	12.39	AV	358.00	100	Horizontal	Pass
2	2490.442	55.54	74.0	18.46	Peak	59.00	200	Horizontal	Pass
2**	2490.442	42.47	54.0	11.53	AV	59.00	200	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Test Data

Left Ear

GFSK (BLE 1Mbps)			
Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-8.42	8	Pass
Middle Channel	-9.46	8	Pass
High Channel	-9.21	8	Pass

GFSK (BLE 2Mbps)			
Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-11.58	8	Pass
Middle Channel	-11.88	8	Pass
High Channel	-11.83	8	Pass

Right Ear


GFSK (BLE 1Mbps)			
Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-7.25	8	Pass
Middle Channel	-7.54	8	Pass
High Channel	-6.24	8	Pass

GFSK (BLE 2Mbps)			
Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-10.38	8	Pass
Middle Channel	-10.14	8	Pass
High Channel	-9.68	8	Pass

Test Plots

Left Ear


GFSK (BLE 1Mbps) LOW CHANNEL

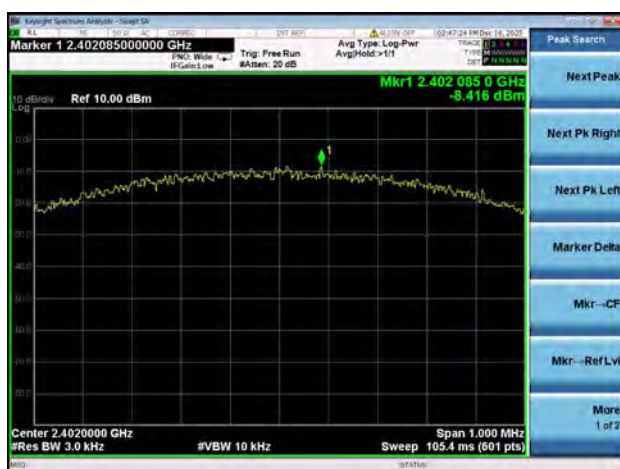


GFSK (BLE 1Mbps) MIDDLE CHANNEL




GFSK (BLE 1Mbps) HIGH CHANNEL

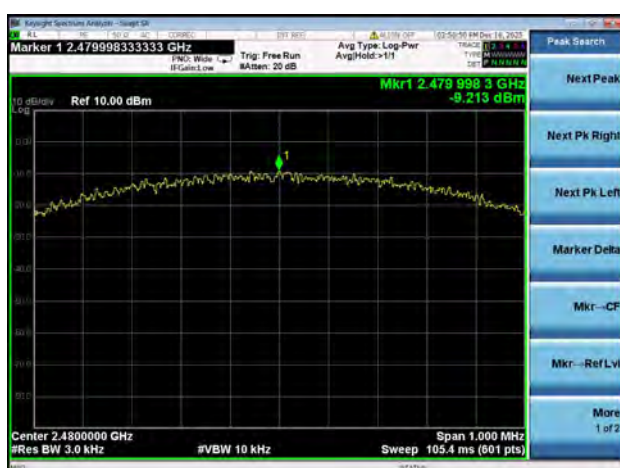


GFSK (BLE 2Mbps) LOW CHANNEL

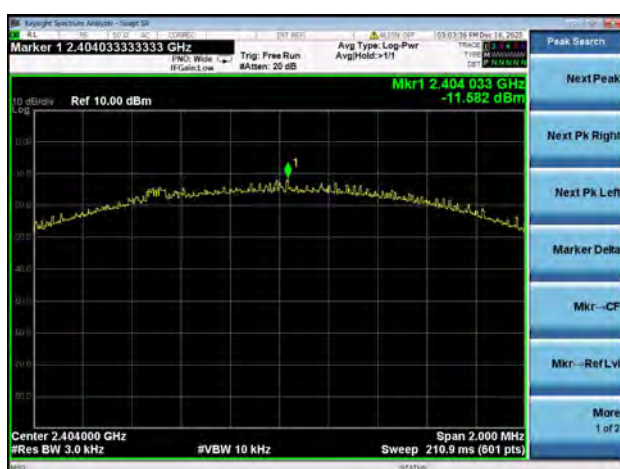

GFSK (BLE 2Mbps) MIDDLE CHANNEL

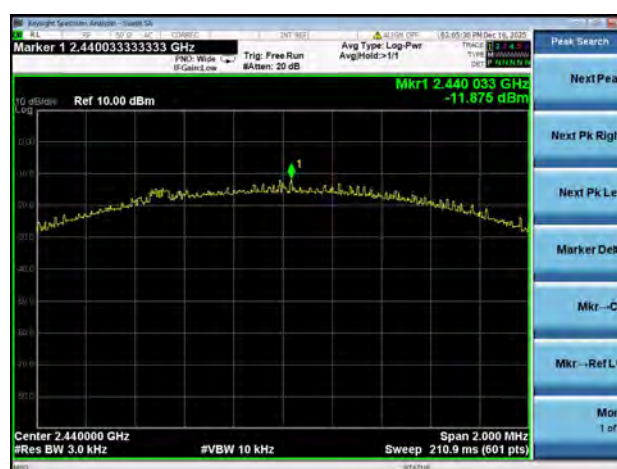


GFSK (BLE 2Mbps) HIGH CHANNEL

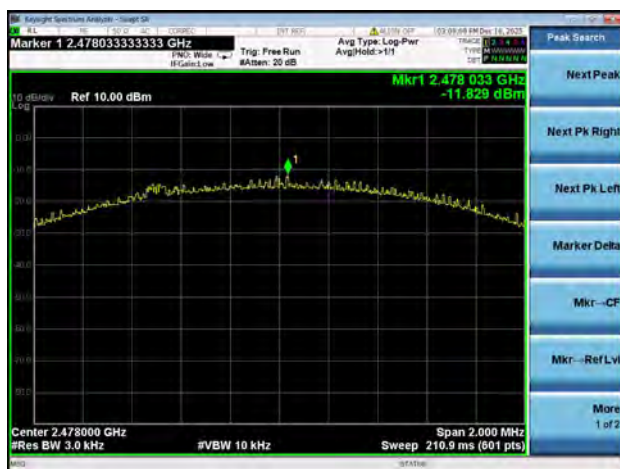


Right Ear


GFSK (BLE 1Mbps) LOW CHANNEL

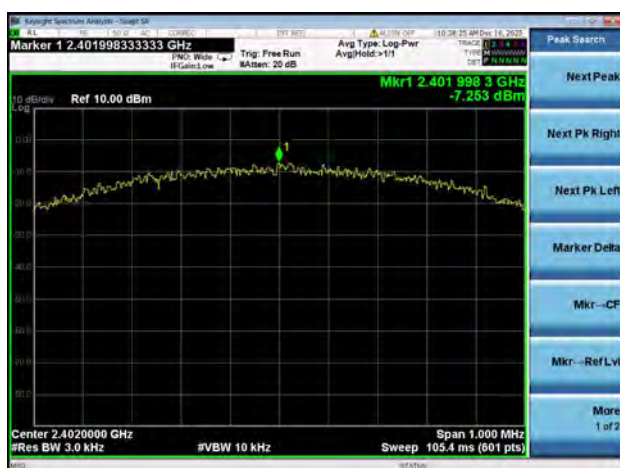


GFSK (BLE 1Mbps) MIDDLE CHANNEL

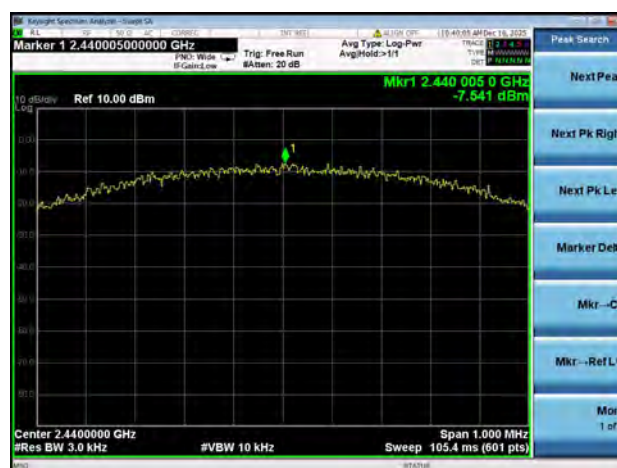

GFSK (BLE 1Mbps) HIGH CHANNEL

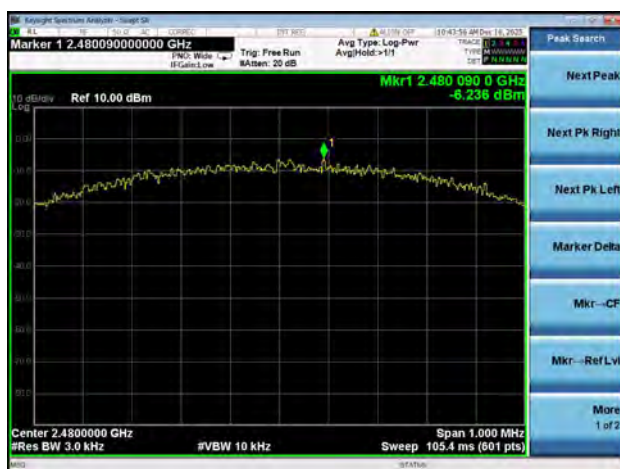

GFSK (BLE 2Mbps) LOW CHANNEL

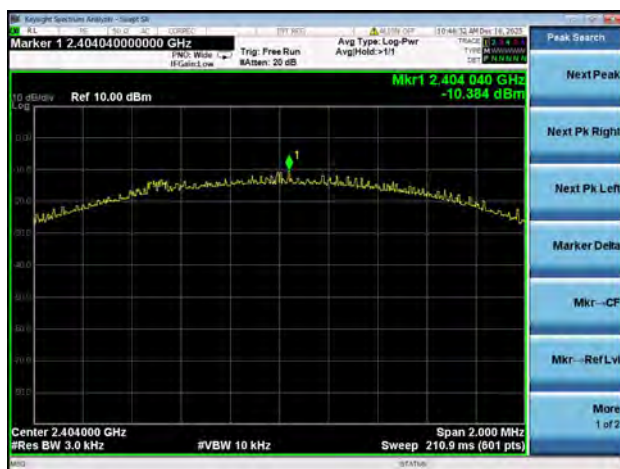

GFSK (BLE 2Mbps) MIDDLE CHANNEL



GFSK (BLE 2Mbps) HIGH CHANNEL



ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ25C0718-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ25C0718-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ25C0718-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--