

TEST REPORT

Applicant & Manufacturer: Innovative Eyewear, Inc.
Address: 11900 Biscayne Bl, Suite 630, North Miami FL 33181
Report Number: 2604T13671E-RF-22A

Test Standard (s)

ETSI EN 300 328 V2.2.2 (2019-07)

Sample Description

Product Name: Aero Bluetooth Glasses
Model No.: LCD012-40, LCD012-10, LCD012-11, LCD012-13, LCD012-14,
LCD012-16, LCD012-17, LCD012-20, LCD012-30, LCD012-50
Trade Mark: 
Date Received: 2026-05-12
Report Date: 2026-09-22

Test Result:	The EUT complied with the standards above.
--------------	--

Prepared and Checked By:

Jason Fan

Jason Fan
Engineer

Approved By:

Bob. Liao

Bob.Liao
Supervisor



Note: The information marked "#" is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
The test standards in this report are not CMA-accredited and carry no legal validity in the People's Republic of China.

Bay Area Compliance Laboratories Corp. (Shenzhen)

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
RELATED SUBMITTAL(S)/GRANT(S)	5
TEST METHODOLOGY	5
TEST FACILITY	6
MEASUREMENT UNCERTAINTY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION.....	7
EUT EXERCISE SOFTWARE AND POWER LEVEL [#]	7
SPECIAL ACCESSORIES	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
§4.3.1.2-RF OUTPUT POWER	11
APPLICABLE STANDARD.....	11
TEST PROCEDURE	11
TEST DATA	12
§4.3.1.4-ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE	13
APPLICABLE STANDARD.....	13
TEST PROCEDURE	14
TEST DATA	15
§4.3.1.5-HOPPING FREQUENCY SEPARATION	16
APPLICABLE STANDARD.....	16
TEST PROCEDURE	16
TEST DATA	18
§4.3.1.8-OCCUPIED CHANNEL BANDWIDTH	19
APPLICABLE STANDARD.....	19
TEST PROCEDURE	19
TEST DATA	19
§4.3.1.9-TRANSMITTER UNWANTED EMISSION IN THE OUT-OF-BAND DOMAIN	20
APPLICABLE STANDARD.....	20
TEST PROCEDURE	20
TEST DATA	20
§4.3.1.10-TRANSMITTER UNWANTED EMISSION IN THE SPURIOUS DOMAIN	21
APPLICABLE STANDARD.....	21
MEASUREMENT UNCERTAINTY	21
TEST PROCEDURE	21
TEST DATA	22
§4.3.1.11-RECEIVER SPURIOUS EMISSIONS	24
APPLICABLE STANDARD.....	24
MEASUREMENT UNCERTAINTY	24
TEST PROCEDURE	24
TEST DATA	25

§4.3.1.12-RECEIVER BLOCKING	27
APPLICABLE STANDARD.....	27
TEST PROCEDURE	28
TEST DATA	28
APPENDIX- LEFT TEMPLE	29
APPENDIX A: RF OUTPUT POWER	30
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	31
APPENDIX C: ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE.....	35
APPENDIX D: HOPPING FREQUENCY SEPARATION	41
APPENDIX E: TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	44
APPENDIX F: RECEIVER BLOCKING	48
APPENDIX- RIGHT TEMPLE	50
APPENDIX A: RF OUTPUT POWER	51
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	52
APPENDIX C: ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE.....	56
APPENDIX D: HOPPING FREQUENCY SEPARATION	62
APPENDIX E: TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	65
APPENDIX F: RECEIVER BLOCKING	69
EXHIBIT A-E.2 INFORMATION AS REQUIRED BY EN 300 328 V2.2.2, CLAUSE 5.4.1	71
EXHIBIT B-EUT PHOTOGRAPHS	76
EXHIBIT C-TEST SETUP PHOTOGRAPHS	77
RADIATED SPURIOUS EMISSIONS TEST VIEW (BELOW 1GHz)	77
RADIATED SPURIOUS EMISSIONS TEST VIEW (ABOVE 1GHz)	77

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	2604T13671E-RF-22A	Original Report	2026-09-22

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name	Aero Bluetooth Glasses
Tested Model	LCD012-40
Multiple Model	LCD012-10, LCD012-11, LCD012-13, LCD012-14, LCD012-16, LCD012-17, LCD012-20, LCD012-30, LCD012-50
Model Difference [#]	Only difference is frame designs. Please refer to DOS letter for more detail. The applicant provided model "LCD012-40" for testing.
Frequency Range	Bluetooth: 2402-2480MHz
Maximum EIRP	Left temple: 6.59 dBm Right temple: 6.55 dBm
Modulation Technique	BDR: DH1/DH3/DH5(GFSK) EDR: 2DH1/2DH3/2DH5($\pi/4$ -DQPSK) EDR: 3DH1/3DH3/3DH5(8DPSK)
Antenna Specification [#]	Internal Antenna, Gain: 3.35 dBi (It is provided by the manufacturer.)
Voltage Range [#]	DC 5.0V from charging port or DC 3.8V from battery
Sample Serial Number	Left temple: 3LU7-2 (RF Radiated Test), 3LU7-1 (RF Conducted Test) Right temple: 3LU7-4 (RF Radiated Test), 3LU7-3 (RF Conducted Test) (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Normal/Extreme Condition [#]	N.V.: Nominal Voltage: 3.8 V _{DC} L.T.: Low Temperature: -10 °C N.T.: Normal Temperature: +25 °C H.T.: High Temperature: +45 °C (Note: the extreme test condition was declared by manufacturer.)
Note: The device comes with an USB cable(0.8 m).	

Objective

This report is in accordance with ETSI EN 300 328 V2.2.2 (2019-07), Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz band; Harmonised Standard for access to radio spectrum.

The objective is to determine the compliance of EUT with ETSI EN 300 328 V2.2.2 (2019-07).

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ETSI EN 300 328 V2.2.2 (2019-07).

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5 %
RF Frequency		0.064×10^{-7}
RF output power, conducted		0.3 dB
Unwanted Emission, conducted		1.2 dB
Emissions Spurious Radiated	30MHz - 1GHz	4.3 dB
	1GHz - 18GHz	4.9 dB
Temperature		1 °C
Humidity		2 %
Supply voltages		0.4 %

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For Bluetooth BDR&EDR mode, 79 channels are provided to testing:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
...	...	...	...	...	...	...	...
...	...	...	...	...	...	...	...
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software and Power Level[#]

Software "BlueTest3" was used during testing and the power level is 5.
The software and power level are provided by manufacturer.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

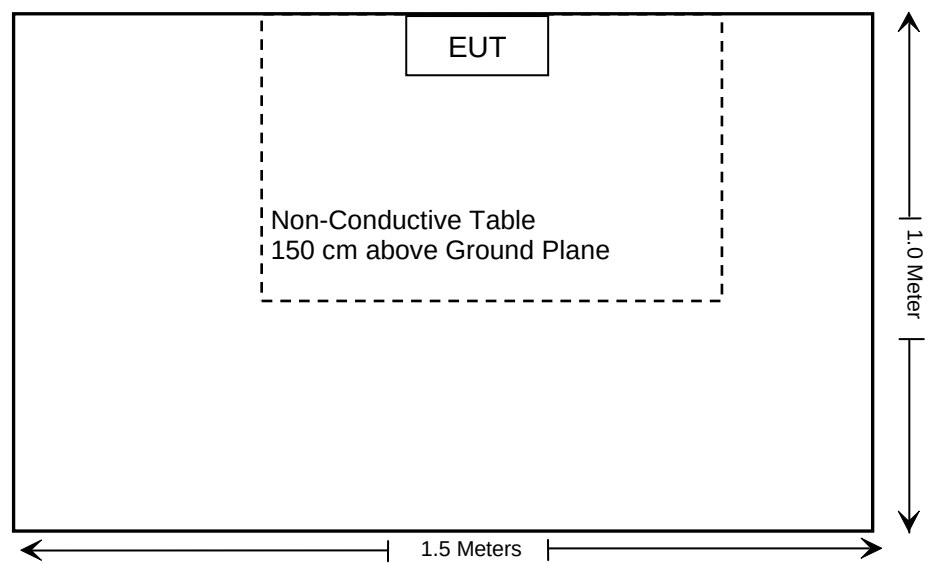

SUMMARY OF TEST RESULTS

ETSI EN 300 328 V2.2.2 (2019-07)	Description of Test	Test Result
§ 4.3.1.2	RF Output Power	Compliance
§ 4.3.1.3	Duty Cycle, Tx-sequence, Tx-gap	Not Applicable
§ 4.3.1.4	Accumulated Transmit Time, Frequency Occupation and Hopping Sequence	Compliance
§ 4.3.1.5	Hopping Frequency Separation	Compliance
§ 4.3.1.6	Medium Utilisation (MU) factor	Not Applicable
§ 4.3.1.7	Adaptivity (Adaptive Frequency Hopping)	Not Applicable*
§ 4.3.1.8	Occupied Channel Bandwidth	Compliance
§ 4.3.1.9	Transmitter unwanted emissions in the out-of-band domain	Compliance
§ 4.3.1.10	Transmitter Unwanted emissions in the spurious domain	Compliance
§ 4.3.1.11	Receiver spurious emissions	Compliance
§ 4.3.1.12	Receiver Blocking	Compliance
§ 4.3.1.13	Geo-location capability	Not Applicable**

Note 1: The supplier declared that the equipment is adaptive equipment.

Note 2: Not Applicable – This item only for non-adaptive mode.

Note 3: Not Applicable* – The test item was not required for adaptive frequency hopping equipment of the output power less than 10mW (e.i.r.p).

Note 4: Not Applicable** –The supplier declared that the equipment has no this function.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Spurious Emission Test(Below 1GHz)					
Rohde& Schwarz	Test Receiver	ESR	102725	2026/05/07	2027/05/06
SONOMA INSTRUMENT	Amplifier	310N	186131	2026/01/20	2027/01/19
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2024/08/08	2027/08/07
Unknown	RF Coaxial Cable	No.12	N040	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.13	N300	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.14	N800	2026/05/07	2027/05/06
Schwarzbeck	Bilog Antenna	VULB9163	9163-194	2026/01/23	2029/01/22
Unknown	RFCoaxialCable	No.40	/	2026/05/07	2027/05/06
Agilent	Signal Generator	N5183A	MY47420360	2026/05/07	2027/05/06
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test(Above 1GHz)					
Rohde&Schwarz	Spectrum Analyzer	FSV40	101948	2026/05/07	2027/05/06
Decentest	Filter Switch Unit	DT7220FSU	DQ77927	2026/05/07	2027/05/06
Decentest	Multiplex Switch Test Control Set	DT7220CSU	DQ77924	2026/05/07	2027/05/06
A.H. Systems, inc.	Preamplifier	PAM-0118	226	2026/01/20	2027/01/19
Schwarzbeck	Horn Antenna	BBHA9120D	837	2026/01/29	2029/01/30
Unknown	RF Coaxial Cable	No.10	N050	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.11	N1000	2026/05/07	2027/05/06
Unknown	RF Coaxial Cable	No.19	N500	2026/05/07	2027/05/06
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2023/12/12	2026/12/11
Unknown	RFCoaxialCable	No.40	/	2026/05/07	2027/05/06
Agilent	Signal Generator	N5183A	MY47420360	2026/05/07	2027/05/06
Test Software: e3 191218 (V9)					
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101495	2026/05/07	2027/05/06
Rohde&Schwarz	Vector Signal Generator	SMBV100A	260434	2026/05/07	2027/05/06
Rohde & Schwarz	Open Switch and ControlUnit	OSP120+OSP-B157	101244+100866	2026/05/07	2027/05/06
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	154606	2026/05/07	2027/05/06
Agilent	10dB Attenuator	8491B	A5825	2026/05/07	2027/05/06
BACL	Temp. & Humid. Chamber	BTH-150-40	30192	2026/05/07	2027/05/06
Test Software: Tonscend JS1120-3 Test System V3.3.38					

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§4.3.1.2-RF OUTPUT POWER

Applicable Standard

According to ETSI EN 300 328 V2.2.2 (2019-07), section 4.3.1.2,

The RF output power is defined as the mean equivalent isotropically radiated power (e.i.r.p.) of the equipment during a transmission burst.

Limit

The RF output power for FHSS equipment shall be equal to or less than 20 dBm.

1) For Non-adaptive FHSS equipment, the manufacturer may have declared a reduced RF Output Power (see clause 5.4.1 m)) and associated Duty Cycle (see clause 5.4.1 e)) that will ensure that the equipment meets the requirement for the Medium Utilization (MU) factor further described in clause 4.3.1.6. This is verified by the conformance test referred to in clause 4.3.1.6.4.

2) For non-adaptive FHSS equipment, where the manufacturer has declared an RF output power lower than 20 dBm e.i.r.p., the RF output power shall be equal to or less than that declared value.

This limit shall apply for any combination of power level and intended antenna assembly.

Test Procedure

The test procedure shall be as follows:

Step 1:

- Use a fast power sensor with a minimum sensitivity of -40 dBm and capable of minimum 1 MS/s.
 - Use the following settings:
 - Sample speed 1 MS/s or faster.
 - The samples shall represent the RMS power of the signal.
 - Measurement duration: For non-adaptive equipment: equal to the observation period defined in clause 4.3.1.3.2 or clause 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) is captured.
- For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.

Step 2:

- For conducted measurements on devices with one transmit chain:
 - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.
- For conducted measurements on devices with multiple transmit chains:
 - Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports.
 - Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than 500 ns.
 - For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples as the new stored data set.

Step 3:

- Find the start and stop times of each burst in the stored measurement samples.
The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.
In case of insufficient sensitivity of the power sensor (e.g. in case of radiated measurements), the value of 30 dB may need to be reduced appropriately.

Step 4:

- Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. The start and stop points shall be included. Save these Pburst values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with k being the total number of samples and n the actual sample number.

Step 5:

- The highest of all Pburst values (value A in dBm) will be used for maximum e.i.r.p. calculations.

Step 6:

- Add the (stated) antenna assembly gain G in dBi of the individual antenna.
- In case of smart antenna systems operating in mode with beamforming (see clause 5.3.2.2.4), add the additional beamforming gain Y in dB.
- If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.
- The RF Output Power (Pout) shall be calculated using the formula below:
$$P_{out} = A + G + Y$$
- This value, which shall comply with the limit given in clause 4.3.1.2.3 or clause 4.3.2.2.3, shall be recorded in the test report.

Test Data

Test Result: Please refer to Appendix.

Note: The cable loss is 0.5 dB[#], which was added into test results.

§4.3.1.4-ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE

Applicable Standard

According to ETSI EN 300 328 V2.2.2 (2019-07), section 4.3.1.4,

The Accumulated Transmit Time is the total of the transmitter 'on'-times, during an observation period, on a particular hopping frequency.

The Frequency Occupation is the number of times that each hopping frequency is occupied within a given period. A hopping frequency is considered to be occupied when the equipment selects that frequency from the Hopping Sequence. FHSS equipment may be transmitting, receiving or stay idle during the dwell time spent on that hopping frequency.

The Hopping Sequence of a FHSS equipment is the pattern of the hopping frequencies used by the equipment.

Limit

For Non-adaptive frequency hopping systems:

The Accumulated Transmit Time on any hopping frequency shall not be greater than 15 ms within any observation period of 15 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.

In order for the FHSS equipment to comply with the Frequency Occupation requirement, it shall meet either of the following two options:

- Option 1: Each hopping frequency of the Hopping Sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.
- Option 2: The probability that each hopping frequency is occupied shall be between $((1 / U) \times 25 \%)$ and 77 % where U is the number of hopping frequencies in use.

The Hopping Sequence(s) shall contain at least N hopping frequencies where N is either 5 or the result of 15 MHz divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

NOTE: See also clause 4.3.1.5.3.1 for the Hopping Frequency Separation applicable to non-adaptive FHSS equipment.

Non-Adaptive FHSS equipment, may blacklist some but not all hopping frequencies. From the N hopping frequencies defined above, the equipment shall transmit on at least one hopping frequency. For the blacklisted frequencies, the equipment has to occupy these frequencies for the duration of the average dwell time (see also definition for blacklisted frequency in clause 3.1).

For Adaptive frequency hopping systems:

Adaptive FHSS equipment shall be capable of operating over a minimum of 70 % of the band specified in table 1.

The Accumulated Transmit Time on any hopping frequency shall not be greater than 400 ms within any observation period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.

In order for the FHSS equipment to comply with the Frequency Occupation requirement, it shall meet either of the following two options:

- Option 1: Each hopping frequency of the Hopping Sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.
- Option 2: The occupation probability for each frequency shall be between $((1 / U) \times 25 \%)$ and 77 % where U is the number of hopping frequencies in use.

The Hopping Sequence(s) shall contain at least N hopping frequencies at all times, where N is either 15 or the result of 15 MHz divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

NOTE: See also clause 4.3.1.5.3.2 for the Hopping Frequency Separation applicable to adaptive FHSS equipment.

For Adaptive FHSS equipment, from the N hopping frequencies defined above, the equipment shall consider at least one hopping frequency for its transmissions. Providing that there is no interference present on this hopping frequency with a level above the detection threshold defined in clause 4.3.1.7.2.2, point 5 or clause 4.3.1.7.3.2, point 5, then the equipment shall have transmissions on this hopping frequency. For Adaptive FHSS equipment using LBT, if a signal is detected during the CCA, the equipment may jump immediately to the next hopping frequency in the Hopping Sequence (see clause 4.3.1.7.2.2, point 2) provided the limit for Accumulated Transmit Time on the new hopping frequency is respected.

Test Procedure

The test procedure shall be as follows:

Step 1:

- The output of the transmitter shall be connected to a spectrum analyser or equivalent.
- The analyser shall be set as follows:
 - Centre Frequency: Equal to the hopping frequency being investigated
 - Frequency Span: 0 Hz
 - RBW: ~ 50 % of the Occupied Channel Bandwidth
 - VBW: $\geq$ RBW
 - Detector Mode: RMS
 - Sweep time: Equal to the applicable observation period (see clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2)
 - Number of sweep points: 30 000
 - Trace mode: Clear/Write
 - Trigger: Free Run

Step 2:

- Save the trace data to a file for further analysis by a computing device using an appropriate software application or program.

Step 3:

- Identify the data points related to the frequency being investigated by applying a threshold.

The data points resulting from transmissions on the hopping frequency being investigated are assumed to have much higher levels compared to data points resulting from transmissions on adjacent hopping frequencies. If a clear determination between these transmissions is not possible, the RBW in step 1 shall be further reduced. In addition, a channel filter may be used.

- Count the number of data points identified as resulting from transmissions on the frequency being investigated and multiply this number by the time difference between two consecutive data points.

Step 4:

- The result in step 3 is the Accumulated Transmit Time which shall comply with the limit provided in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 and which shall be recorded in the test report.

Step 5:

This step is only applicable for equipment implementing Option 1 in clause 4.3.1.4.3.1 or Option 1 in clause 4.3.1.4.3.2 for complying with the Frequency Occupation requirement.

- Make the following changes on the analyser and repeat step 2 and step 3.
 - Sweep time: $4 \times \text{dwell time} \times \text{Actual number of hopping frequencies in use}$.
 - The hopping frequencies occupied by the equipment without having transmissions during the dwell time (blacklisted frequencies) should be taken into account in the actual number of hopping frequencies in use. If this number cannot be determined (number of blacklisted frequencies unknown) it shall be assumed that the equipment uses the maximum possible number of hopping frequencies.
- The result shall be compared to the limit for the Frequency Occupation defined in clause 4.3.1.4.3.1, Option 1 or clause 4.3.1.4.3.2, Option 1. The result of this comparison shall be recorded in the test report.

Step 6:

- Make the following changes on the analyser:
 - Start Frequency: 2 400 MHz
 - Stop Frequency: 2 483,5 MHz
 - RBW: ~ 50 % of the Occupied Channel Bandwidth (single hopping frequency)
 - VBW: $\geq$ RBW
 - Detector Mode: Peak
 - Sweep time: 1 s; this setting may result in long measuring times. To avoid such long measuring times, an FFT analyser may be used
 - Number of sweep points: ~ 400 / Occupied Channel Bandwidth (MHz); the number of sweep points may need to be further increased in case of overlapping channels
 - Trace Mode: Max Hold
 - Trigger: Free Run

- Wait for the trace to stabilize. Identify the number of hopping frequencies used by the Hopping Sequence.
- The result shall be compared to the limit (value N) defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2. This value shall be recorded in the test report.
For equipment with blacklisted frequencies, it might not be possible to verify the number of hopping frequencies in use. However, they shall comply with the requirement for Accumulated Transmit Time and Frequency Occupation assuming the minimum number of hopping frequencies (N) defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 is used.

Step 7:

- For adaptive FHSS equipment, it shall be verified whether the equipment uses 70 % of the band specified in table 1. This verification can be done using the lowest and highest -20 dB points from the total spectrum envelope obtained in step 6. The result shall be recorded in the test report.

Test Data

Test Result: Please refer to Appendix.

Note: The cable loss is 0.5 dB[#], which was added into test results.

§4.3.1.5-HOPPING FREQUENCY SEPARATION

Applicable Standard

According to ETSI EN 300 328 V2.2.2 (2019-07), section 4.3.1.5,

The Hopping Frequency Separation is the frequency separation between two adjacent hopping frequencies.

Limit

For Non-adaptive frequency hopping equipment

For non-adaptive Frequency Hopping equipment, the Hopping Frequency Separation shall be equal or greater than the Occupied Channel Bandwidth (see clause 4.3.1.8), with a minimum separation of 100 kHz.

For FHSS equipment with a maximum declared RF Output power level of less than 10 dBm e.i.r.p. or for non-adaptive FHSS equipment operating in a mode where the RF Output power is less than 10 dBm e.i.r.p., the Hopping Frequency Separation shall be equal to or greater than 100 kHz.

For Adaptive frequency hopping equipment

For adaptive FHSS equipment, the minimum Hopping Frequency Separation shall be 100 kHz.

Adaptive FHSS equipment that switched to a non-adaptive mode for one or more hopping frequencies because interference was detected on each of these hopping frequencies with a level above the threshold level defined in clause 4.3.1.7.2.2, point 5 or clause 4.3.1.7.3.2, point 5, does not have to comply with the Hopping Frequency Separation provided in clause 4.3.1.5.3.1 for non-adaptive FHSS equipment. If the Hopping Frequency Separation is below the Occupied Channel Bandwidth but greater than 100 kHz, the equipment is allowed to continue to operate with this Hopping Frequency Separation as long as the interference remains present on these hopping frequencies. As this relaxed Hopping Frequency Separation only applies to adaptive FHSS equipment, the FHSS equipment shall continue to operate in an adaptive mode on all other hopping frequencies.

Adaptive FHSS equipment which decided to operate in a non-adaptive mode on one or more hopping frequencies without the presence of interference, shall comply with the limit for Hopping Frequency Separation for non-adaptive FHSS equipment defined in clause 4.3.1.5.3.1 (first paragraph) for these hopping frequencies.

Test Procedure

Option 1, the test procedure shall be as follows:

Step 1:

- The output of the transmitter shall be connected to a spectrum analyzer or equivalent.
- The analyzer shall be set as follows:
 - Centre Frequency: Centre of the two adjacent hopping frequencies
 - Frequency Span: Sufficient to see the complete power envelope of both hopping frequencies
 - RBW: 1 % of the span
 - VBW: $3 \times \text{RBW}$
 - Detector Mode: Max Peak
 - Trace Mode: Max Hold
 - Sweep time: Auto

Step 2:

- Wait for the trace to stabilize.
- Use the marker function of the analyser to define the frequencies corresponding to the lower -20 dBr point and the upper -20 dBr point for both hopping frequencies F1 and F2. This will result in $F1_L$ and $F1_H$ for hopping frequency F1 and in $F2_L$ and $F2_H$ for hopping frequency F2. These values shall be recorded in the report.

Step 3:

- Calculate the centre frequencies $F1_C$ and $F2_C$ for both hopping frequencies using the formulas below. These values shall be recorded in the report.

$$F1_C = \frac{F1_L + F1_H}{2} \quad F2_C = \frac{F2_L + F2_H}{2}$$

- Calculate the Hopping Frequency Separation (F_{HS}) using the formula below. This value shall be recorded in the report.

$$F_{HS} = F2_C - F1_C$$

- Compare the measured Hopping Frequency Separation with the limit defined in clause 4.3.1.5.3.

- See figure 4:

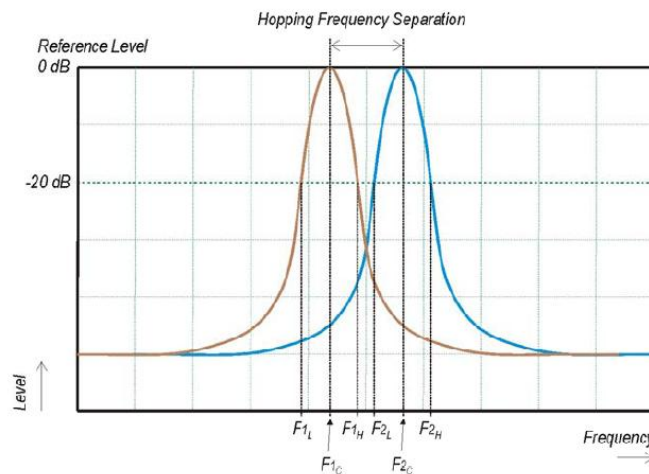


Figure 4: Hopping Frequency Separation

For adaptive systems, in case of overlapping channels which will prevent the definition of the -20 dB reference points $F1_H$ and $F2_L$, a higher reference level (e.g. -10 dB or -6 dB) may be chosen to define the reference points $F1_L$, $F1_H$, $F2_L$ and $F2_H$.

Alternatively, special test software may be used to:

- force the UUT to hop or transmit on a single Hopping Frequency by which the -20 dB reference points can be measured separately for the two adjacent Hopping Frequencies; and/or;
- force the UUT to operate without modulation by which the centre frequencies $F1_C$ and $F2_C$ can be measured directly.

The method used to measure the Hopping Frequency Separation shall be documented in the test report.

Option 2, the test procedure shall be as follows:

Step 1:

- The output of the transmitter shall be connected to a spectrum analyzer or equivalent.
- The analyzer shall be set as follows:
Centre Frequency: Centre of the two adjacent hopping frequencies
Frequency Span: Sufficient to see the complete power envelope of both hopping frequencies
RBW: 1 % of the span
VBW: $3 \times \text{RBW}$
Detector Mode: Max Peak
Trace Mode: Max Hold
Sweep Time: Auto

Step 2:

- Wait for the trace to stabilize.
- Use the marker-delta function to determine the Hopping Frequency Separation between the centres of the two adjacent hopping frequencies (e.g. by indentifying peaks or notches at the centre of the power envelope for the two adjacent signals). This value shall be compared with the limits defined in clause 4.3.1.5.3 and shall be recorded in the test report.

Note: Test with option 2 method.

Test Data

Test Result: Please refer to Appendix.

Note: The cable loss is 0.5 dB[#], which was added into test results.

§4.3.1.8-OCCUPIED CHANNEL BANDWIDTH

Applicable Standard

According to ETSI EN 300 328 V2.2.2 (2019-07), section 4.3.1.8,

The Occupied Channel Bandwidth is the bandwidth that contains 99 % of the power of the signal when considering a single hopping frequency.

Limit

The Occupied Channel Bandwidth for each hopping frequency shall be within the band given in table 1.

In addition, for non-adaptive FHSS equipment with e.i.r.p. greater than 10 dBm, the Occupied Channel Bandwidth for every occupied hopping frequency shall be equal to or less than 5 MHz.

Test Procedure

The conformance tests for this requirement are defined in clause 5.4.7.

Test Data

Test Result: Please refer to Appendix.

Note: The cable loss is 0.5 dB[#], which was added into test results.

§4.3.1.9-TRANSMITTER UNWANTED EMISSION IN THE OUT-OF-BAND DOMAIN

Applicable Standard

According to ETSI EN 300 328 V2.2.2 (2019-07), section 4.3.1.9,

In the present document, transmitter unwanted emissions in the out-of-band domain are emissions when the equipment is in Transmit mode, on frequencies immediately outside the allocated band, but excluding unwanted emissions in the spurious domain.

Limit

The transmitter unwanted emissions in the out-of-band domain shall not exceed the values provided by the mask in figure 1.

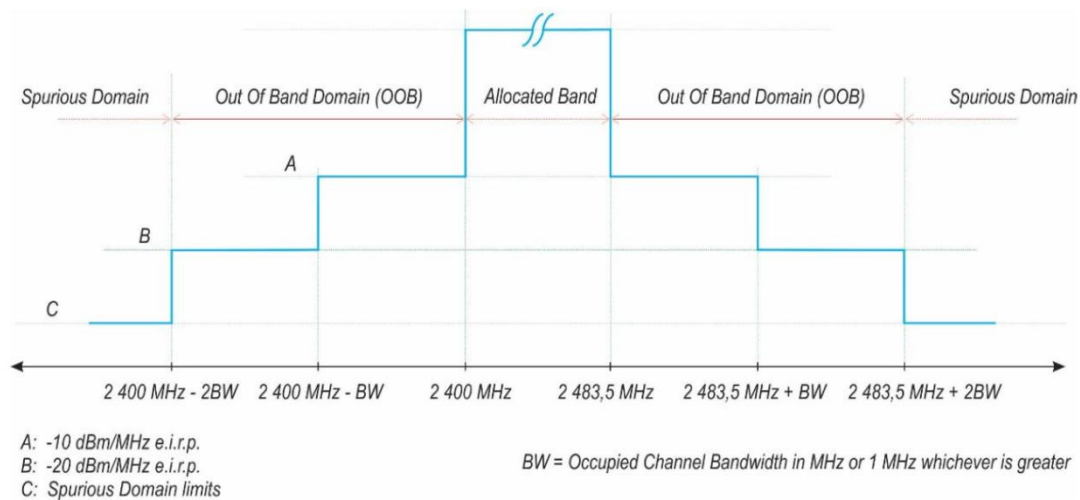


Figure 1: Transmit mask

Test Procedure

The conformance tests for this requirement are defined in clause 5.4.8.

Test Data

Test Result: Please refer to Appendix.

Note: The cable loss is $0.5\text{ dB}^\#$, which was added into test results.

§4.3.1.10-TRANSMITTER UNWANTED EMISSION IN THE SPURIOUS DOMAIN

Applicable Standard

According to ETSI EN 300 328 V2.2.2 (2019-07), section 4.3.1.10,

In the present document, transmitter unwanted emissions in the spurious domain are emissions outside the allocated band and outside the out-of-band domain as indicated in figure 1 when the equipment is in Transmit mode.

The transmitter unwanted emissions in the spurious domain shall not exceed the values given in table 4.

In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.

Transmitter limits for spurious emissions

Frequency Range	Maximum power e.r.p (≤ 1 GHz) e.i.r.p (> 1 GHz)	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87.5 MHz	-36 dBm	100 kHz
87.5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12.75 GHz	-30 dBm	1 MHz

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Test Procedure

Conducted measurement

In case of conducted measurements, the radio equipment shall be connected to the measuring equipment via a suitable attenuator.

The spectrum in the spurious domain (see figures 1 or 3) shall be searched for emissions that exceed the limit values given in table or that come to within 6 dB below these limits. Each occurrence shall be recorded.

The measurement procedure refer to ETSI EN 300 328 V2.2.2 (2019-07) §5.4.9.2.1

Radiated measurement:

The test site as described in annex B and applicable measurement procedures as described in Annex A shall be used.

The test procedure is further as described under clause 5.4.9.2.1.

Test Data**Environmental Conditions**

Item:	RSE Below 1GHz	RSE Above 1GHz
Temperature:	22.5-24.6 °C	25.2-25.7 °C
Relative Humidity:	47-48 %	56 %
ATM Pressure:	99.2-100.6 kPa	100.1-100.6 kPa
Test Engineer:	Jayden Luo	Max Tao Angle Chen
Test Date:	2026-05-21 to 2026-09-21	2026-05-16 to 2026-09-15
EUT Operation Mode:	BT Transmitting	BT Transmitting

Test Result: Compliance, please refer to the below data.

Note: Choose the GFSK mode with the highest conducted power for testing.

30MHz-12.75GHz (For Radiated Spurious Emission)

Left temple

Frequency (MHz)	Receiver Reading (dBm)	Rx Antenna Polar (H/V)	Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Low Channel						
602.22	-78.39	H	9.3	-69.09	-54	-15.09
669.61	-77.97	V	8.02	-69.95	-54	-15.95
4804	-55.38	H	5.25	-50.13	-30	-20.13
4804	-56.23	V	5.52	-50.71	-30	-20.71
High Channel						
602.22	-78.47	H	9.3	-69.17	-54	-15.17
669.61	-77.78	V	8.02	-69.76	-54	-15.76
4960	-55.27	H	5.59	-49.68	-30	-19.68
4960	-56.19	V	5.20	-50.99	-30	-20.99

Right temple:

Frequency (MHz)	Receiver Reading (dBm)	Rx Antenna Polar (H/V)	Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Low Channel						
613.68	-78.45	H	10.10	-68.35	-54	-14.35
666.97	-78.28	V	7.86	-70.42	-54	-16.42
4804	-55.42	H	5.25	-50.17	-30	-20.17
4804	-55.08	V	5.52	-49.56	-30	-19.56
High Channel						
613.68	-78.08	H	10.10	-67.98	-54	-13.98
666.97	-78.05	V	7.86	-70.19	-54	-16.19
4960	-56.06	H	5.59	-50.47	-30	-20.47
4960	-55.75	V	5.20	-50.55	-30	-20.55

Note 1: Absolute Level = Reading Level + Substituted Factor

Note 2: Substituted Factor contains: Substituted Level - Cable loss+ Antenna Gain

Note 3: Margin = Absolute Level – Limit

Note 4: Other emissions below limit more than 20dB or in noise floor was not recorded.

§4.3.1.11-RECEIVER SPURIOUS EMISSIONS

Applicable Standard

According to ETSI EN 300 328 V2.2.2 (2019-07), section 4.3.1.11,

Receiver spurious emissions are emissions at any frequency when the equipment is in receive mode.

Limit

The receiver spurious emissions shall not exceed the values given in table 5.

In case of FHSS equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.

Spurious emission limits for receivers

Frequency range	Maximum power e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	Measurement bandwidth
30 MHz to 1GHz	-57 dBm	100 kHz
1 GHz to 12.75GHz	-47 dBm	1 MHz

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Test Procedure

Conducted measurement:

In case of conducted measurements, the radio equipment shall be connected to the measuring equipment via a suitable attenuator.

The spectrum in the spurious domain (see figures 1 or 3) shall be searched for emissions that exceed the limit values given in table or that come to within 6 dB below these limits. Each occurrence shall be recorded.

The measurement procedure refer to ETSI EN 300 328 V2.2.2 (2019-07) §5.4.10.2.1

Radiated measurement

The test site as described in annex B and applicable measurement procedures as described in Annex A shall be used.

The test procedure is further as described under clause 5.4.10.2.1.

Test Data**Environmental Conditions**

Item:	RSE Below 1GHz	RSE Above 1GHz
Temperature:	22.5-24.6 °C	25.2-25.7 °C
Relative Humidity:	47-48 %	56 %
ATM Pressure:	99.2-100.6 kPa	100.1-100.6 kPa
Test Engineer:	Jayden Luo	Max Tao Angle Chen
Test Date:	2026-05-21 to 2026-09-21	2026-05-16 to 2026-09-15
EUT Operation Mode:	BT Receiving	BT Receiving

Test Result: Compliance, please refer to the below data.

Note: Choose the GFSK mode with the highest conducted power for testing.

30MHz-12.75GHz (For Radiated Spurious Emission)

Left temple

Frequency (MHz)	Receiver Reading (dBm)	Rx Antenna Polar (H/V)	Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Low Channel						
807.08	-77.2	H	10.92	-66.28	-57	-9.28
832.22	-77.31	V	9.48	-67.83	-57	-10.83
2024.25	-58.68	H	-0.31	-58.99	-47	-11.99
3027.25	-57.43	V	2.67	-54.76	-47	-7.76
High Channel						
807.08	-76.96	H	10.92	-66.04	-57	-9.04
832.22	-77.01	V	9.48	-67.53	-57	-10.53
2024.25	-59.03	H	-0.31	-59.34	-47	-12.34
3027.25	-57.39	V	2.67	-54.72	-47	-7.72

Right temple

Frequency (MHz)	Receiver Reading (dBm)	Rx Antenna Polar (H/V)	Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Low Channel						
614.75	-78.79	H	10.18	-68.61	-57	-11.61
879.09	-77.31	V	10.93	-66.38	-57	-9.38
1990.25	-59.05	H	-0.41	-59.46	-47	-12.46
2997.5	-58.23	V	2.7	-55.53	-47	-8.53
High Channel						
614.75	-78.99	H	10.18	-68.81	-57	-11.81
879.09	-77.32	V	10.93	-66.39	-57	-9.39
1990.25	-59.12	H	-0.41	-59.53	-47	-12.53
2997.5	-58.25	V	2.7	-55.55	-47	-8.55

Note 1: Absolute Level = Reading Level + Substituted Factor

Note 2: Substituted Factor contains: Substituted Level - Cable loss+ Antenna Gain

Note 3: Margin = Absolute Level – Limit

Note 4: Other emissions below limit more than 20dB or in noise floor was not recorded.

§4.3.1.12-RECEIVER BLOCKING

Applicable Standard

According to ETSI EN 300 328 V2.2.2 (2019-07), section 4.3.1.12,

This requirement applies to all receiver categories as defined in clause 4.2.3.

Receiver blocking is a measure of the ability of the equipment to receive a wanted signal on its operating channel without exceeding a given degradation due to the presence of an unwanted input signal (blocking signal) on frequencies other than those of the operating band and spurious responses.

Performance Criteria

For equipment that supports a PER or FER test to be performed, the minimum performance criterion shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER test to be performed, the minimum performance criterion shall be no loss of the wireless transmission function needed for the intended use of the equipment.

Limit

While maintaining the minimum performance criteria as defined in clause 4.3.1.12.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 6, table 7 or table 8.

Table 6: Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + 10 × log ₁₀ (OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
(-139 dBm + 10 × log ₁₀ (OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		
NOTE 1: OCBW is in Hz.			
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P _{min} + 26 dB where P _{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P _{min} + 20 dB where P _{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

Table 7: Receiver Blocking parameters receiver Category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

Table 8: Receiver Blocking parameters receiver Category 3 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 20 \text{ dB})$ or $(-74 \text{ dBm} + 20 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 30 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

Test Procedure

The conformance tests for this requirement are defined in clause 5.4.11.

Test Data

Test Result: Please refer to Appendix.

Note: The cable loss is $0.5 \text{ dB}^{\#}$, which was added into test results.

APPENDIX- LEFT TEMPLE

Test Information:

Sample No.:	3LU7-1	Test Date:	2026.5.15
Test Site:	RF	Test Mode:	Transmitting/ Receiving
Tester:	Cayde Hou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.1	Relative Humidity: (%)	48	ATM Pressure: (kPa)	100.6
----------------------	------	------------------------------	----	------------------------	-------

Appendix A: RF Output Power**Test Result**


Test Condition	Test Mode	Antenna	Freq.(MHz)	EIRP[dBm]	Limit[dBm]	Verdict
NTNV	DH1	Ant1	Hop	6.56	20	PASS
	2DH1	Ant1	Hop	6.59	20	PASS
	3DH1	Ant1	Hop	6.52	20	PASS
LTVN	DH1	Ant1	Hop	6.17	20	PASS
	2DH1	Ant1	Hop	6.26	20	PASS
	3DH1	Ant1	Hop	6.36	20	PASS
HTNV	DH1	Ant1	Hop	6.30	20	PASS
	2DH1	Ant1	Hop	6.22	20	PASS
	3DH1	Ant1	Hop	6.14	20	PASS

Note:The antenna gain is 3.35 dBi[#] which was added into the EIRP.


Appendix B: Occupied Channel Bandwidth**Test Result**

Test Mode	Antenna	Freq.[MHz]	OCB[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.857	2401.5764	2402.4336	2400 to 2483.5	PASS
		2480	0.853	2479.5784	2480.4316	2400 to 2483.5	PASS
2DH1	Ant1	2402	1.159	2401.4106	2402.5694	2400 to 2483.5	PASS
		2480	1.159	2479.4106	2480.5694	2400 to 2483.5	PASS
3DH1	Ant1	2402	1.167	2401.4246	2402.5914	2400 to 2483.5	PASS
		2480	1.167	2479.4246	2480.5914	2400 to 2483.5	PASS

Test Graphs

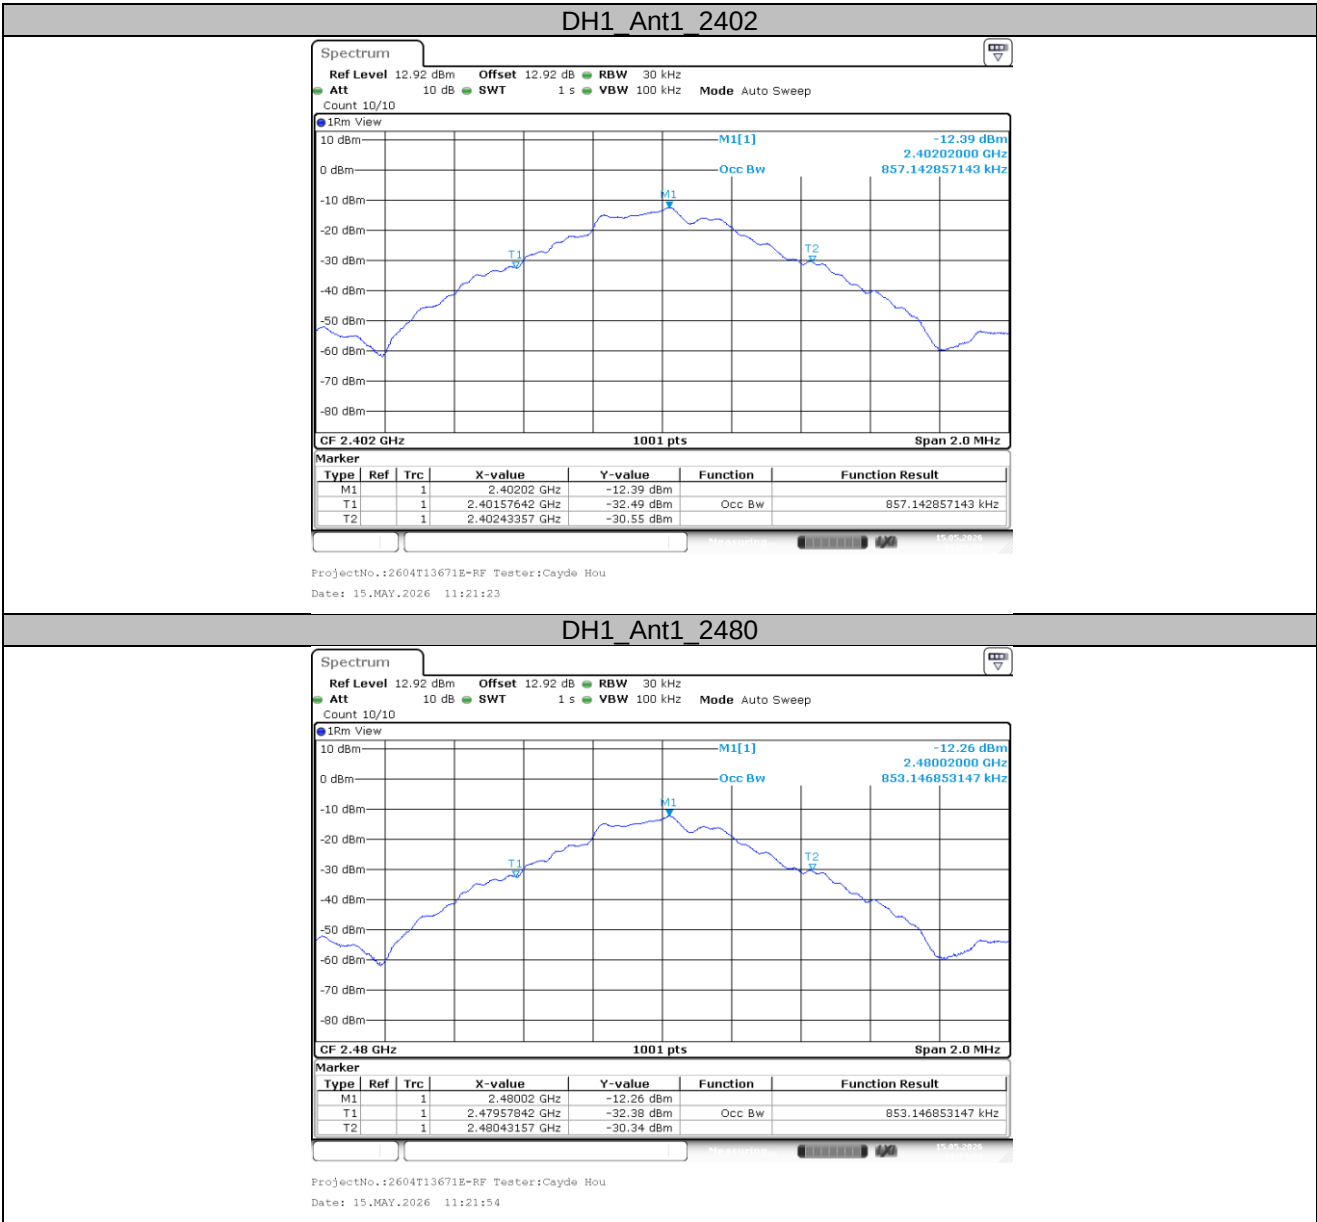


2DH1_Ant1_2402

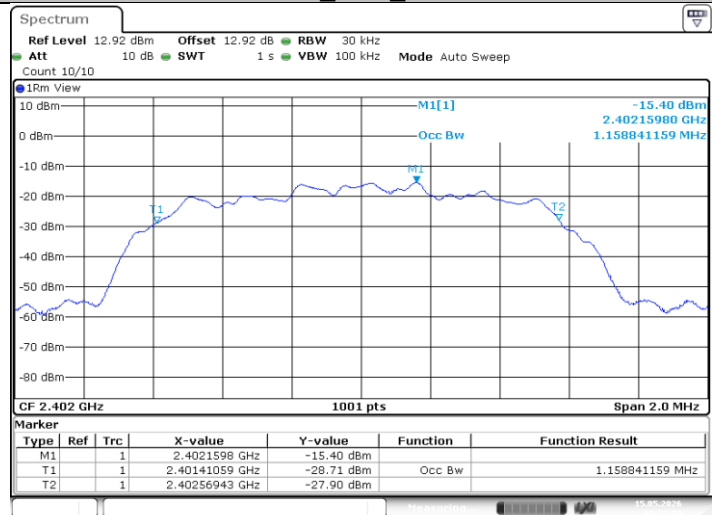


ProjectNo.:2604T13671E-RF Tester:Cayde Hou
Date: 15.MAY.2026 11:22:30

2DH1_Ant1_2480

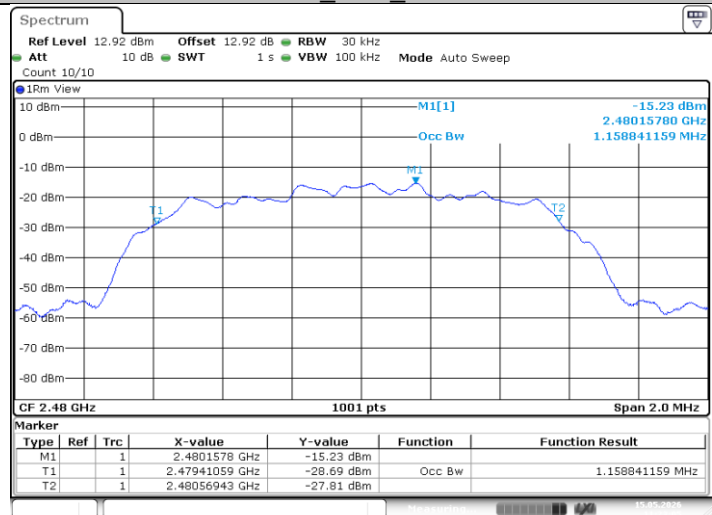


ProjectNo.:2604T13671E-RF Tester:Cayde Hou
Date: 15.MAY.2026 11:23:06

3DH1_Ant1_2402

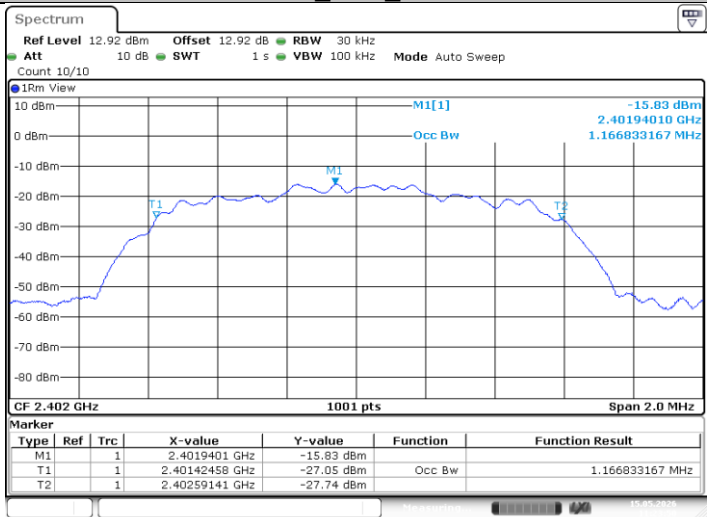

ProjectNo.:2604T13671E-RF Tester:Cayde Hou
Date: 15.MAY.2026 11:23:51

3DH1_Ant1_2480

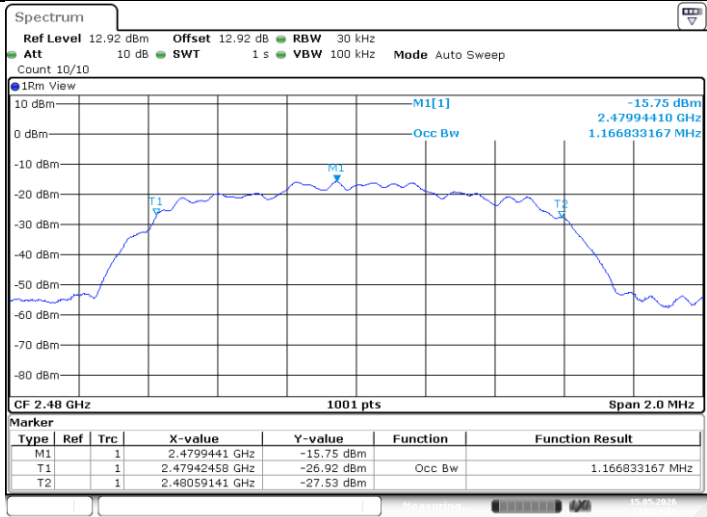

ProjectNo.:2604T13671E-RF Tester:Cayde Hou
Date: 15.MAY.2026 11:24:26

Appendix C: Accumulated Transmit Time, Frequency Occupation and Hopping Sequence

Test Result

Note: For Accumulated Transmit time and Maximum Frequency Occupation, pre-scan GFSK, $\pi/4$ DQPSK, 8DPSK mode, the worse case 8DPSK is recorded.

Accumulated Transmit Time

Test Mode	Antenna	Freq.[MHz]	Result [ms]	Limit[ms]	Verdict
3DH5	Ant1	Hop_2402	385.508	400	PASS
		Hop_2480	390.774	400	PASS

Frequency Occupation


Test Mode	Antenna	Freq.[MHz]	Result [Num.]	Limit[Num.]	Verdict
3DH5	Ant1	Hop_2402	2	1	PASS
		Hop_2480	6	1	PASS

Hopping Sequence

Test Mode	Antenna	Freq.[MHz]	Hop. [Num.]	Limit[Num.]	Band Use[%]	Limit [%]	Verdict
DH1	Ant1	Hop	79	15	95.94	70	PASS
2DH1	Ant1	Hop	79	15	96.52	70	PASS
3DH1	Ant1	Hop	79	15	96.52	70	PASS


Test Graphs

3DH5_Ant1_Hop_2402

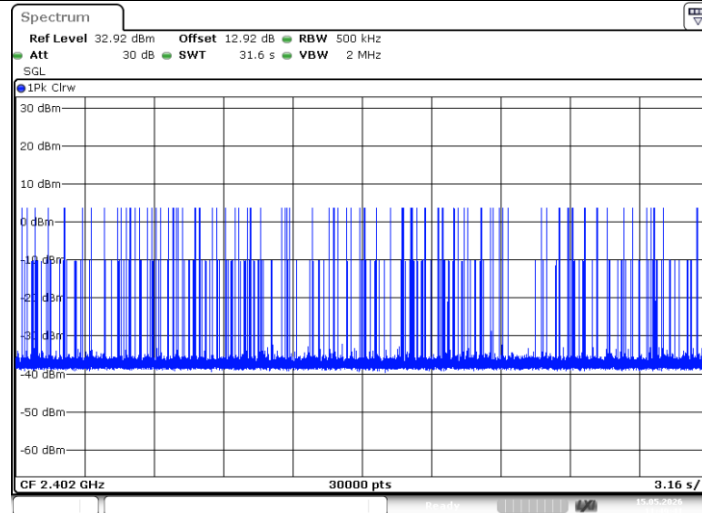



ProjectNo.:2604T13671E-RF Tester:Cayde Hou
Date: 15.MAY.2026 11:49:42

3DH5_Ant1_Hop_2480

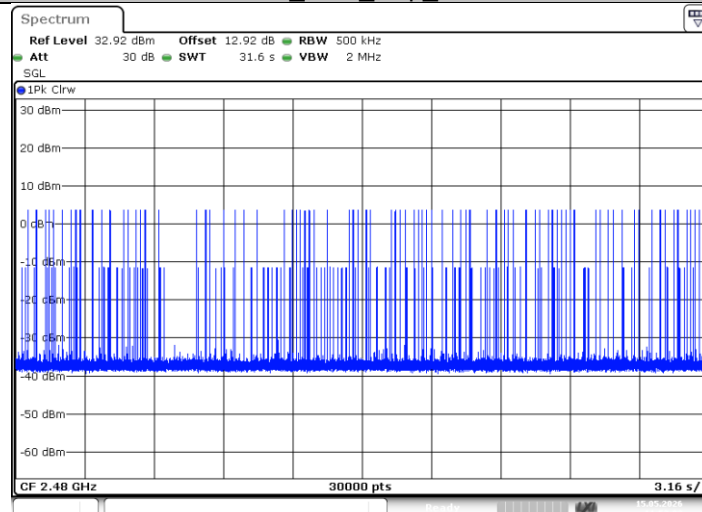


ProjectNo.:2604T13671E-RF Tester:Cayde Hou
Date: 15.MAY.2026 11:53:03

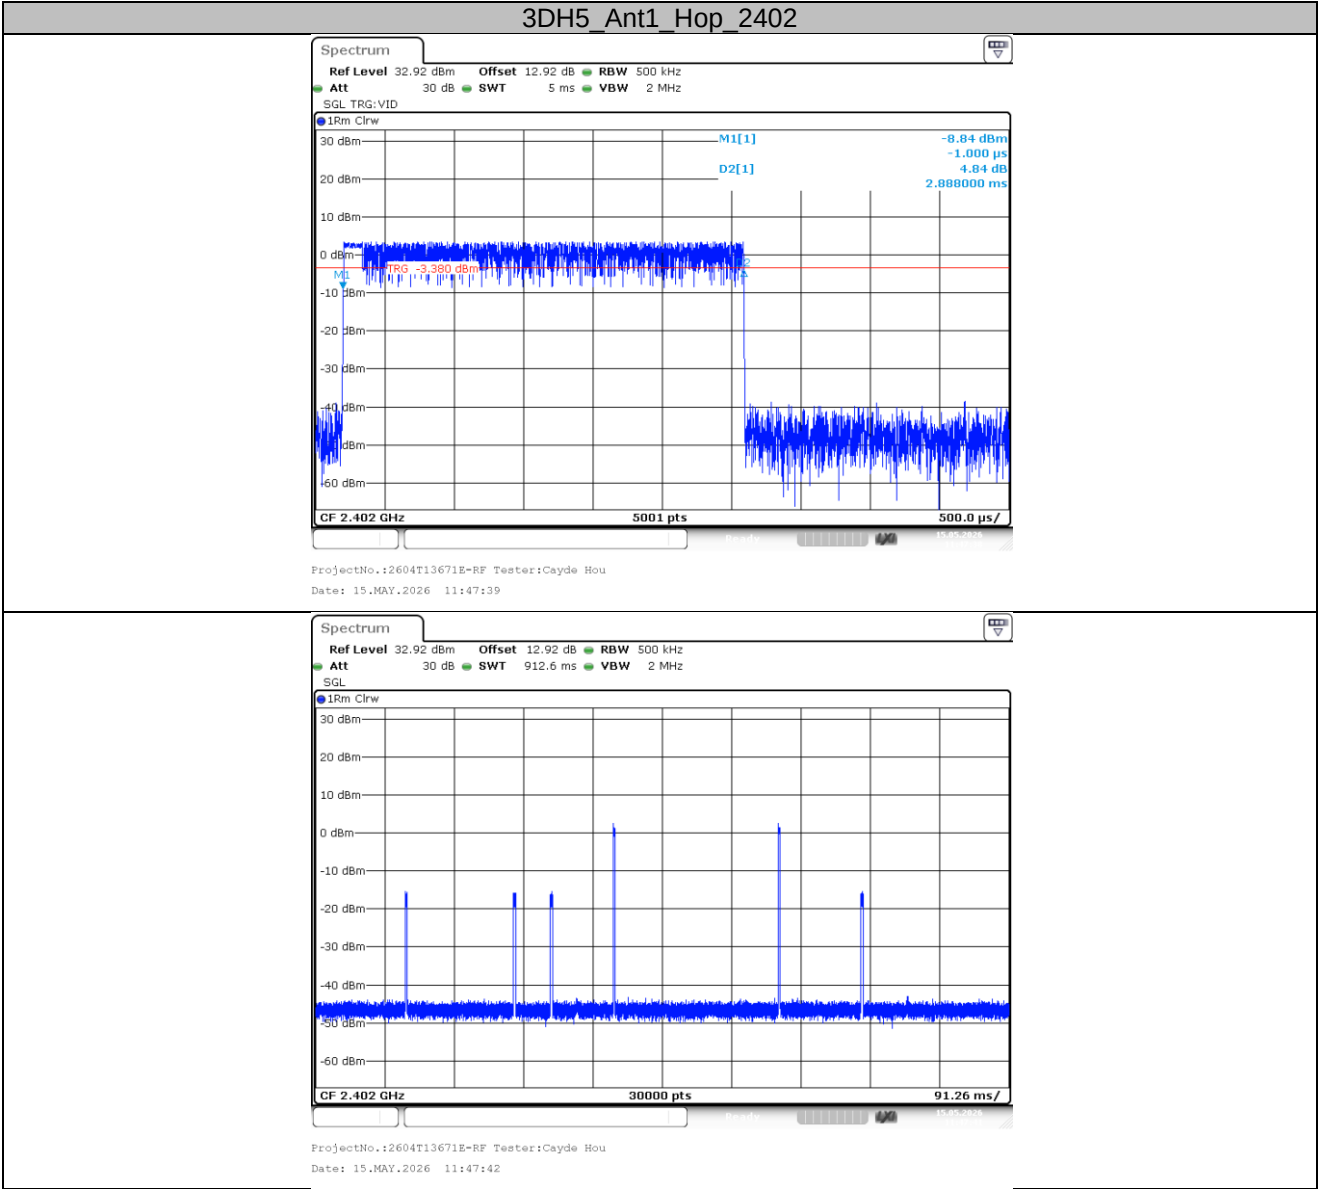

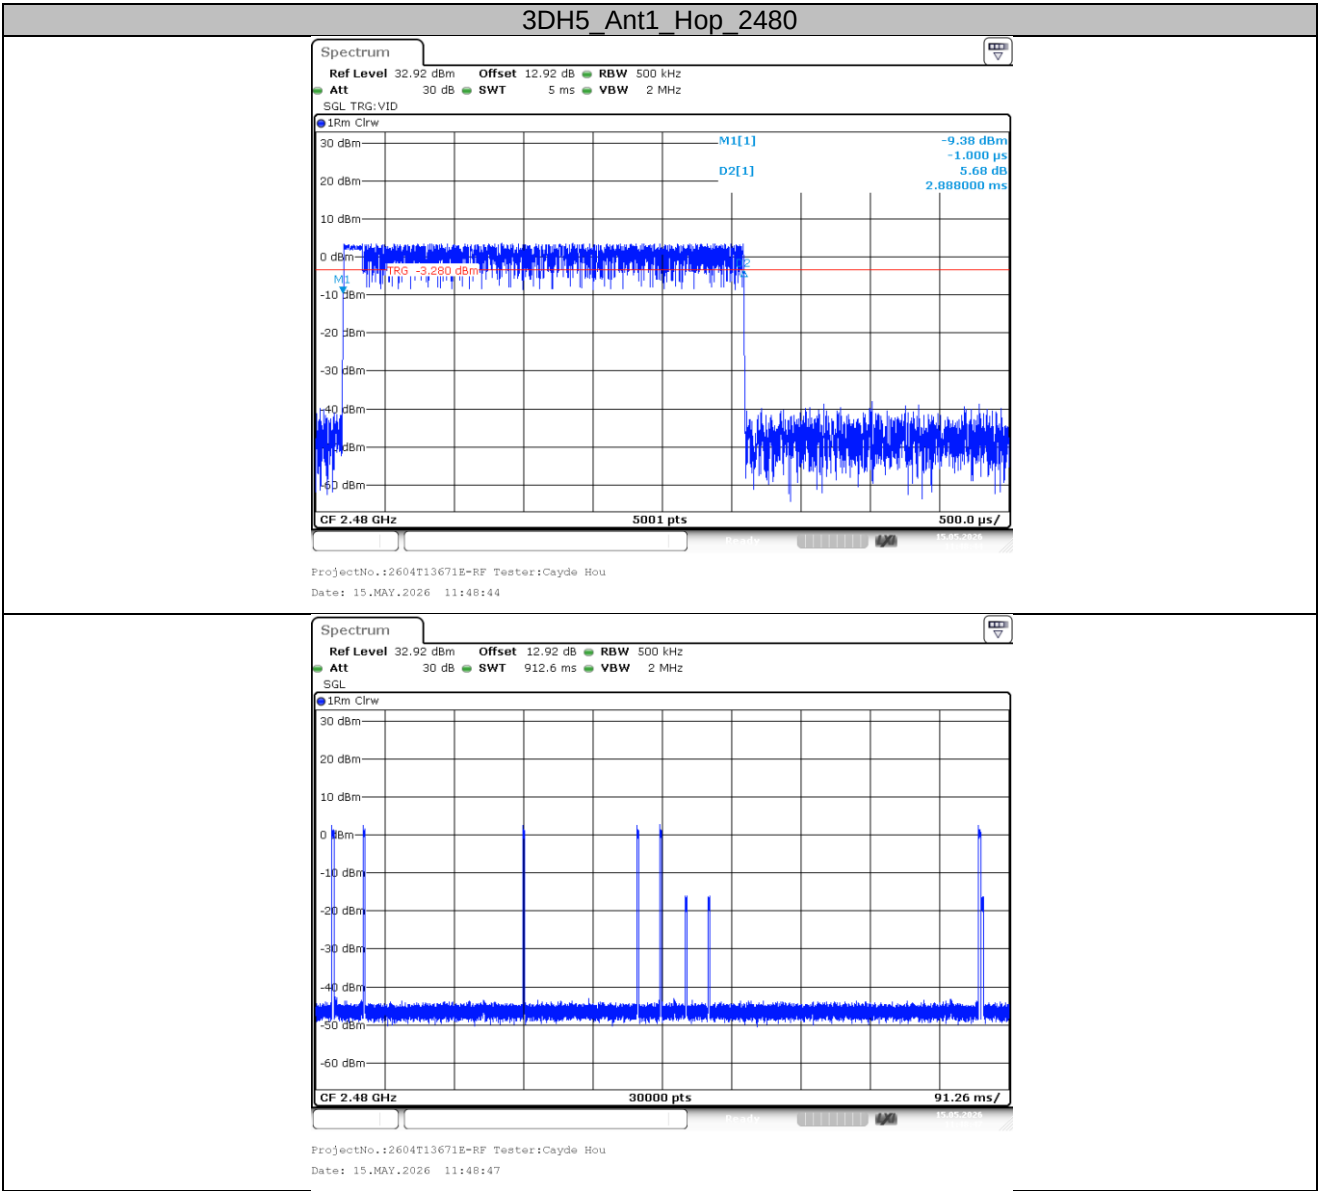


DH1_Ant1_Hop

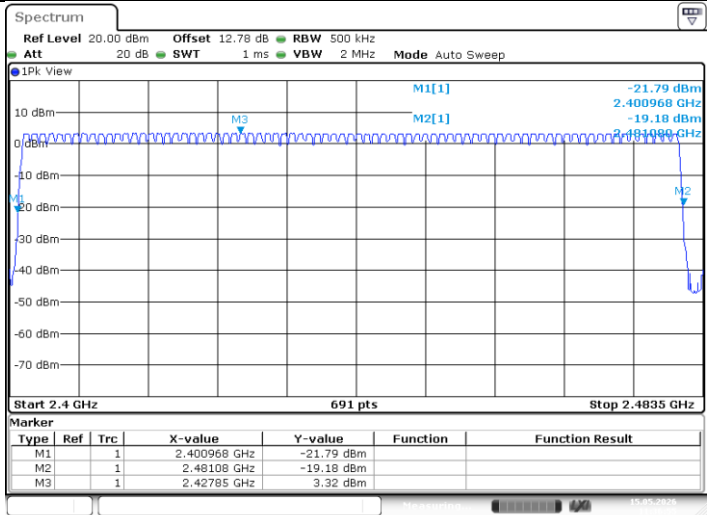


ProjectNo.:2604T13671E-RF Tester:Cayde Hou
Date: 15.MAY.2026 11:36:56

2DH1_Ant1_Hop

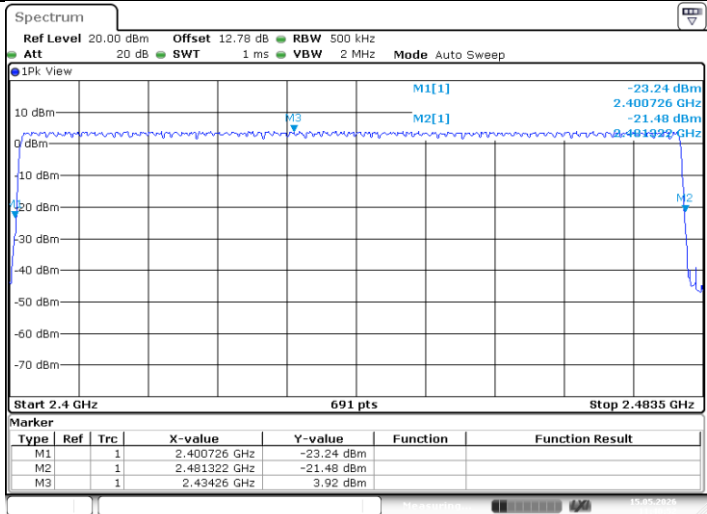

ProjectNo.:2604T13671E-RF Tester:Cayde Hou
Date: 15.MAY.2026 11:40:52

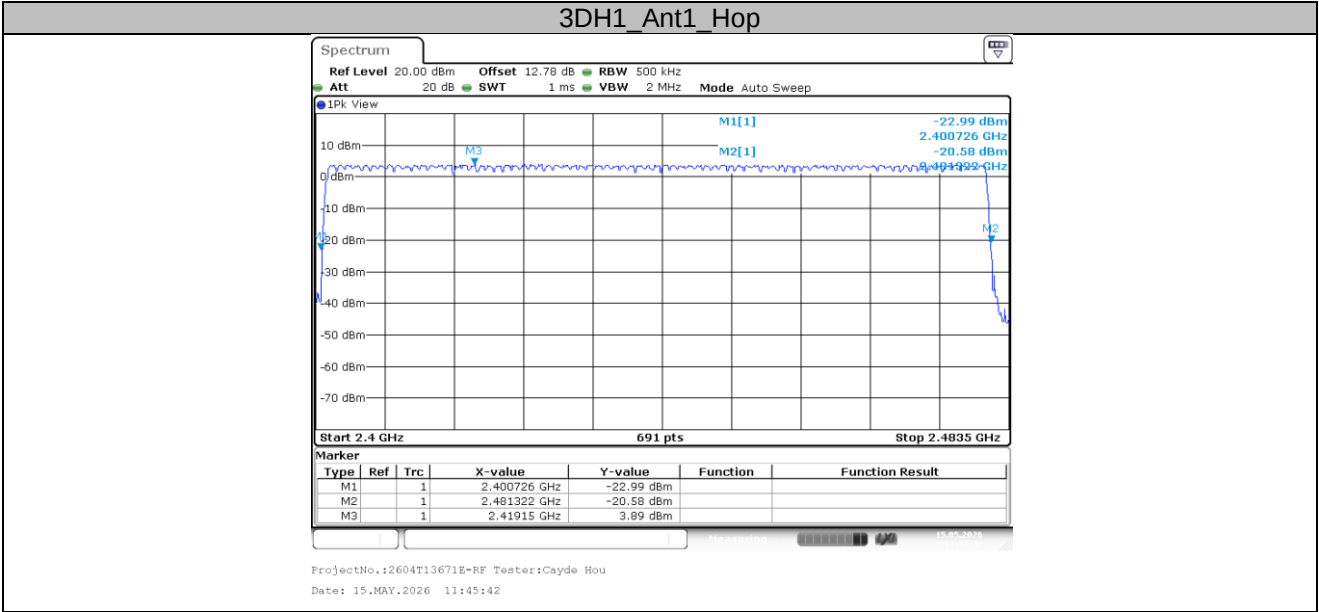


Appendix D: Hopping Frequency Separation

Test Result

Test Mode	Antenna	Freq.[MHz]	Result [MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.003	0.100	PASS
2DH1	Ant1	Hop	1.003	0.100	PASS
3DH1	Ant1	Hop	1.003	0.100	PASS

Test Graphs



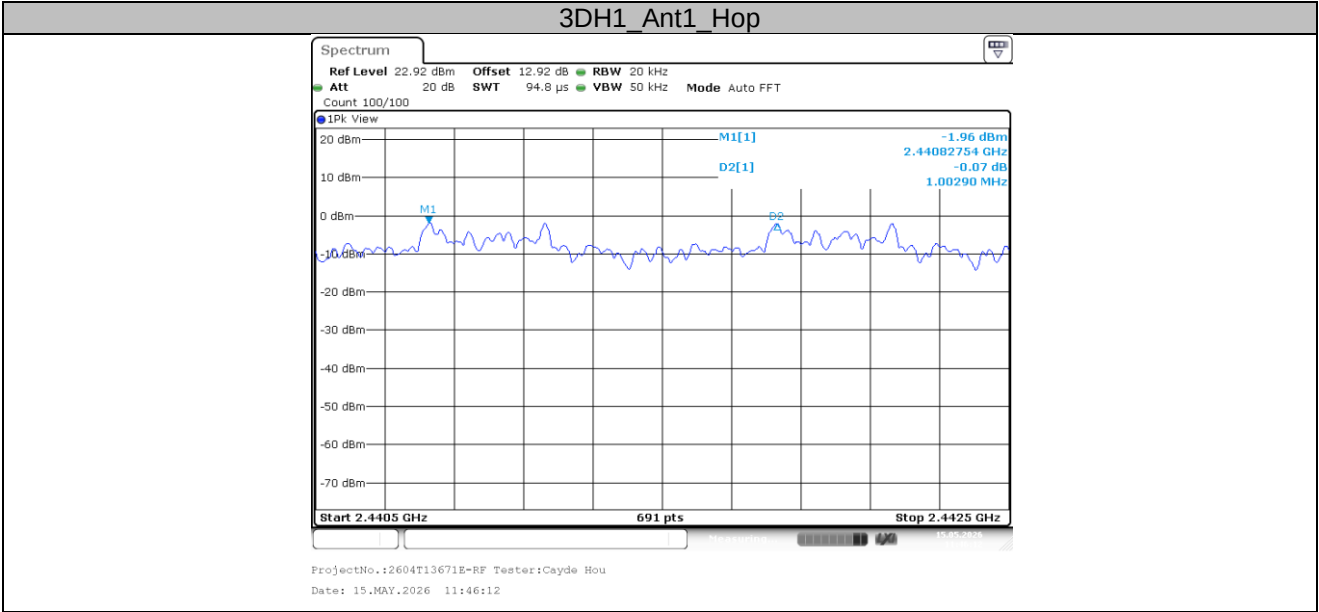


Appendix E: Transmitter Unwanted Emissions In The Out-Of-Band Domain**Test Result**


Test Mode	Antenna	Freq.[MHz]	Freq.[MHz]	Level[dBm/MHz]	Limit[dBm/MHz]	Verdict
DH1	Ant1	Hop	2398.5	-52.54	-20.00	PASS
			2399.5	-61.43	-10.00	PASS
			2484	-52.48	-10.00	PASS
			2485	-51.51	-20.00	PASS
2DH1	Ant1	Hop	2398.182	-50.66	-20.00	PASS
			2398.341	-62.10	-20.00	PASS
			2399.341	-52.46	-10.00	PASS
			2399.5	-60.89	-10.00	PASS
			2484	-51.96	-10.00	PASS
			2484.159	-51.92	-10.00	PASS
			2485.159	-61.32	-20.00	PASS
			2485.318	-61.92	-20.00	PASS
3DH1	Ant1	Hop	2398.166	-49.12	-20.00	PASS
			2398.333	-50.45	-20.00	PASS
			2399.333	-60.88	-10.00	PASS
			2399.5	-61.25	-10.00	PASS
			2484	-50.96	-10.00	PASS
			2484.167	-51.05	-10.00	PASS
			2485.167	-52.72	-20.00	PASS
			2485.334	-50.93	-20.00	PASS

Note: The antenna gain is 3.35 dBi[#] and the test results are added.


Test Graphs

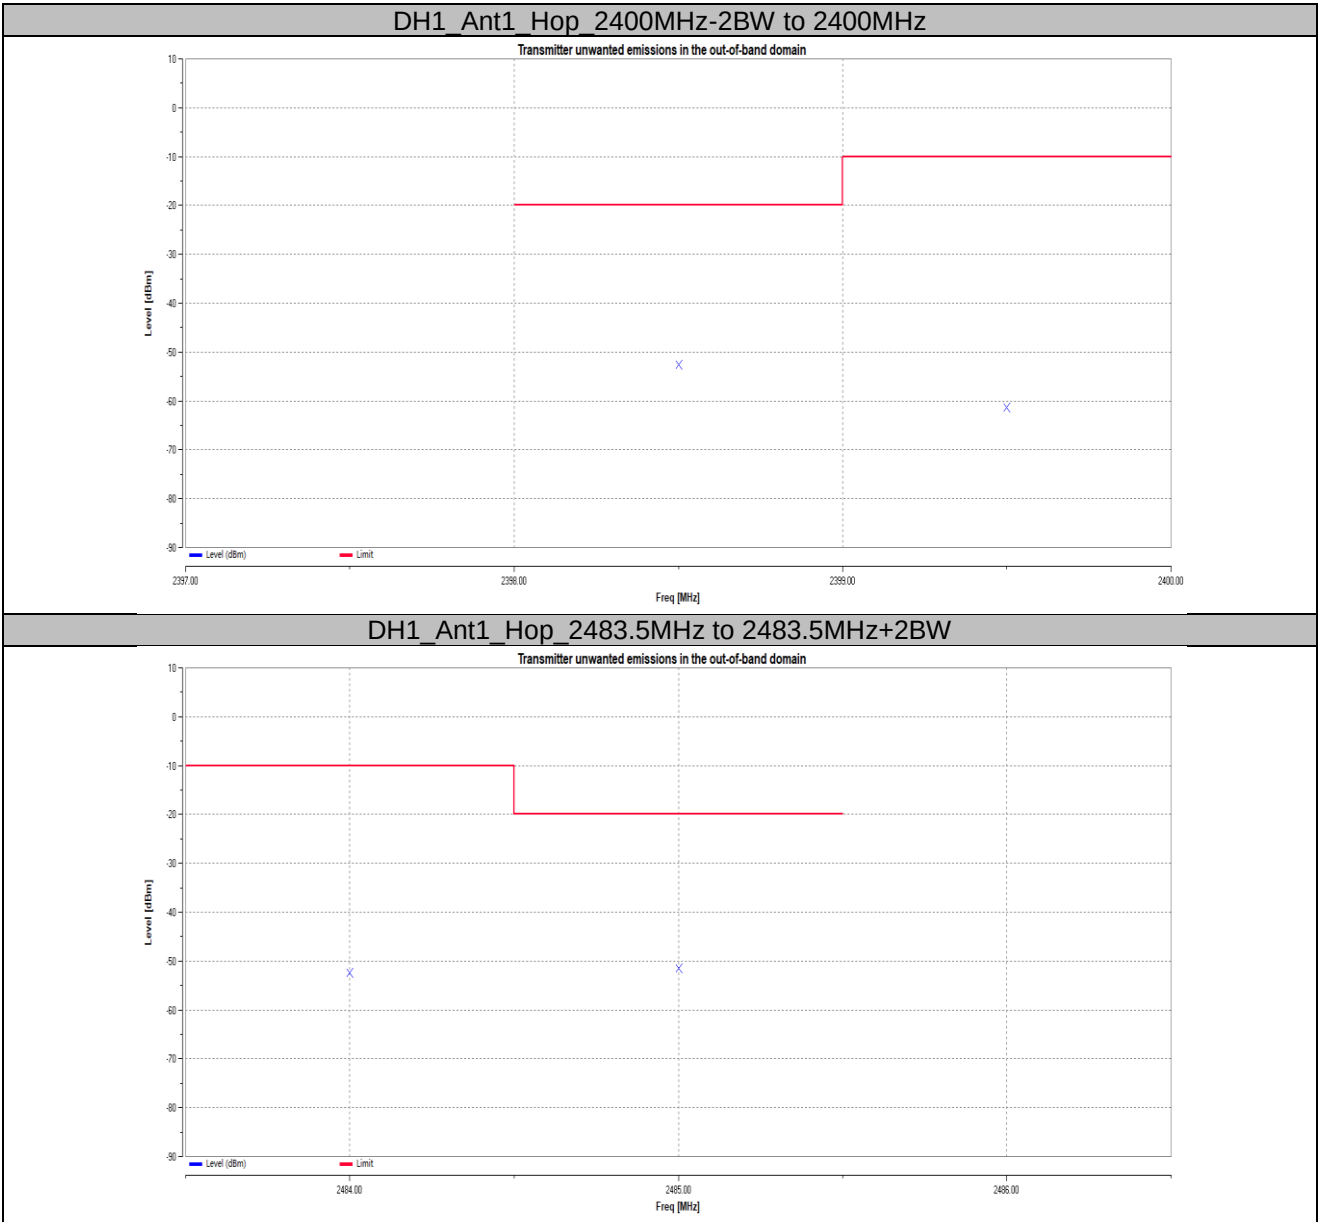


2DH1_Ant1_Hop_2400MHz-2BW to 2400MHz

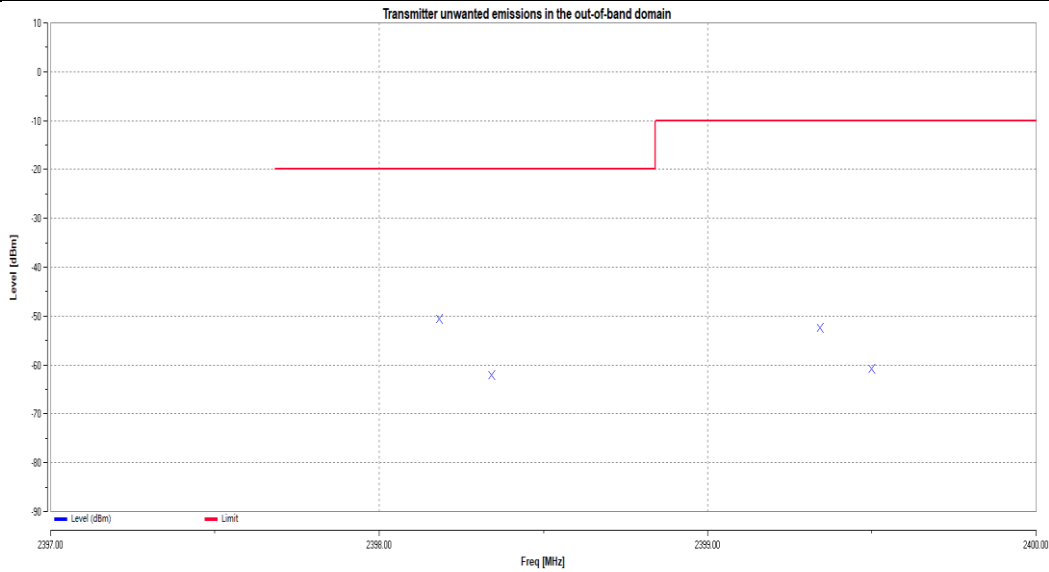


2DH1_Ant1_Hop_2483.5MHz to 2483.5MHz+2BW

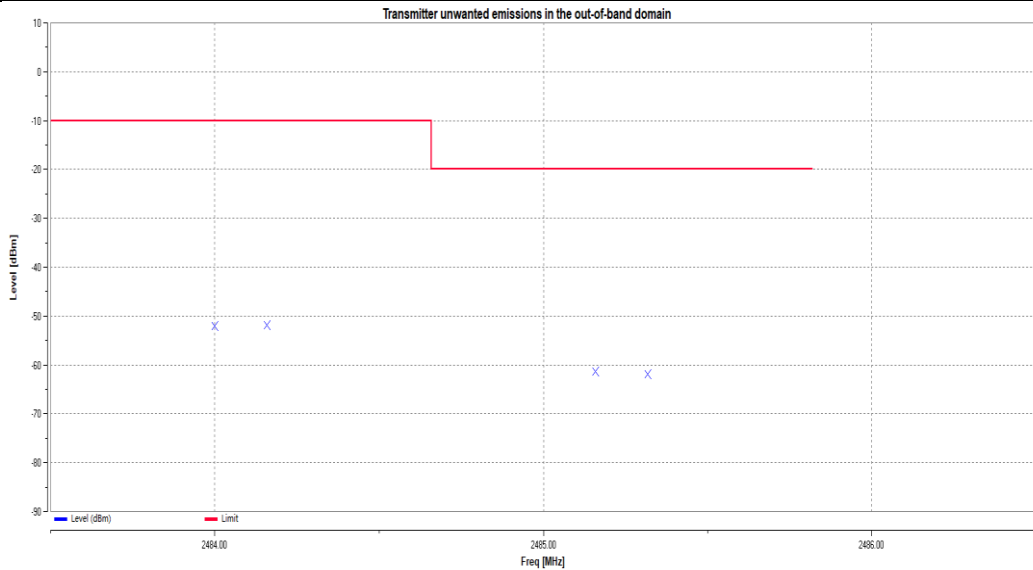

3DH1_Ant1_Hop_2400MHz-2BW to 2400MHz

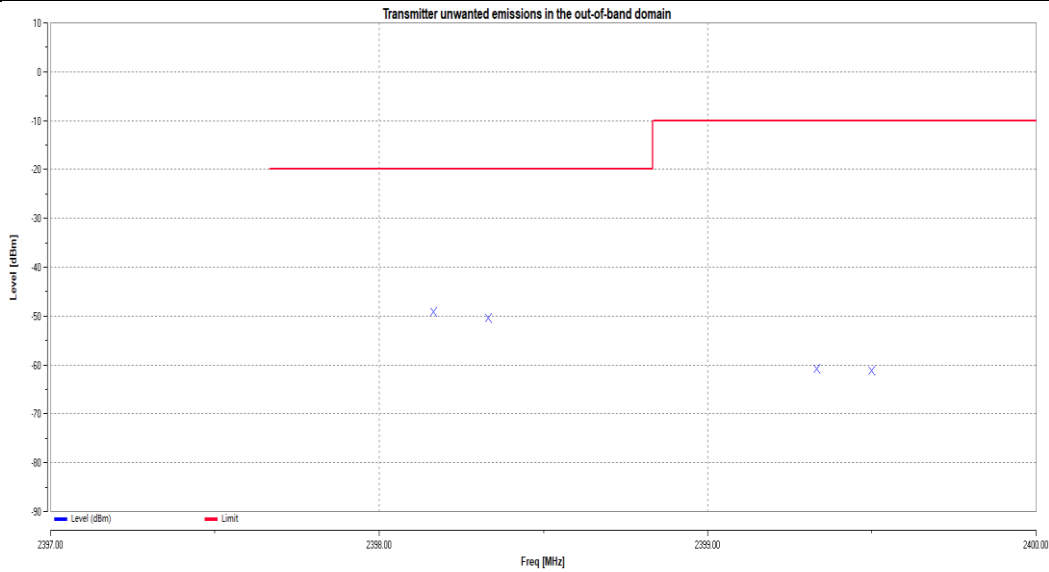

3DH1_Ant1_Hop_2483.5MHz to 2483.5MHz+2BW

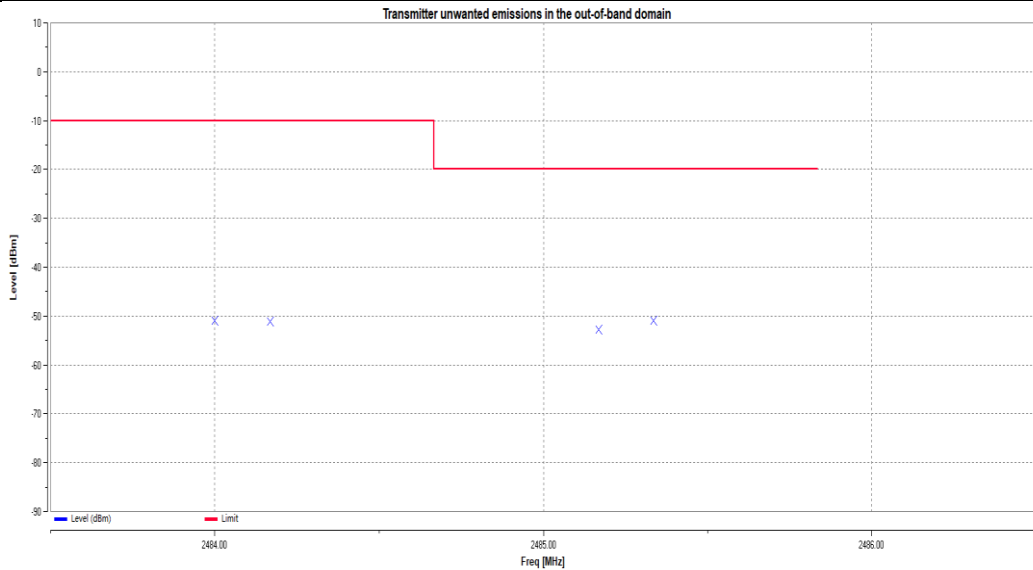


Appendix F: Receiver Blocking**Test Result**

Test Mode	Antenna	Freq. [MHz]	Wanted Signal [dBm]	Freq. [MHz]	CW [dBm]	PER[%]	Limit [%]	Verdict
DH1	Ant1	Hop	-66.32	2300	-30.65	0.00	≤10	PASS
			-66.32	2380	-30.65	0.20	≤10	PASS
			-66.34	2504	-30.65	0.00	≤10	PASS
			-66.34	2584	-30.65	0.00	≤10	PASS

Note1: The Maximum EIRP is 6.59dBm<10dBm and the EUT is an adaptive device,so it belongs to the receiver category 2.

Note 2:The antenna gain is 3.35 dBi[#] which was added into wanted signal and CW signal.

Test Graphs

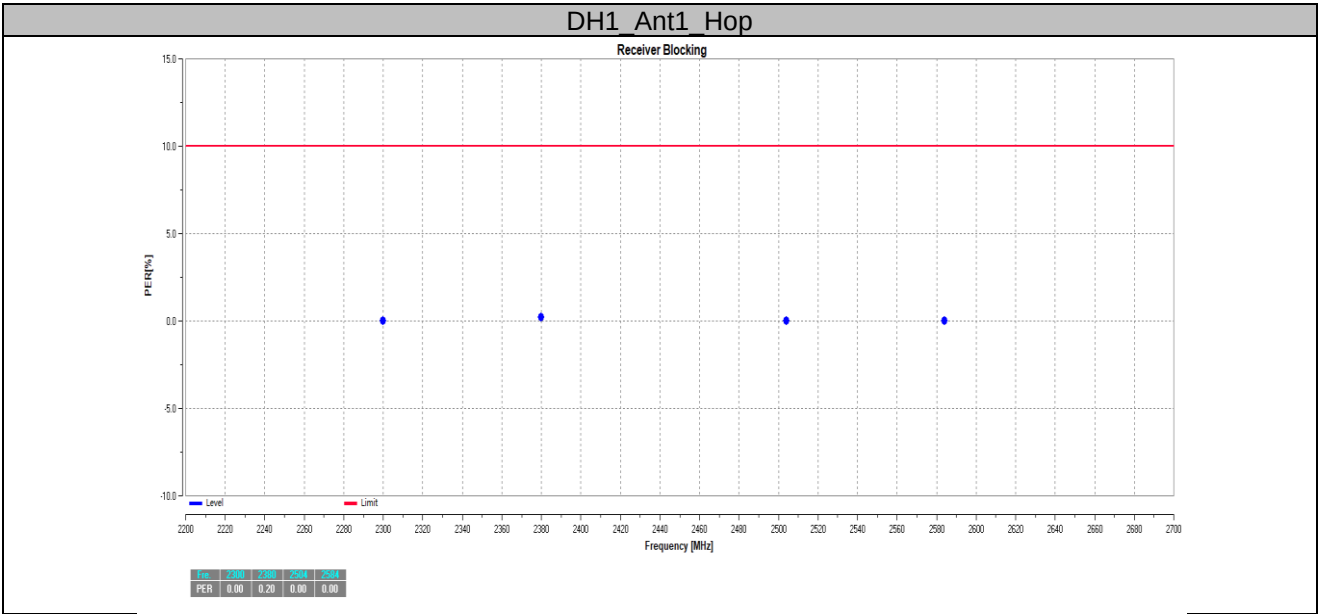

APPENDIX- RIGHT TEMPLE

Test Information:

Sample No.:	3LU7-3	Test Date:	2026/9/20
Test Site:	RF	Test Mode:	Transmitting/ Receiving
Tester:	Yueheng Tang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2	Relative Humidity: (%)	48	ATM Pressure: (kPa)	99.2
----------------------	------	------------------------------	----	------------------------	------

Appendix A: RF Output Power**Test Result**


Test Condition	Test Mode	Antenna	Freq.(MHz)	EIRP[dBm]	Limit[dBm]	Verdict
NTNV	DH1	Ant1	Hop	6.55	20	PASS
	2DH1	Ant1	Hop	6.44	20	PASS
	3DH1	Ant1	Hop	6.47	20	PASS
LTVN	DH1	Ant1	Hop	6.28	20	PASS
	2DH1	Ant1	Hop	6.40	20	PASS
	3DH1	Ant1	Hop	6.31	20	PASS
HTNV	DH1	Ant1	Hop	6.49	20	PASS
	2DH1	Ant1	Hop	6.48	20	PASS
	3DH1	Ant1	Hop	6.21	20	PASS

Note:The antenna gain is 3.35 dBi[#] which was added into the EIRP.


Appendix B: Occupied Channel Bandwidth**Test Result**

Test Mode	Antenna	Freq.[MHz]	OCB[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.861	2401.5704	2402.4316	2400 to 2483.5	PASS
		2480	0.855	2479.5744	2480.4296	2400 to 2483.5	PASS
2DH1	Ant1	2402	1.157	2401.4086	2402.5654	2400 to 2483.5	PASS
		2480	1.157	2479.4086	2480.5654	2400 to 2483.5	PASS
3DH1	Ant1	2402	1.163	2401.4226	2402.5854	2400 to 2483.5	PASS
		2480	1.165	2479.4226	2480.5874	2400 to 2483.5	PASS

Test Graphs

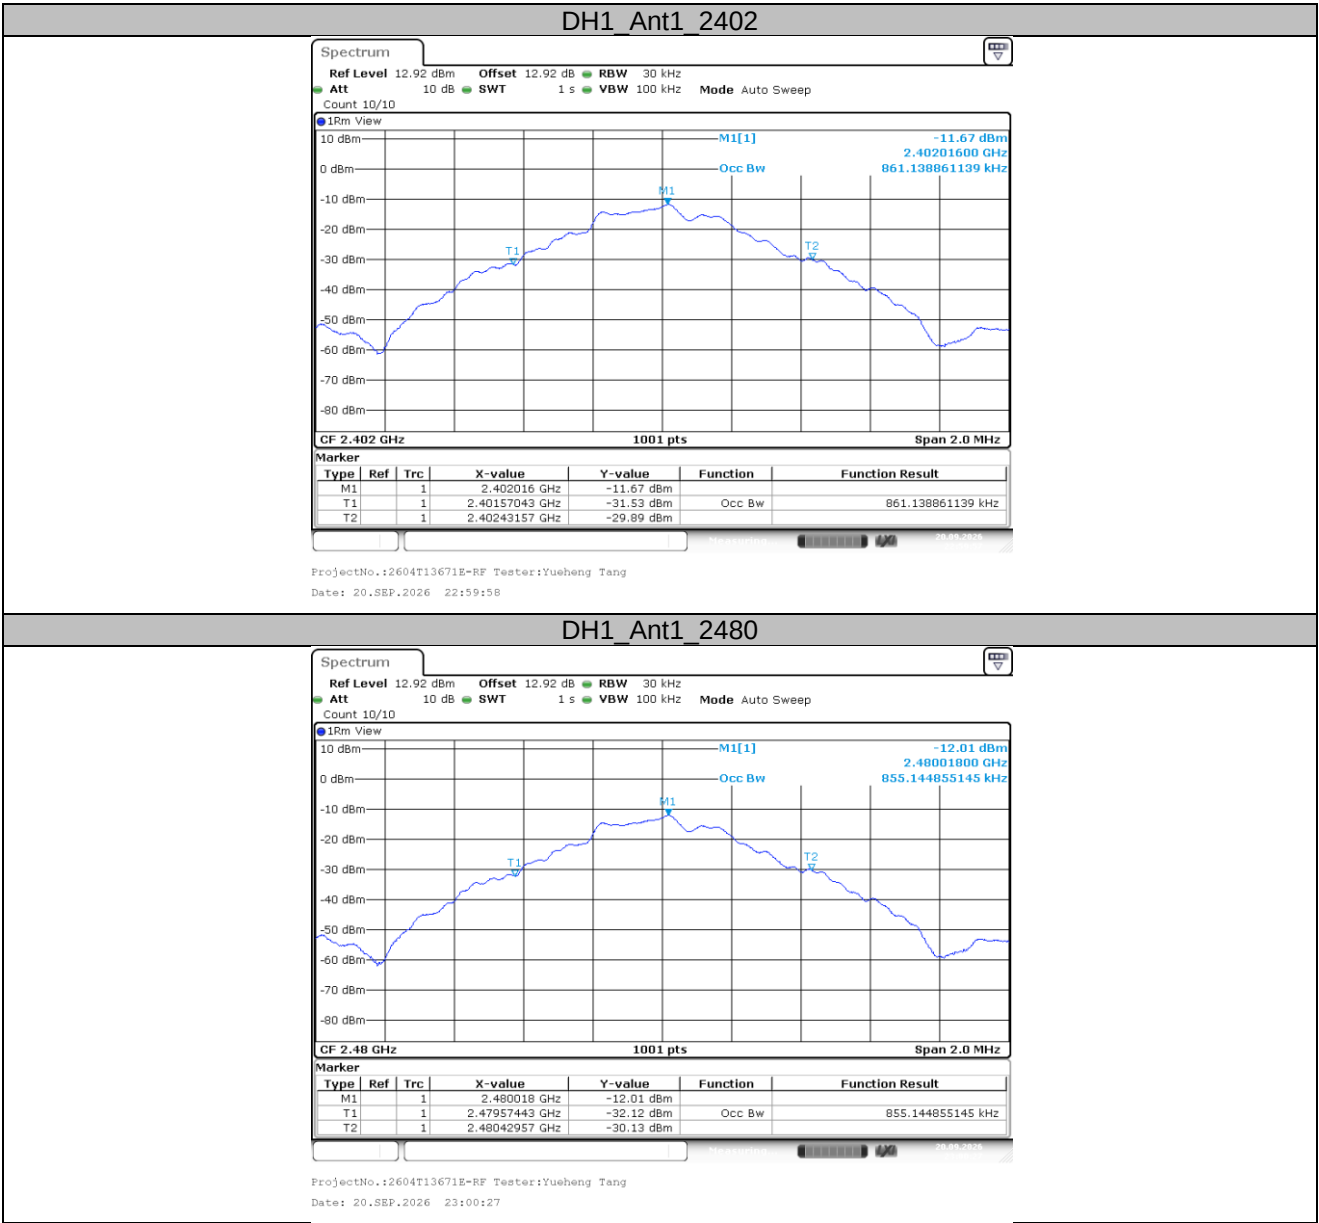


2DH1_Ant1_2402

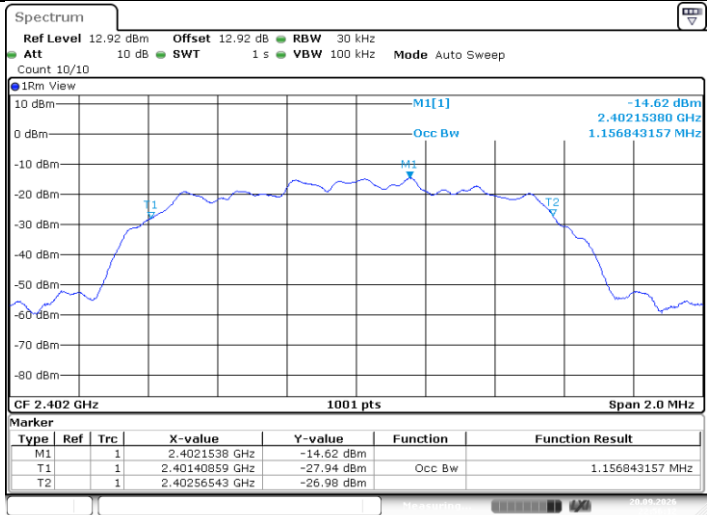


ProjectNo.:2604T13671E-RF Tester:Yueheng Tang
Date: 20.SEP.2026 22:56:13

2DH1_Ant1_2480

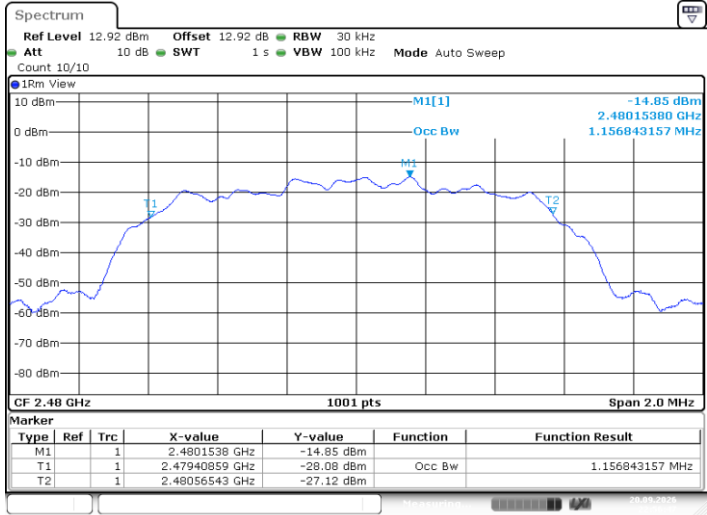


ProjectNo.:2604T13671E-RF Tester:Yueheng Tang
Date: 20.SEP.2026 22:56:47

3DH1_Ant1_2402

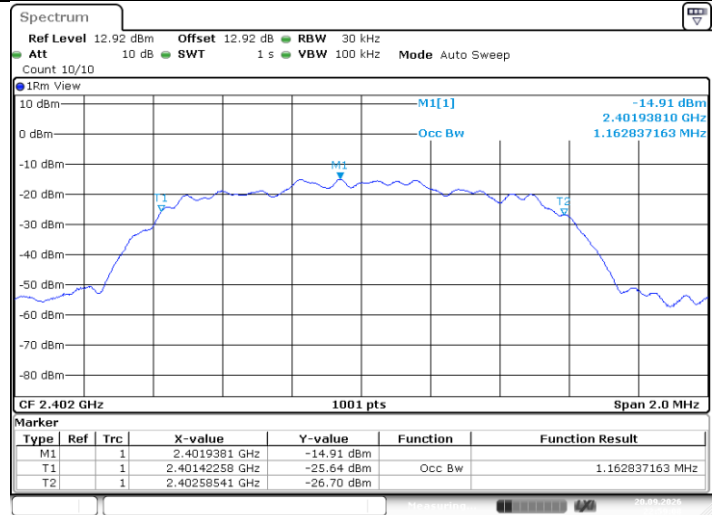

ProjectNo.:2604T13671E-RF Tester:Yueheng Tang
Date: 20.SEP.2026 22:59:09

3DH1_Ant1_2480

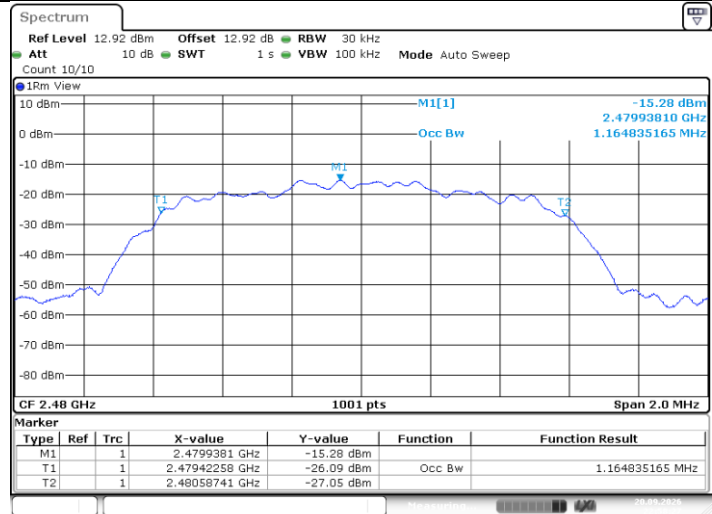

ProjectNo.:2604T13671E-RF Tester:Yueheng Tang
Date: 20.SEP.2026 22:58:27

Appendix C: Accumulated Transmit Time, Frequency Occupation and Hopping Sequence

Test Result

Note:For Accumulated Transmit time and Maximum Frequency Occupation,pre-scan GFSK, $\pi/4$ DQPSK, 8DPSK mode,the worse case 8DPSK is recorded.

Accumulated Transmit Time

Test Mode	Antenna	Freq.[MHz]	Result [ms]	Limit[ms]	Verdict
3DH5	Ant1	Hop_2402	398.147	400	PASS
		Hop_2480	356.015	400	PASS


Frequency Occupation


Test Mode	Antenna	Freq.[MHz]	Result [Num.]	Limit[Num.]	Verdict
3DH5	Ant1	Hop_2402	4	1	PASS
		Hop_2480	1	1	PASS


Hopping Sequence

Test Mode	Antenna	Freq.[MHz]	Hop. [Num.]	Limit[Num.]	Band Use[%]	Limit [%]	Verdict
DH1	Ant1	Hop	79	15	95.94	70	PASS
2DH1	Ant1	Hop	79	15	96.52	70	PASS
3DH1	Ant1	Hop	79	15	96.52	70	PASS


Test Graphs

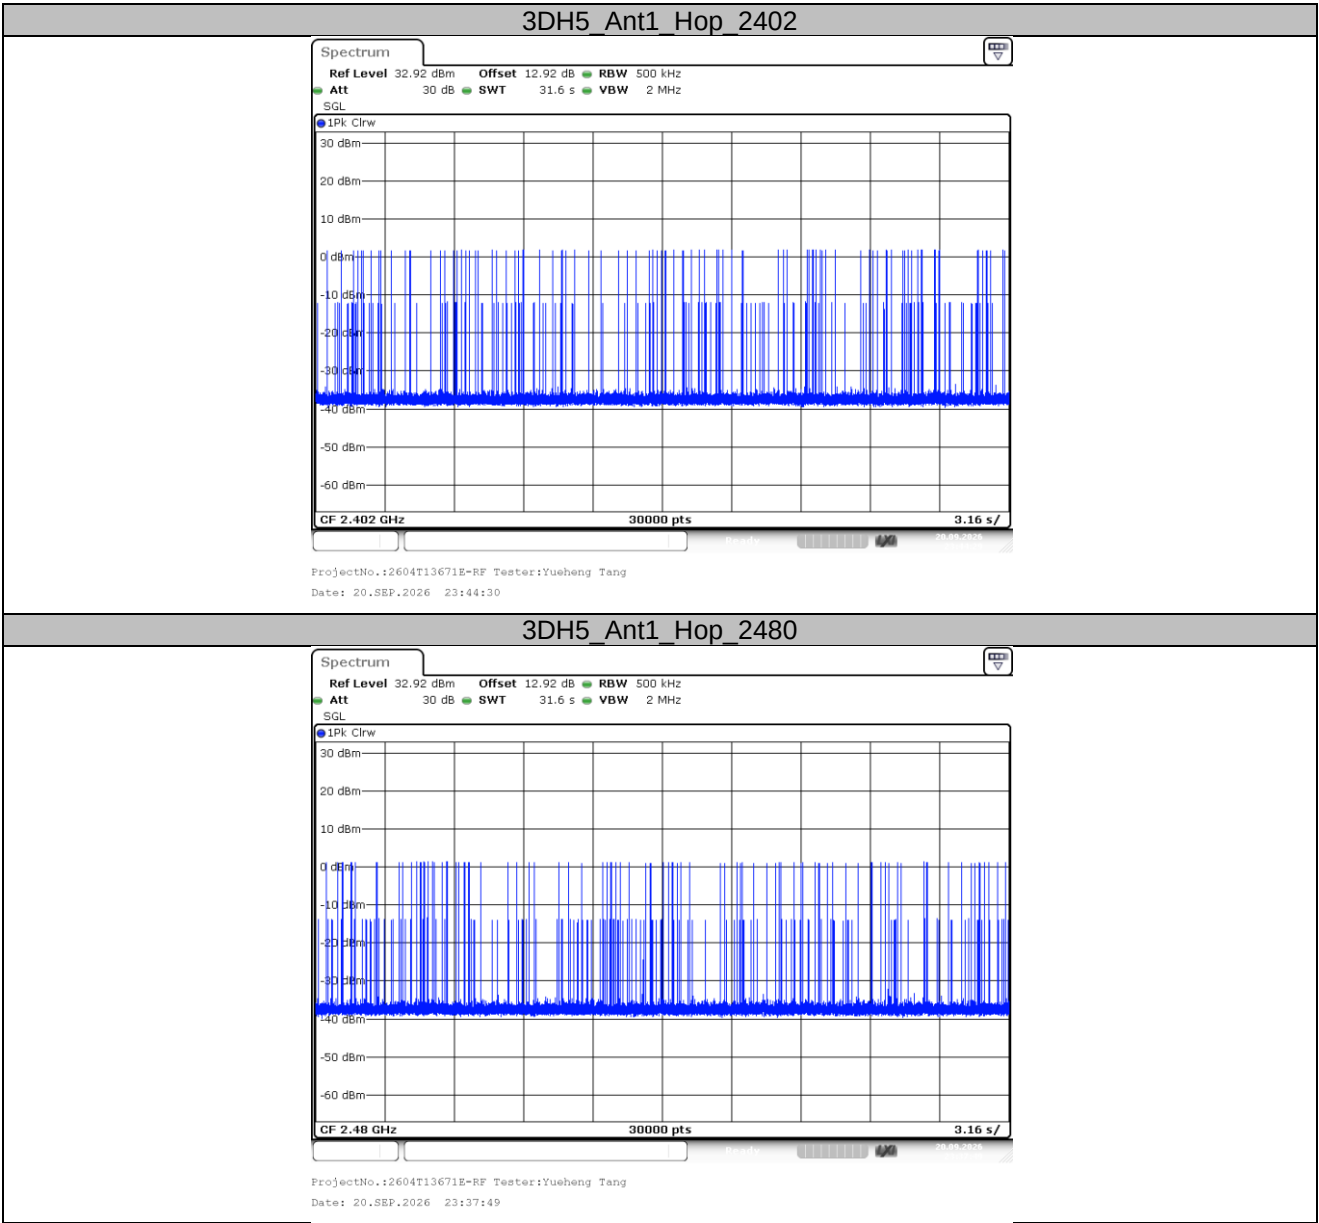

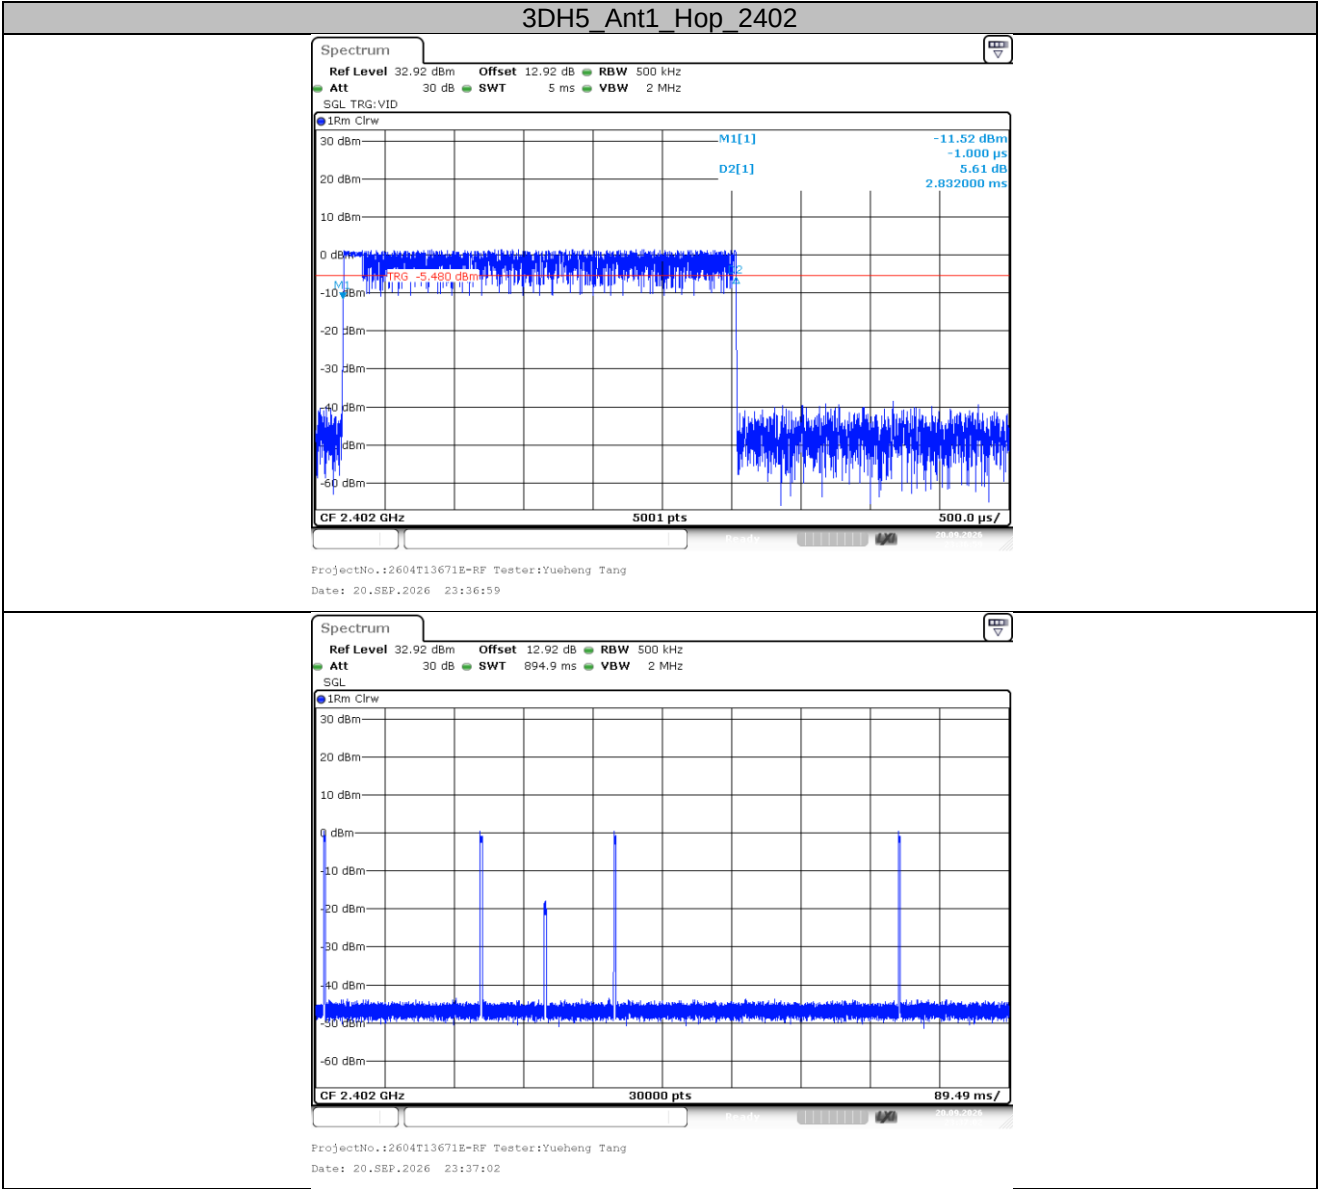

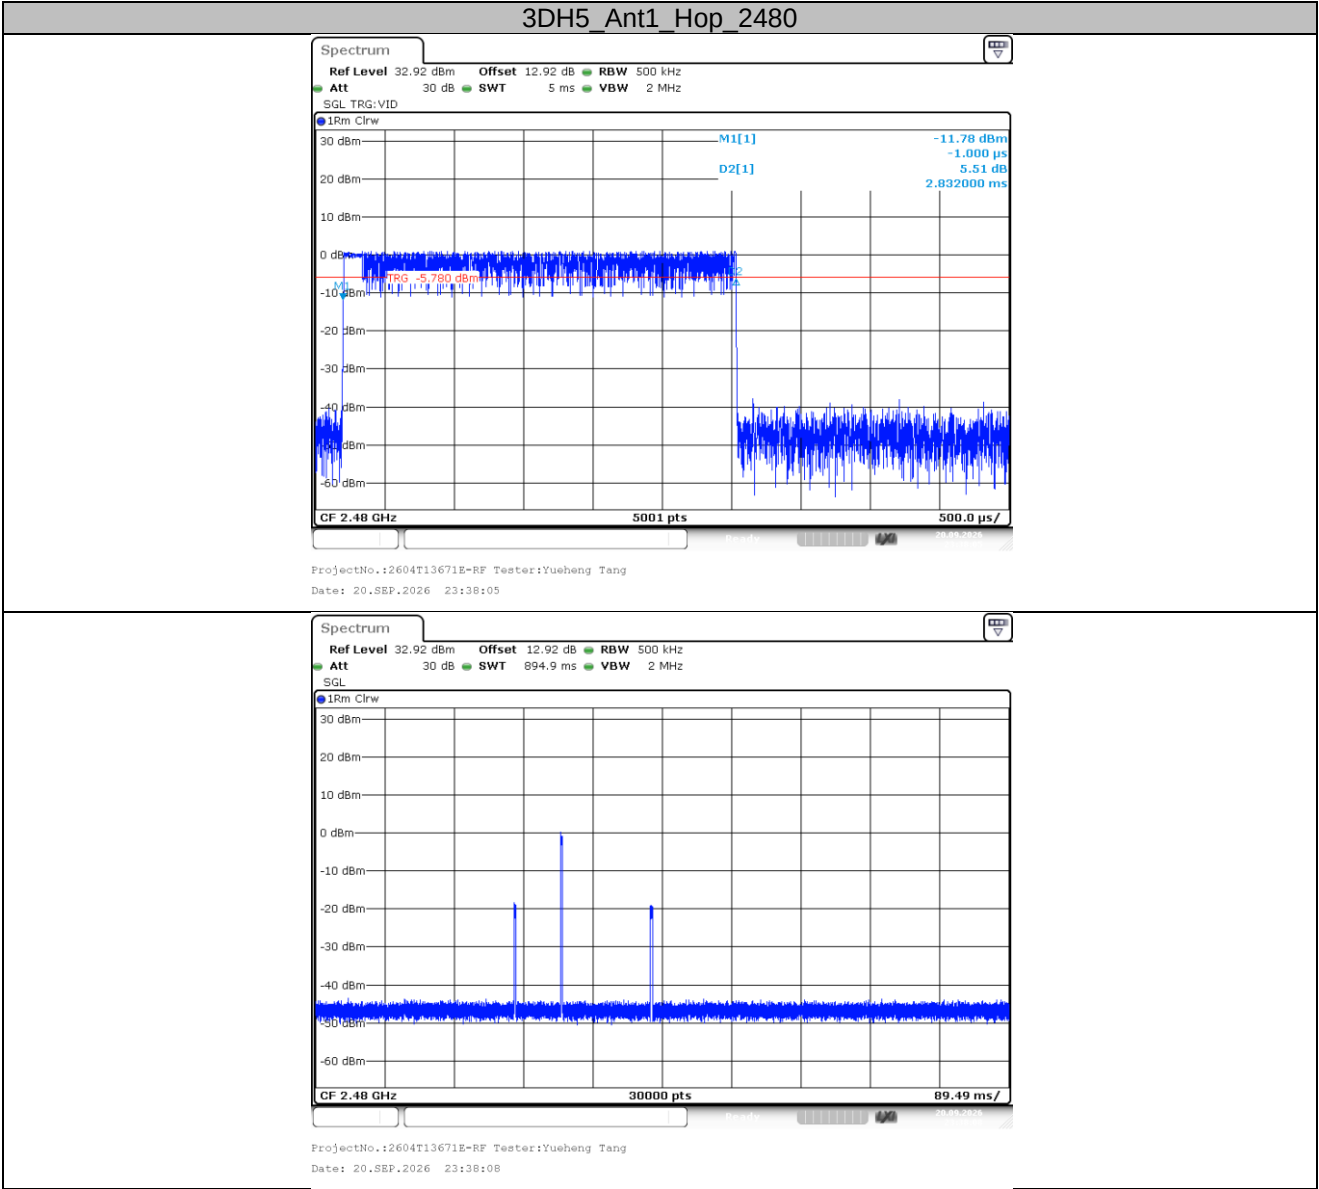


DH1_Ant1_Hop

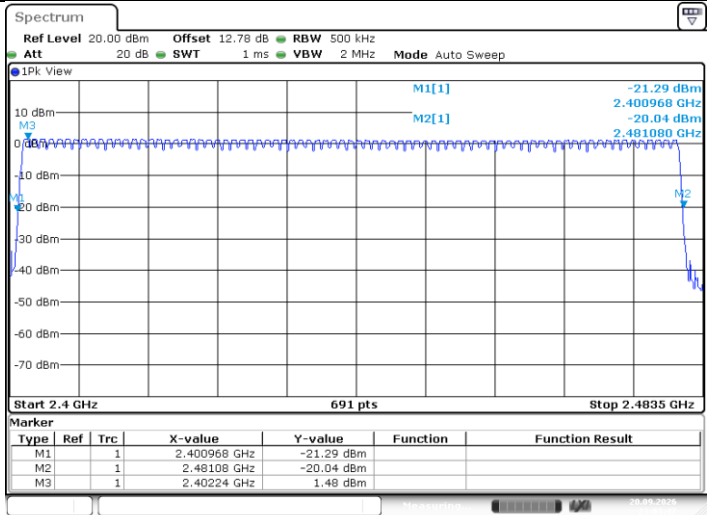


ProjectNo.:2604T13671E-RF Tester:Yueheng Tang
Date: 20.SEP.2026 23:03:48

2DH1_Ant1_Hop

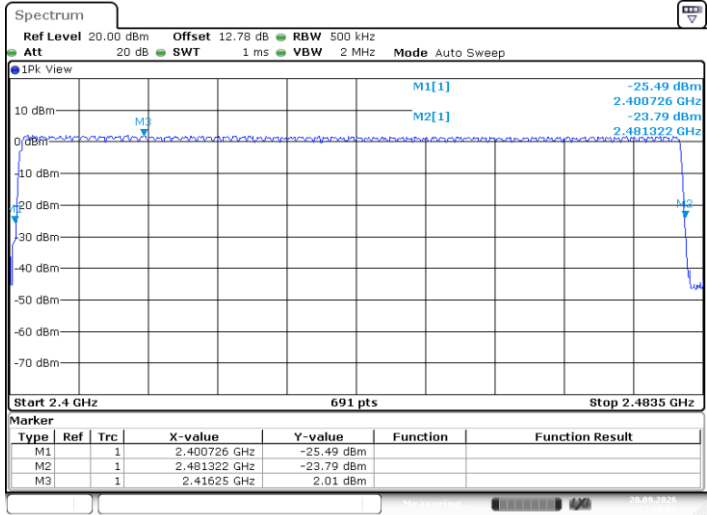

ProjectNo.:2604T13671E-RF Tester:Yueheng Tang
Date: 20.SEP.2026 23:08:03

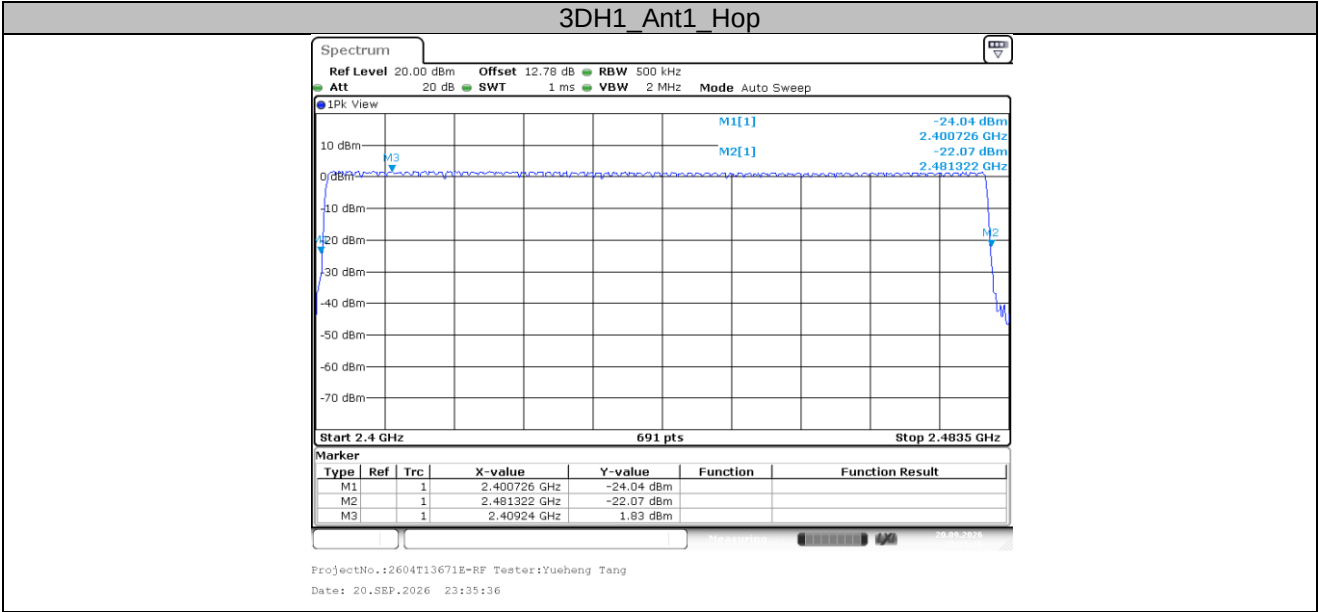


Appendix D: Hopping Frequency Separation

Test Result

Test Mode	Antenna	Freq.[MHz]	Result [MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.003	0.100	PASS
2DH1	Ant1	Hop	1.003	0.100	PASS
3DH1	Ant1	Hop	1.003	0.100	PASS

Test Graphs



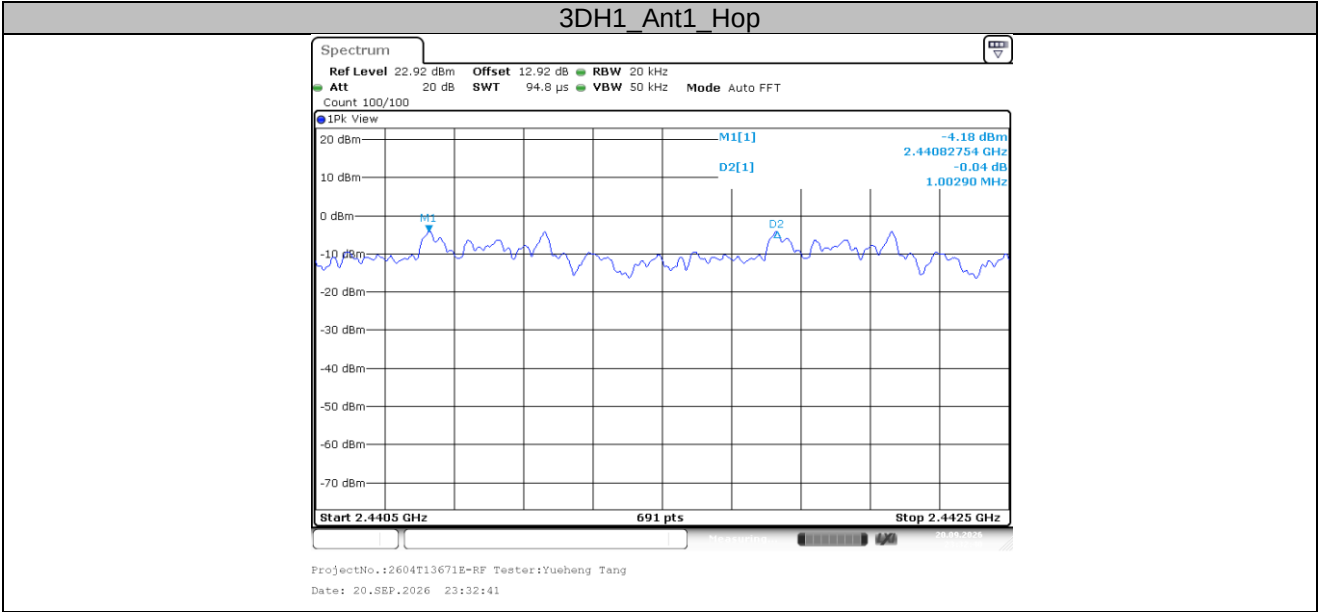


Appendix E: Transmitter Unwanted Emissions In The Out-Of-Band Domain**Test Result**


Test Mode	Antenna	Freq.[MHz]	Freq.[MHz]	Level[dBm/MHz]	Limit[dBm/MHz]	Verdict
DH1	Ant1	Hop	2398.5	-61.97	-20.00	PASS
			2399.5	-61.52	-10.00	PASS
			2484	-51.39	-10.00	PASS
			2485	-54.01	-20.00	PASS
2DH1	Ant1	Hop	2398.186	-52.08	-20.00	PASS
			2398.343	-62.81	-20.00	PASS
			2399.343	-61.86	-10.00	PASS
			2399.5	-62.09	-10.00	PASS
			2484	-52.85	-10.00	PASS
			2484.157	-53.54	-10.00	PASS
			2485.157	-53.61	-20.00	PASS
			2485.314	-53.24	-20.00	PASS
3DH1	Ant1	Hop	2398.17	-51.15	-20.00	PASS
			2398.335	-60.74	-20.00	PASS
			2399.335	-61.23	-10.00	PASS
			2399.5	-48.07	-10.00	PASS
			2484	-52.68	-10.00	PASS
			2484.165	-52.15	-10.00	PASS
			2485.165	-62.76	-20.00	PASS
			2485.33	-63.57	-20.00	PASS

Note: The antenna gain is 3.35 dBi[#] and the test results are added.


Test Graphs

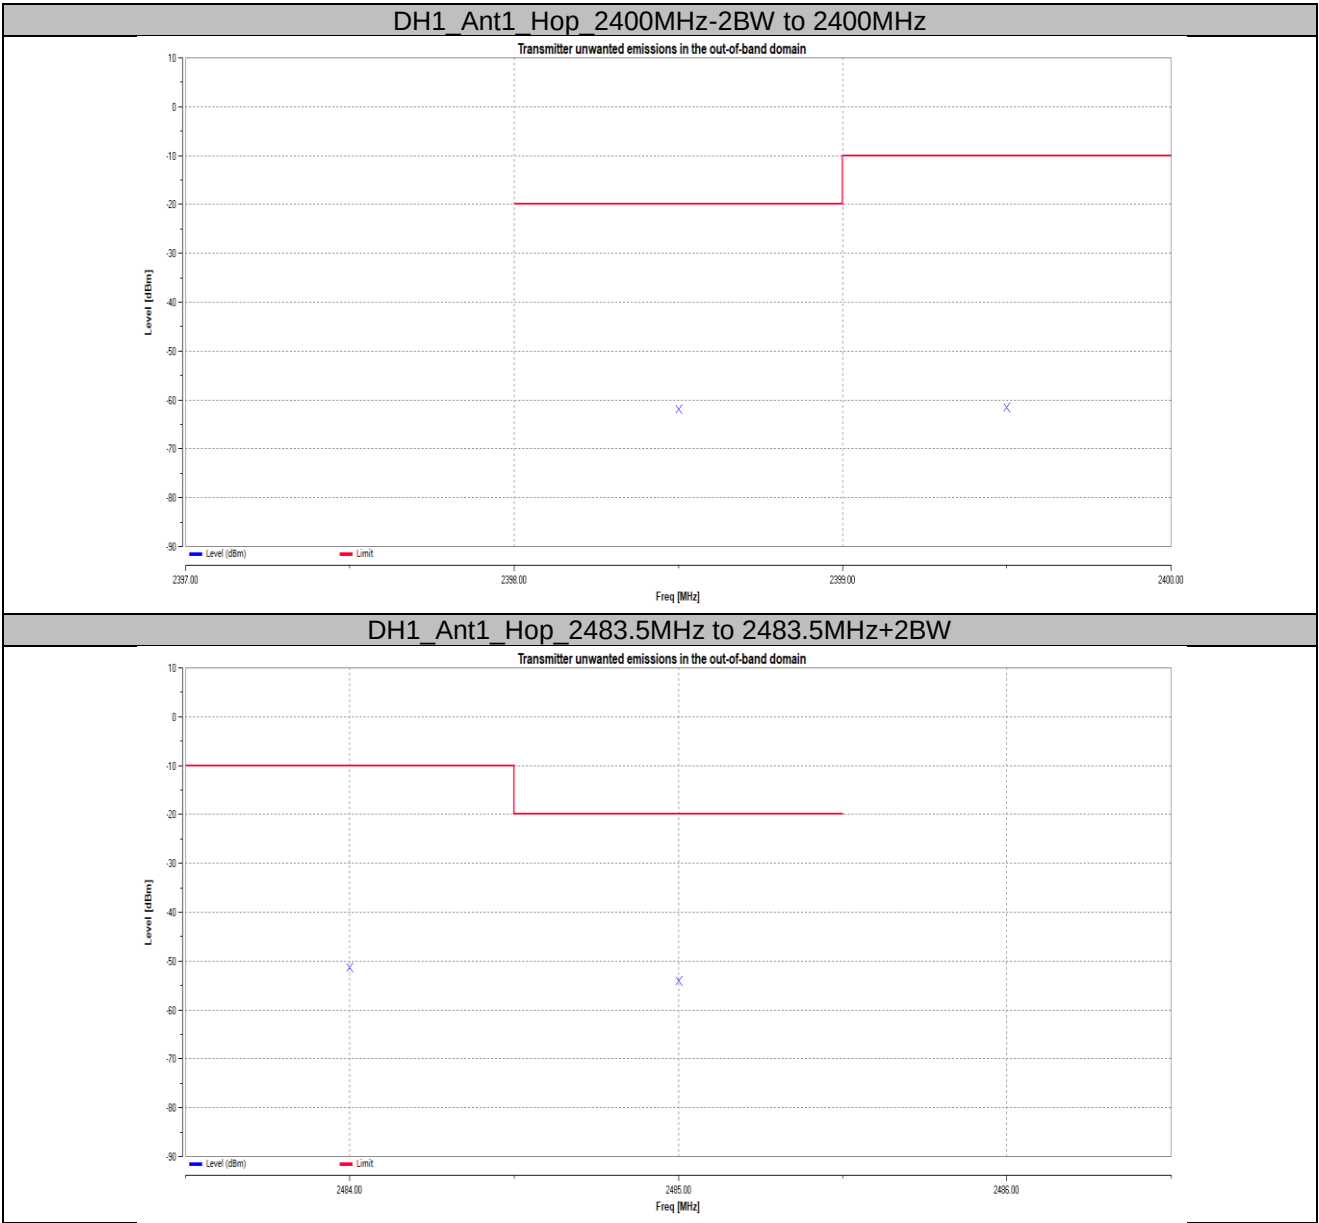


2DH1_Ant1_Hop_2400MHz-2BW to 2400MHz

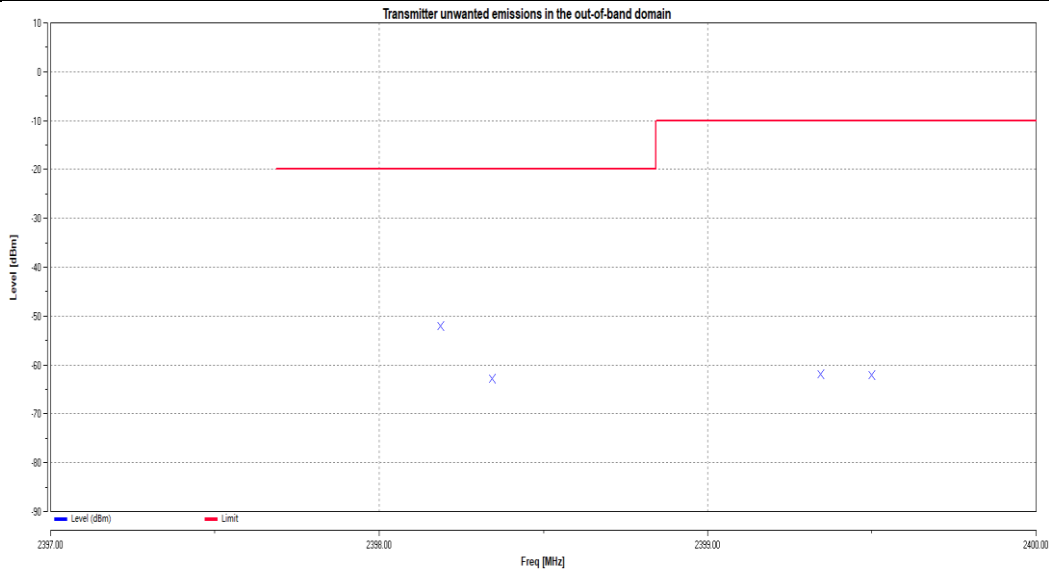


2DH1_Ant1_Hop_2483.5MHz to 2483.5MHz+2BW

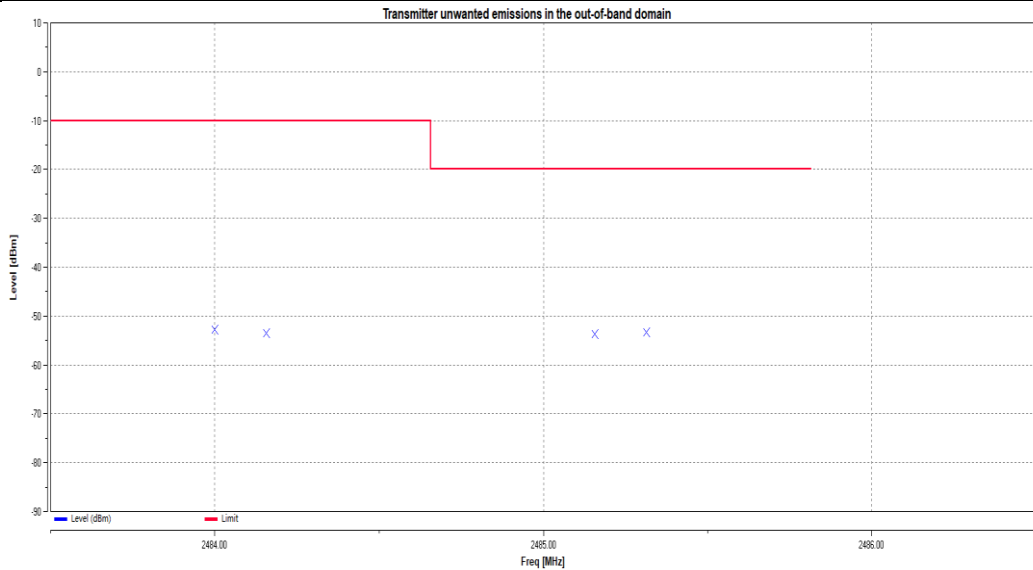

3DH1_Ant1_Hop_2400MHz-2BW to 2400MHz

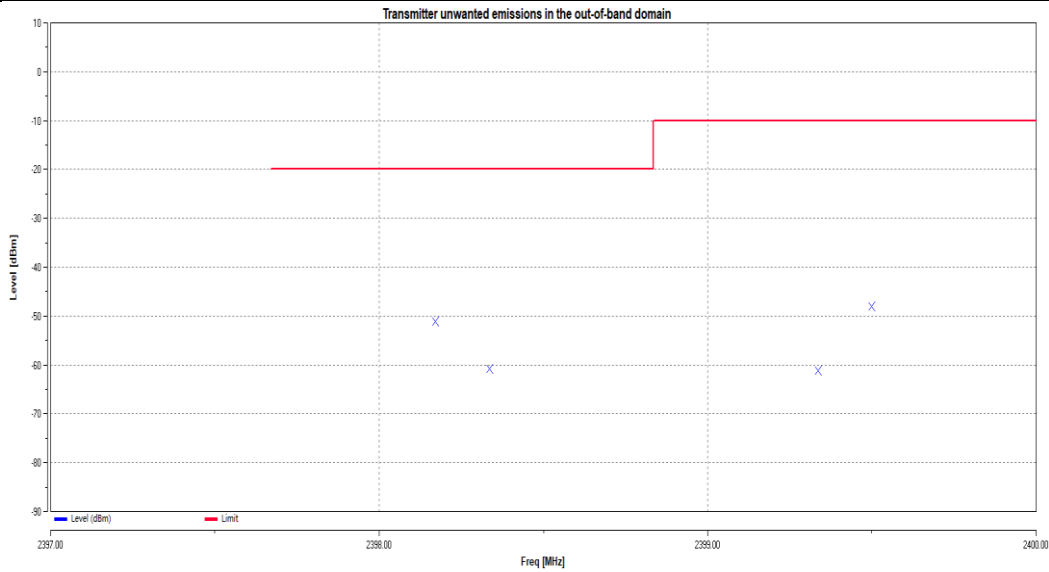

3DH1_Ant1_Hop_2483.5MHz to 2483.5MHz+2BW

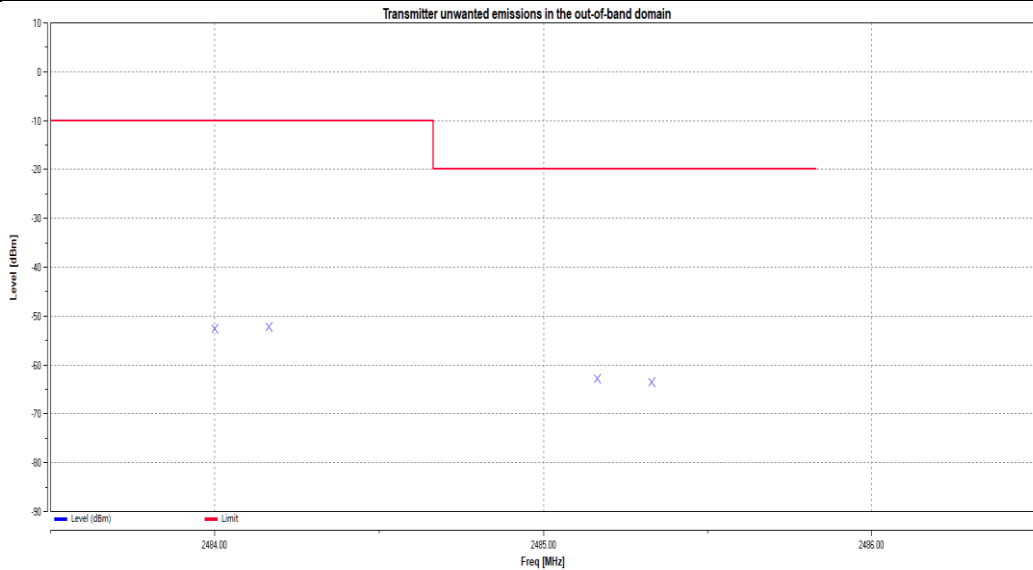

Appendix F: Receiver Blocking**Test Result**

Test Mode	Antenna	Freq. [MHz]	Wanted Signal [dBm]	Freq. [MHz]	CW [dBm]	PER[%]	Limit [%]	Verdict
DH1	Ant1	Hop	-66.30	2300	-30.65	0.50	≤10	PASS
			-66.30	2380	-30.65	0.60	≤10	PASS
			-66.33	2504	-30.65	0.80	≤10	PASS
			-66.33	2584	-30.65	0.70	≤10	PASS

Note:The Maximum EIRP is 6.55dBm<10dBm and the EUT is an adaptive device,so it belongs to the receiver category 2.

Note:The antenna gain is 3.35 dBi[#] which was added into wanted signal and CW signal.

Test Graphs

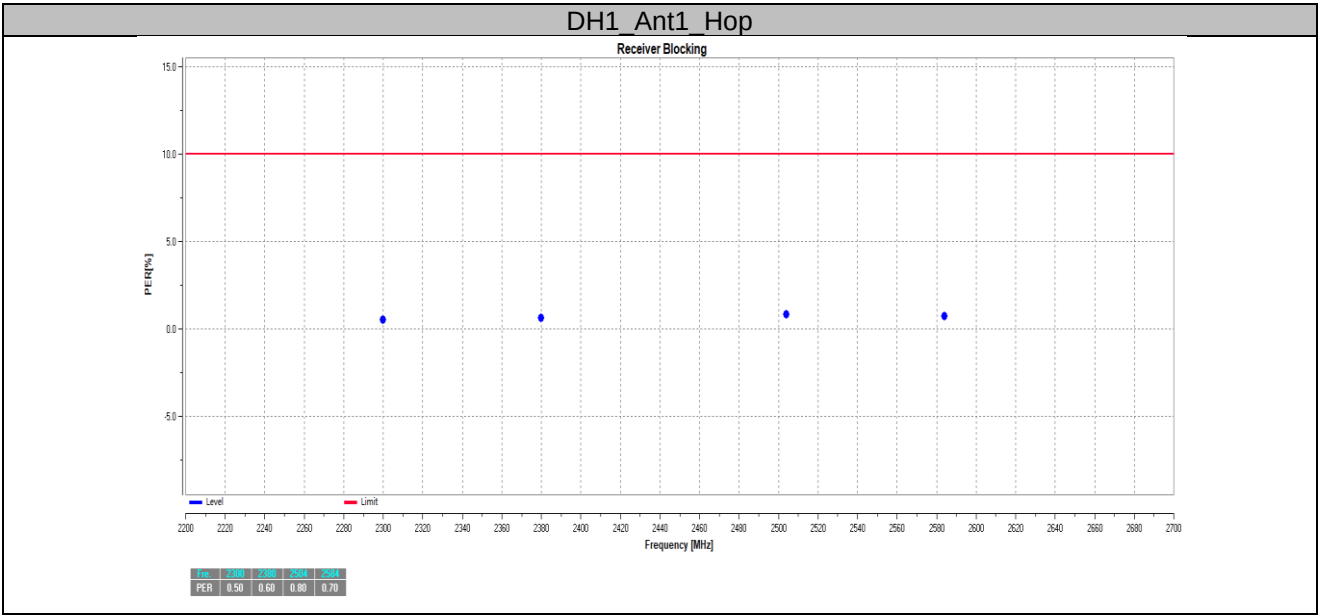


**EXHIBIT A-E.2 INFORMATION AS REQUIRED BY EN 300 328 V2.2.2,
CLAUSE 5.4.1**

In accordance with ETSI EN 300 328, clause 5.4.1, the following information is provided by the manufacturer.

a) The type of modulation used by the equipment:

- ☒ FHSS
☐ non-FHSS

b) In case of FHSS:

- In case of non-Adaptive FHSS equipment:
The number of Hopping Frequencies: _____.
- In case of Adaptive FHSS equipment:
The maximum number of Hopping Frequencies: 79 ;
The minimum number of Hopping Frequencies: 79 ;
- The (average) dwell time: Left temple: 2.888 ms, Right temple: 2.832 ms ;

c) Adaptive/non-adaptive equipment:

- ☐ non-adaptive Equipment
☒ adaptive Equipment without the possibility to switch to a non-adaptive mode
☐ adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

The maximum Channel Occupancy Time implemented by the equipment: _____ms

- ☐ The equipment has implemented an LBT mechanism
- In case of non-FHSS equipment:
 - ☐ The equipment is Frame Based equipment
 - ☐ The equipment is Load Based equipment
 - ☐ The equipment can switch dynamically between Frame Based and Load Based equipment
- The CCA time implemented by the equipment: _____ μ s
- ☐ The equipment has implemented a DAA mechanism
- ☐ The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

The maximum RF Output Power (e.i.r.p.): _____dBm

The maximum (corresponding) Duty Cycle: _____ %

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

_____.

f) The worst case operational mode for each of the following tests:

- RF Output Power Left temple: 6.59 dBm, Right temple: 6.55 dBm;
- Power Spectral Density N/A;
- Duty cycle, Tx-Sequence, Tx-gap N/A;
- Accumulated Transmit Time, Minimum Frequency Occupation & Hopping Sequence
(only for FHSS equipment) Left temple: 390.774ms, 2, 79,
Right temple: 398.147 ms, 1, 79;
- Hopping Frequency Separation (only for FHSS equipment) 1MHz;
- Medium Utilisation N/A;
- Adaptivity N/A;
& Receiver Blocking Pass;
- Nominal Channel Bandwidth 1MHz;
- Transmitter unwanted emissions in the OOB domain Left temple: -49.12 dBm/MHz
Right temple: -51.15 dBm/MHz;
- Transmitter unwanted emissions in the spurious domain Left temple: -69.09 dBm,
Right temple: -67.98 dBm;
- Receiver spurious emissions Left temple: -54.72 dBm, Right temple: -55.53 dBm;

g) The different transmit operating modes (tick all that apply):

- ☒ Operating mode 1: Single Antenna Equipment
 - ☒ Equipment with only one antenna
 - ☐ Equipment with two diversity antennas but only one antenna active at any moment in time
 - ☐ Smart Antenna Systems with two or more antennas, but operating in a (legacy) mode where only one antenna is used (e.g. IEEE 802.11™ legacy mode in smart antenna systems)
- ☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
 - ☐ Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ legacy mode)
 - ☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1
 - ☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2

NOTE 1: Add more lines if more channel bandwidths are supported.

- ☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
 - ☐ Single spatial stream / Standard throughput (e.g. IEEE 802.11™ legacy mode)
 - ☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1
 - ☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2

NOTE 2: Add more lines if more channel bandwidths are supported.

h) In case of Smart Antenna Systems:

- The number of Receive chains: _____;
- The number of Transmit chains: _____;
 - ☐ symmetrical power distribution
 - ☐ asymmetrical power distribution

In case of beam forming, the maximum beam forming gain: _____ dB;

NOTE: The additional beam forming gain does not include the basic gain of a single antenna.

i) Operating Frequency Range(s) of the equipment:

- Operating Frequency Range 1: 2402 MHz to 2480 MHz
- Operating Frequency Range 2: _____ MHz to _____ MHz

Note: Add more lines if more Frequency Ranges are supported.

j) Nominal Channel Bandwidth(s):

- Nominal Channel Bandwidth 1: 1 MHz
- Nominal Channel Bandwidth 2: _____ MHz
- Nominal Channel Bandwidth 3: _____ MHz

NOTE: Add more lines if more Frequency Ranges are supported.

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

- ☒ Stand-alone
- ☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
- ☐ Plug-in radio device (Equipment intended for a variety of host systems)
- ☐ Other _____;

l) The normal and the extreme operating conditions that apply to the equipment:**Normal operating conditions (if applicable):**

Operating temperature: +25 ° C

Other (please specify if applicable): _____

Extreme operating conditions:

Operating temperature range: Minimum: -10 ° C Maximum +45 ° C

Other (please specify if applicable): _____ Minimum: _____ Maximum _____

- Details provided are for the:
- ☒ stand-alone equipment
- ☐ combined equipment
- ☐ test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:

- Antenna Type:

- ☒ Integral Antenna (information to be provided in case of conducted measurements)

Antenna Gain: 3.35 dBi

If applicable, additional beamforming gain (excluding basic antenna gain): _____ dB

- ☐ Temporary RF connector provided
- ☐ No temporary RF connector provided

- ☐ Dedicated Antennas (equipment with antenna connector)
- ☐ Single power level with corresponding antenna(s)
- ☐ Multiple power settings and corresponding antenna(s)
- Number of different Power Levels: _____;
- Power Level 1: _____ dBm
- Power Level 2: _____ dBm
- Power Level 3: _____ dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

- For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable

Power Level 1: _____ dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name
1			
2			
3			
4			

NOTE 3: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 2: _____ dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name
1			
2			
3			
4			

NOTE 4: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 3: _____ dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name
1			
2			
3			
4			

NOTE 5: Add more rows in case more antenna assemblies are supported for this power level.

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the: ☒ stand-alone equipment
☐ combined equipment
☐ test jig

Supply Voltage ☐ AC mains State AC voltage _____V
☒ DC State DC voltage 3.8/5 V

In case of DC, indicate the type of power source

- ☐ Internal Power Supply
☒ External Power Supply or AC/DC adapter
☒ Battery
☐ Other: _____.

o) Describe the test modes available which can facilitate testing:

The measurements shall be performed during continuously transmitting.

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], IEEE 802.15.4™ [i.4], proprietary, etc.):
Bluetooth®.**q) If applicable, the statistical analysis referred to in clause 5.4.1 q)**

(to be provided as separate attachment)

r) If applicable, the statistical analysis referred to in clause 5.4.1 r)

(to be provided as separate attachment)

s) Geo-location capability supported by the equipment:


- ☐ Yes
☐ The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user.
☒ No

EXHIBIT B-EUT PHOTOGRAPHS

Please refer to the Attachment of 2604T13671E EUT Photographs.

EXHIBIT C-TEST SETUP PHOTOGRAPHS

Radiated Spurious Emissions Test View (Below 1GHz)

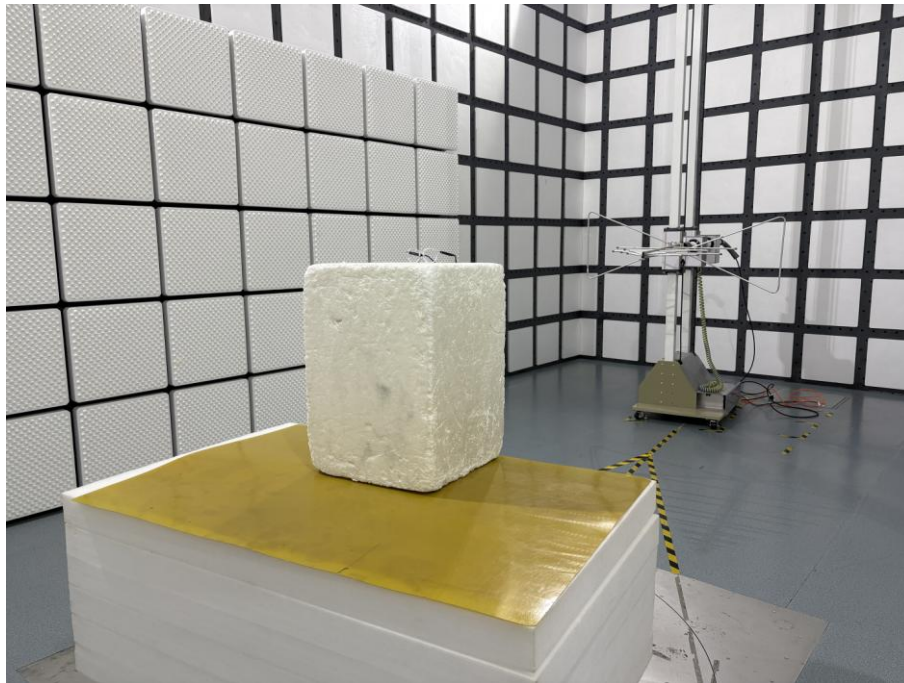

Radiated Spurious Emissions Test View (Above 1GHz)



******* END OF REPORT *******